

Fiber Optic Transceiver, SFP+, BiDi, 10G DDM, Huawei Compatible



FXC-SPB-wwxx-10-HWI

Features

- Operating Data Rates up to 11.3 Gbps
- Distance Range 10, 40, 60 & 80 km
- Pluggable Bi-Directional SFP+ Simplex LC Connectors
- Standard Temperature Range (available in Industrial Operating Temperatures)
- Compliant with Huawei system level specifications

Applications

- Telecommunication Service Providers
- Metro Ethernet
- OTN And Other Optical Links
- Transport Networks
- Enterprise Optical Networks
- Carrier Ethernet

Description

The L-com FXC-SPB-wwxx-10-HWI is the highest quality Bi-Directional SFP+ transceiver series in the industry that delivers a dependable 10G Ethernet data rates. This SFP+ BiDi transceiver series has been designed, programmed and tested to be 100% compliant with the Huawei system level specifications. The L-com FXC-SPB-wwxx-10-HWI series has different distances options of 10, 40, 60 & 80 km to meet current and future networking requirements. The L-com FXC-SPB-wwxx-10-HWI series features digital diagnostics for performance monitoring of this BiDi transceiver. The L-com FXC-SPB-wwxx-10-HWI series is one of thousands of fiber optic connectivity products available with in-stock inventory and ready to ship. Contact our technical support and sales staff with your questions on fiber optic connectivity or other L-com products.

Configuration

| | |
|----------------------------|---------|
| Data Rate | 10 Gbps |
| Form Factor | SFP+ |
| Connector | LC |
| Connector Mode | Simplex |
| Mfg Platform Compatibility | Huawei |

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|----------------------|---------|---------|---------|-------|
| Power Supply Voltage | 3.15 | 3.3 | 3.45 | V |
| Power Supply Current | | | 430 | mA |

*See table below

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[FXC-SPB-wwxx-10-HWI](#)

Fiber Optic Transceiver, SFP+, BiDi, 10G DDM, Huawei Compatible



FXC-SPB-wwxx-10-HWI

Optical Specifications

| Base Part Number | Distance (km) | Wavelength pair designator (ww) | Transmitter center wavelength (nm) | Receiver center wavelength (nm) | Transmitter Output (min/max) dBm | Receiver Sensitivity (min) dBm |
|------------------|---------------|---------------------------------|------------------------------------|---------------------------------|----------------------------------|--------------------------------|
| FXC-SPB-ww10-10 | 10 | 23 | 1270 | 1330 | -5/0 | -14 |
| | | 32 | 1330 | 1270 | -5/0 | -14 |
| FXC-SPB-ww40-10 | 40 | 23 | 1270 | 1330 | 1/5 | -15 |
| | | 32 | 1330 | 1270 | 1/5 | -15 |
| FXC-SPB-ww60-10 | 60 | 23 | 1270 | 1330 | 1/6 | -20 |
| | | 32 | 1330 | 1270 | 1/6 | -20 |
| FXC-SPB-ww80-10 | 80 | 45 | 1490 | 1550 | -1/4 | -20 |
| | | 54 | 1550 | 1490 | -1/4 | -20 |

Size

Length 1.755 in [44.58 mm]
Weight 0.05 lbs [22.68 g]

Environmental Specifications

Temperature

Operating Range 0 to +70 deg C
Storage Range -40 to +85 deg C

Notes:

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

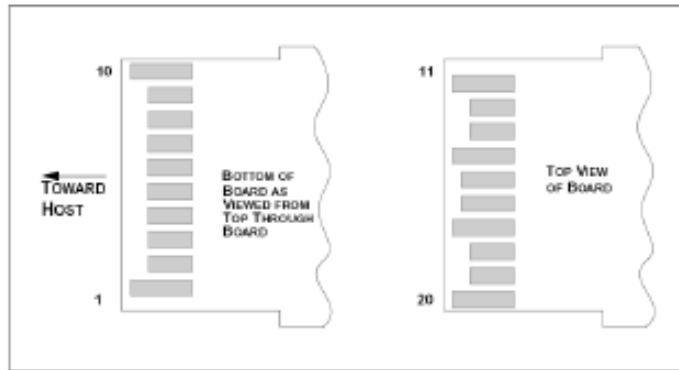
Notes:

Fiber Optic Transceiver, SFP+, BiDi, 10G DDM, Huawei Compatible

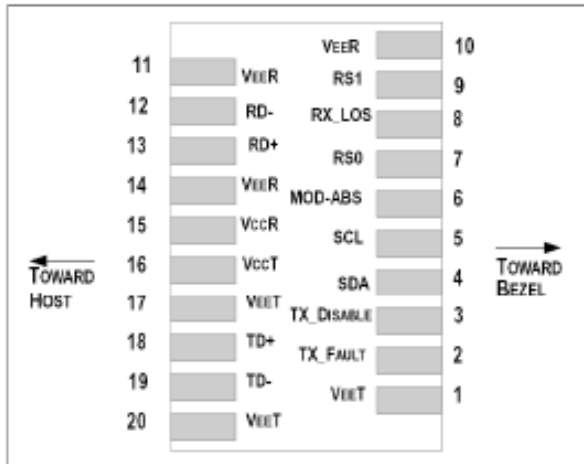


FXC-SPB-wwxx-10-HWI

SFP+ Transceiver Electrical Pad Layout



Pin Function Definitions



Fiber Optic Transceiver, SFP+, BiDi, 10G DDM, Huawei Compatible



FXC-SPB-wwxx-10-HWI

| Pin Num. | Name | FUNCTION | Plug Seq. | Notes |
|----------|------------|------------------------------|-----------|---|
| 1 | VeeT | Transmitter Ground | 1 | Note 5 |
| 2 | TX Fault | Transmitter Fault Indication | 3 | Note 1 |
| 3 | TX Disable | Transmitter Disable | 3 | Note 2, Module disables on high or open |
| 4 | SDA | Module Definition 2 | 3 | 2-wire Serial Interface Data Line. |
| 5 | SCL | Module Definition 1 | 3 | 2-wire Serial Interface Clock. |
| 6 | MOD_ABS | Module Definition 0 | 3 | Note 3 |
| 7 | RS0 | RX Rate Select (LVTTTL). | 3 | No Function Implement. |
| 8 | RX LOS | Loss of Signal | 3 | Note 4 |
| 9 | RS1 | TX Rate Select (LVTTTL). | 1 | No Function Implement. |
| 10 | VeeR | Receiver Ground | 1 | Note 5 |
| 11 | VeeR | Receiver Ground | 1 | Note 5 |
| 12 | RD- | Inv. Received Data Out | 3 | Note 6 |
| 13 | RD+ | Received Data Out | 3 | Note 6 |
| 14 | VeeR | Receiver Ground | 1 | Note 5 |
| 15 | VccR | Receiver Power | 2 | 3.3 ± 5%, Note 7 |
| 16 | VccT | Transmitter Power | 2 | 3.3 ± 5%, Note 7 |
| 17 | VeeT | Transmitter Ground | 1 | Note 5 |
| 18 | TD+ | Transmit Data In | 3 | Note 8 |
| 19 | TD- | Inv. Transmit Data In | 3 | Note 8 |
| 20 | VeeT | Transmitter Ground | 1 | Note 5 |

Fiber Optic Transceiver, SFP+, BiDi, 10G DDM, Huawei Compatible



FXC-SPB-wwxx-10-HWI

Notes:

- 1) TX Fault is an open collector/drain output, which should be pulled up with a 4.7K – 10K Ω resistor on the host board. Pull up voltage between 2.0V and $V_{ccT}/R+0.3V$. When high, output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.
- 2) TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7K – 10 K Ω resistor. Its states are:
Low (0 – 0.8V): Transmitter on
(>0.8, < 2.0V): Undefined
High (2.0 – 3.465V): Transmitter Disabled
Open: Transmitter Disabled
- 3) Module Absent, connected to VeeT or VeeR in the module.
- 4) RX LOS (Loss of Signal) is an open collector/drain output, which should be pulled up with a 4.7K – 10K Ω resistor. Pull up voltage between 2.0V and $V_{ccT}/R+0.3V$. When high, this output indicates the received optical power is below the worst-case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.
- 5) The module signal ground contacts, VeeR and VeeT, should be isolated from the module case.
- 6) RD-/+ : These are the differential receiver outputs. They are AC coupled 100 Ω differential lines which should be terminated with 100 Ω (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board. The voltage swing on these lines will be between 120 and 800 mV differential (60 –400 mV single ended) when properly terminated.
- 7) VccR and VccT are the receiver and transmitter power supplies. They are defined as 3.3V \pm 5% at the SFP+ connector pin. Maximum supply current is 606mA. Recommended host board power supply filtering is shown below. Inductors with DC resistance of less than 1 ohm should be used in order to maintain the required voltage at the SFP+ input pin with 3.3V supply voltage. When the recommended supply-filtering network is used, hot plugging of the SFP+ transceiver module will result in an inrush current of no more than 30mA greater than the steady state value. VccR and VccT may be internally connected within the SFP+ transceiver module.
- 8) TD-/+ : These are the differential transmitter inputs. They are AC-coupled, differential lines with 100 Ω differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board. The inputs will accept differential swings of 150 – 1200 mV (75 – 600mV single-ended).

Fiber Optic Transceiver, SFP+, BiDi, 10G DDM, Huawei Compatible




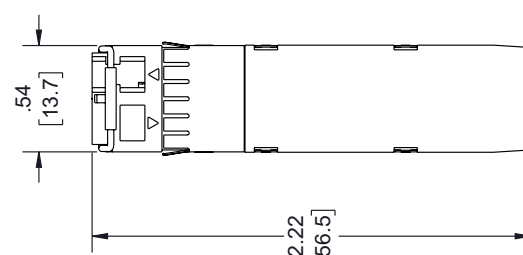

FXC-SPB-wwxx-10-HWI

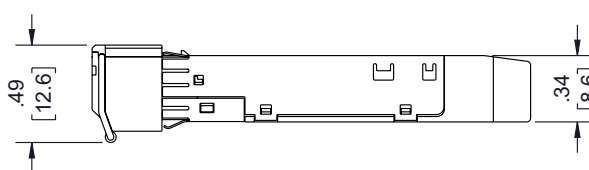
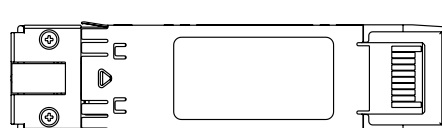
Fiber Optic Transceiver, SFP+, BiDi, 10G DDM, Huawei Compatible from L-com has same day shipment for domestic and International orders. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

| REVISIONS | | |
|-----------|-----------------|-----------------------|
| REV. | DESCRIPTION | DATE |
| A | INITIAL RELEASE | 10/28/2022 |
| | | APPROVED PHOSPODAR |

NOTES:

- THE ITEM NUMBER "FXC-SPB-WWXX-RR-PPP" IS CODED FOR SFP+ BiDi TRANSCEIVERS: "WW" REFERS TO THE BiDi WAVELENGTH; "XX" REFERS TO THE DISTANCE RANGE OF THE BiDi TRANSCEIVER; "RR" REFERS TO THE OPERATION DATA RATE; "PPP" DENOTES THE OEM COMPATIBLE PLATFORM.
- ITEM SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE IN INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:


| | |
|---------------------|------------------|
| .X = ±.2 [5.08] | FRACTIONS ± 1/32 |
| .XX = ±.02 [.51] | ANGLES ± 1° |
| .XXX = ±.005 [.13] | |

CABLE LENGTH (L) TOLERANCES:

| | | |
|--------------|------------------|-----------------|
| L ≤ 12 [305] | < L ≤ 60 [1524] | = +1 [25] / -0 |
| 60 [1524] | < L ≤ 120 [3048] | = +4 [102] / -0 |
| 120 [3048] | < L ≤ 300 [7620] | = +6 [152] / -0 |
| 300 [7620] | < L | = +5%L / -0 |

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION



THE INFORMATION AND DIMENSIONS SHOWN ARE THE PROPERTY OF L-COM GLOBAL CONNECTIVITY. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

L-com™
an INFINITE brand

50 High Street, West Mill, 3rd Floor, Suite #30
North Andover, MA 01845, USA.
Phone: 1.800.341.5266 | 1.978.682.6936
Fax: 1.978.689.9484
Website: www.L-com.com
E-mail: CustomerService@L-com.com

ITEM NO. FXC-SPB-WWXX-RR-PPP

SIZE A

CAGE CODE 43321

DRAWN BY HBAKKE