


## DUAL AUDIO OPERATIONAL AMPLIFIER

### General Description

The JRC4560 is a high-gain, wide-bandwidth, dual operational amplifier capable of driving 20V peak-to-peak into 400-Ω loads. The JRC4560 combines many of the features of the JRC4558, but with wider bandwidth and higher slew rate, making this device ideal for active filters, data and telecommunications, and many instrumentation applications.

### Features


- Operating Voltage  $\pm 2\text{ V}$  to  $\pm 18\text{ V}$
- Low Noise Voltage  $1.2\text{ }\mu\text{Vrms}$  (Typ)
- Wide GBW  $15\text{ MHz}$  (Typ)
- Low THD  $0.05\%$  (Typ)
- Slew Rate  $5.5\text{ V}/\mu\text{sec}$  (Typ)
- Suitable for Applications Such as Audio Preamplifier, Active Filter, Headphone Amplifier, Industrial Measurement Equipment

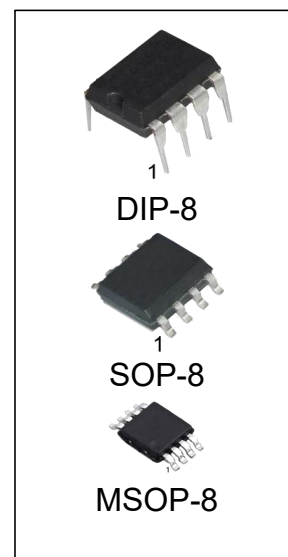


### Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
JRC4560PG	DIP-8	4560	TUBE	2000pcs/Box
JRC4560DRG	SOP-8	4560	REEL	2500pcs/Reel
JRC4560DGKRG	MSOP-8	4560	REEL	3000pcs/Reel

### Pin Connection

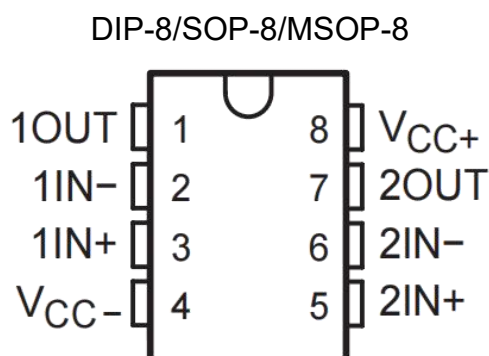

## Equivalent Circuit

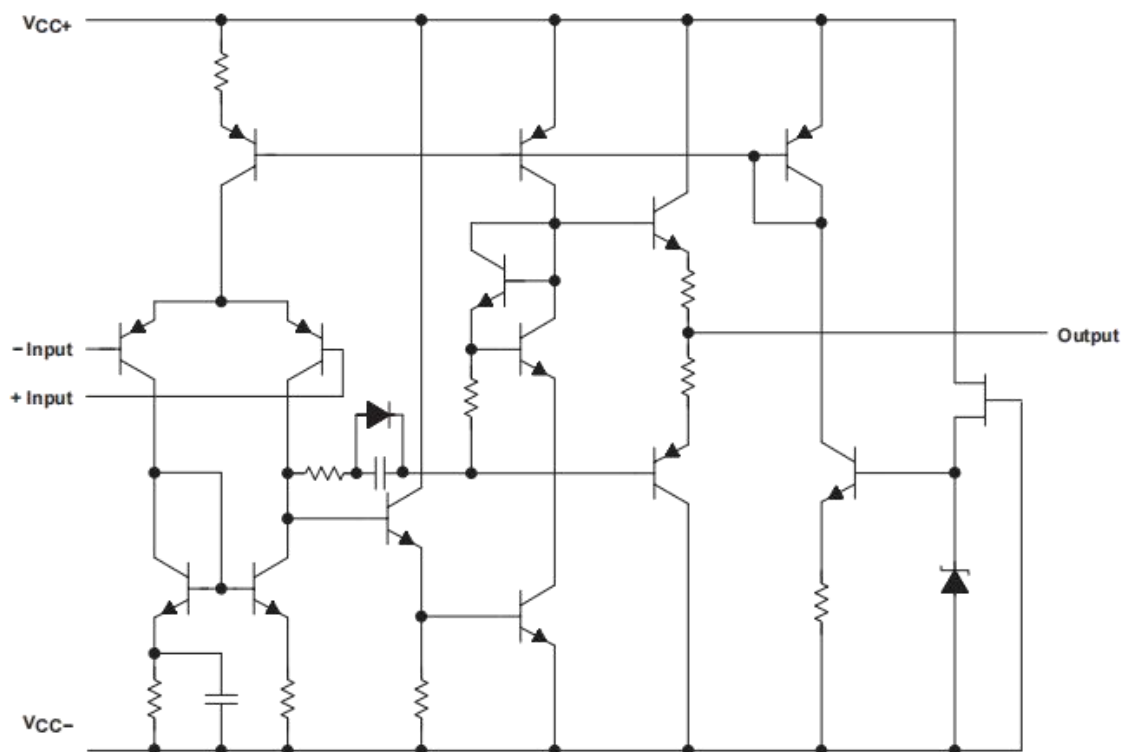

### Absolute Maximum Ratings Over Operating Free-Air Temperature Range (Unless Otherwise Noted)†

Symbol	Condition	Min	Max	Unit
VCC±	Supply voltage	-18	+18	V
VCC±	Input voltage(any input)	-15	+15	V
ISC	Output current	-15	+15	mA
θJA	Package thermal impedance(see Notes 1 and 2):	SOP	97	°C/W
		MSOP	172	°C/W
		DIP	85	°C/W
TJ	Operating virtual junction temoerature	-	150	°C
TL	Lead Temperature (Soldering, 10 seconds)	-	245	°C
Tstg	Storage temperature range	-60	+125	°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum -rated conditions for extended periods may affect device reliability.

#### NOTES:

- Maximum power dissipation is a function of TJ(max), θJA, and TA. The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = (T_J(\text{max}) - T_A) / \theta_{JA}$ . Operating at the absolute maximum TJ of 150°C can affect reliability.
- The package thermal impedance is calculated in accordance with JESD 51-7.

## Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
$V_{CC+}$	Supply voltage	2	16	V
$V_{CC-}$		-2	-16	
$V_{ID}$	Differential input voltage		$\pm 30$	V
$V_{ICR}$	Input common mode range	-14	14	V
$T_A$	Operating free-air temperature range	-40	85	$^{\circ}\text{C}$

## Electrical Characteristics, $V_{CC\pm} = \pm 15\text{ V}$ , $T_A = 25^{\circ}\text{C}$ (unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$V_{IO}$	Input offset voltage	$R_S \leq 10\text{K}\Omega$		0.5	6	mV
$I_{IO}$	Input offset current			5	200	nA
$I_{IB}$	Input bias current			40	500	nA
$A_{VD}$	Large-signal differential voltage amplification	$R_L \geq 2\text{K}\Omega, V_O = \pm 10\text{V}$	86	100		dB
$r_i$	Input resistance		0.3	5		$\text{M}\Omega$
$V_O$	Output voltage swing	$R_L \geq 2\text{K}\Omega$	$\pm 12$	$\pm 14$		V
		$I_O = 25\text{mA}$	$\pm 10$	$\pm 12.5$		
$V_{ICR}$	Common-mode input voltage range		$\pm 12$	$\pm 14$		V
CMRR	Common-mode rejection ratio	$R_S \leq 10\text{K}\Omega$	70	90		dB
$k_{SVR}^{\dagger}$	Supply-voltage rejection ratio	$R_S \leq 10\text{K}\Omega$	76.5	90		dB
$I_{CC}$	Supply current (all amplifiers)			4.3	5.7	mA


$\dagger$  Measured with  $V_{CC\pm}$  differentially varied simultaneously from  $\pm 4\text{ V}$  to  $\pm 15\text{ V}$

## Operating Characteristics, $V_{CC\pm} = \pm 15\text{ V}$ , $T_A = 25^{\circ}\text{C}$ (unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
SR	Slew rate at unity gain			5.5		$\text{V}/\mu\text{s}$
GBW	Gain bandwidth product			15		MHz
THD	Total harmonic distortion	$V_O = 5\text{V}, R_L = 2\text{K}\Omega, f = 1\text{KHz}, A_{VD} = 20\text{dB}$		0.05		%
$V_n$	Equivalent input noise voltage	RIAA, $R_S \leq 2\text{K}\Omega$ , 30KHz LPF		1.2		$\mu\text{V}_{\text{rms}}$

## Physical Dimensions


### SOP-8

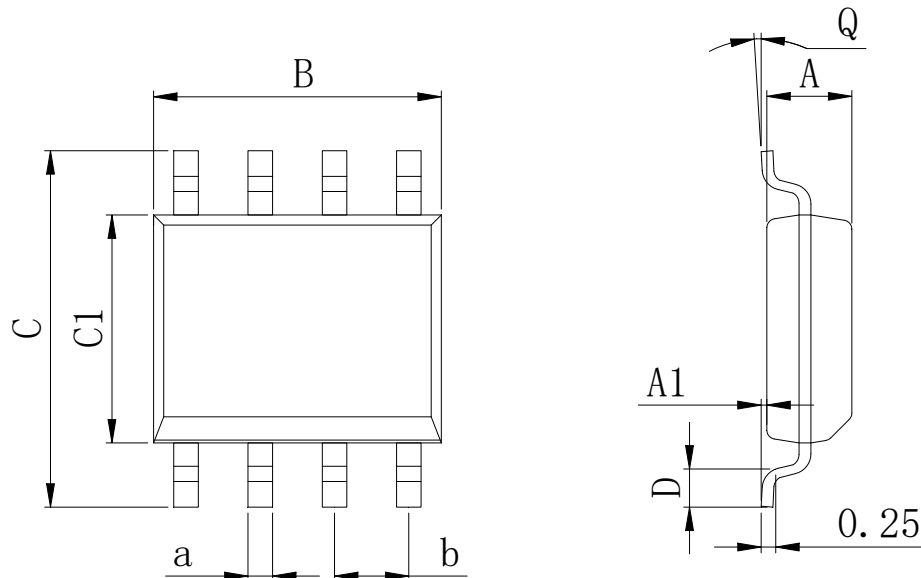

**Dimensions In Millimeters(SOP-8)**

Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	4.90	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	5.10	6.20	4.00	0.80	8°	0.45	

### DIP-8

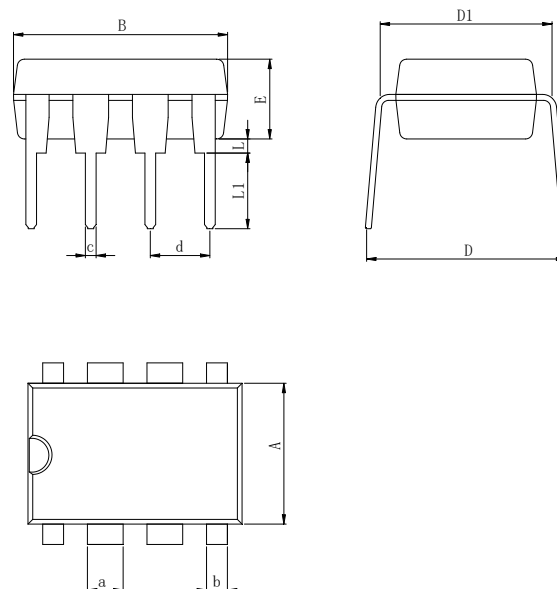


**Dimensions In Millimeters(DIP-8)**

Symbol:	A	B	D	D1	E	L	L1	a	b	c	d
Min:	6.10	9.00	8.10	7.42	3.10	0.50	3.00	1.50	0.85	0.40	2.54 BSC
Max:	6.68	9.50	10.9	7.82	3.55	0.70	3.60	1.55	0.90	0.50	

## Physical Dimensions

MSOP-8

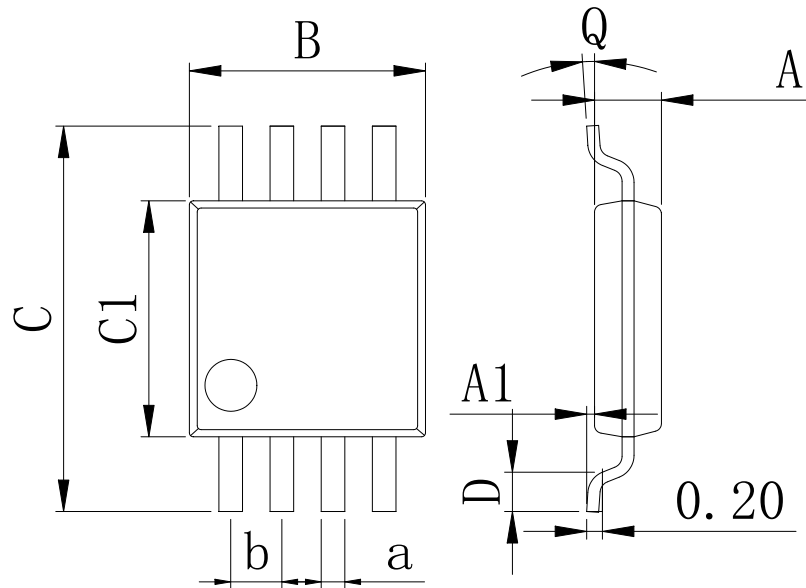

Dimensions In Millimeters(MSOP-8)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	0.80	0.05	2.90	4.75	2.90	0.35	0°	0.25	0.65 BSC
Max:	0.90	0.20	3.10	5.05	3.10	0.75	8°	0.35	

## Revision History

DATE	REVISION	PAGE
2020-3-5	New	1-7
2024-8-20	Document reformatting	1-7

**IMPORTANT STATEMENT:**

Hanschip Semiconductor reserves the right to change its products and services without notice. Before ordering, the customer shall obtain the latest relevant information and verify whether the information is up to date and complete. Hanschip Semiconductor does not assume any responsibility or obligation for the altered documents.

Customers are responsible for complying with safety standards and taking safety measures when using Hanschip Semiconductor products for system design and machine manufacturing. You will bear all the following responsibilities: select the appropriate Hanschip Semiconductor products for your application; Design, validate and test your application; Ensure that your application meets the appropriate standards and any other safety, security or other requirements. To avoid the occurrence of potential risks that may lead to personal injury or property loss.

Hanschip Semiconductor products have not been approved for applications in life support, military, aerospace and other fields, and Hanschip Semiconductor will not bear the consequences caused by the application of products in these fields. All problems, responsibilities and losses arising from the user's use beyond the applicable area of the product shall be borne by the user and have nothing to do with Hanschip Semiconductor, and the user shall not claim any compensation liability against Hanschip Semiconductor by the terms of this Agreement.

The technical and reliability data (including data sheets), design resources (including reference designs), application or other design suggestions, network tools, safety information and other resources provided for the performance of semiconductor products produced by Hanschip Semiconductor are not guaranteed to be free from defects and no warranty, express or implied, is made. The use of testing and other quality control technologies is limited to the quality assurance scope of Hanschip Semiconductor. Not all parameters of each device need to be tested.

The documentation of Hanschip Semiconductor authorizes you to use these resources only for developing the application of the product described in this document. You have no right to use any other Hanschip Semiconductor intellectual property rights or any third party intellectual property rights. It is strictly forbidden to make other copies or displays of these resources. You should fully compensate Hanschip Semiconductor and its agents for any claims, damages, costs, losses and debts caused by the use of these resources. Hanschip Semiconductor accepts no liability for any loss or damage caused by infringement.