

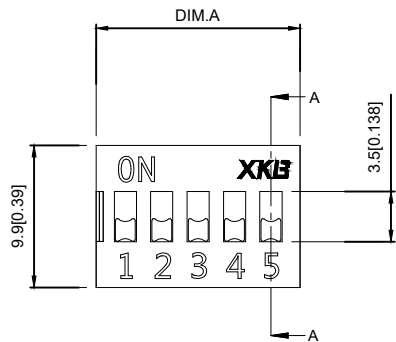





Projection(P)

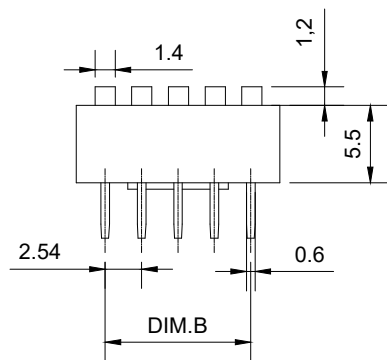

Short(S)



SECTION A-A



PART NO.	NO.OF POS	DIM.A	DIM.B	Cover/Red(R)		Cover/Blue(BL)	
				Projection(P)	Short(S)	Projection(P)	Short(S)
DS-01	1	4.06		DS-01RP	DS-01RS	DS-01BLP	DS-01BLS
DS-02	2	6.6	2.54	DS-02RP	DS-02RS	DS-02BLP	DS-02BLS
DS-03	3	9.14	5.08	DS-03RP	DS-03RS	DS-03BLP	DS-03BLS
DS-04	4	11.68	7.62	DS-04RP	DS-04RS	DS-04BLP	DS-04BLS
DS-05	5	14.22	10.16	DS-05RP	DS-05RS	DS-05BLP	DS-05BLS
DS-06	6	16.76	12.7	DS-06RP	DS-06RS	DS-06BLP	DS-06BLS
DS-07	7	19.3	15.24	DS-07RP	DS-07RS	DS-07BLP	DS-07BLS
DS-08	8	21.84	17.78	DS-08RP	DS-08RS	DS-08BLP	DS-08BLS
DS-09	9	24.38	20.32	DS-09RP	DS-09RS	DS-09BLP	DS-09BLS
DS-10	10	26.92	22.86	DS-10RP	DS-10RS	DS-10BLP	DS-10BLS
DS-12	12	32	27.94	DS-12RP	DS-12RS	DS-12BLP	DS-12BLS

SPECIFICATION

Contact Rating:	25mA,24V DC
Contact Resistance:	50mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	500V AC/1minute
Operating Force:	1000gf max
Travel:	2mm
Operating Life:	3000cycles
Operating Temp:	-20℃~+70℃
Storage Temp:	-30℃~+80℃

4	Terminal		Copper Alloy	T: Tin plated G: Plating Gold≥15MU
3	Base	1	Pa66	Black
2	Keystake	1	Pa66	white
1	Cover	1	Pa66	Black Blue Red
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

					DSND		DATE		SCALE: N/A	MODEL TYPE: DIP SWITCH
					DWN		DATE		VIEW:	PART NO.:
					CHKD		DATE		UNIT: mm/in	DWG NO.: DS-XX-X-X
					APPD		DATE		SIZE: A4	
					XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT 1.0g
										SHEET 1/1
										REVISION A0

MARK	DESCRIPTION	DATE	REVISED	UNSPECIFIED TOLERANCES
Δx				units: mm
Δx				tolerance: X.X ±0.2mm
Δx				X.XX ±0.1mm
Δx				X.XXX ±0.05mm