
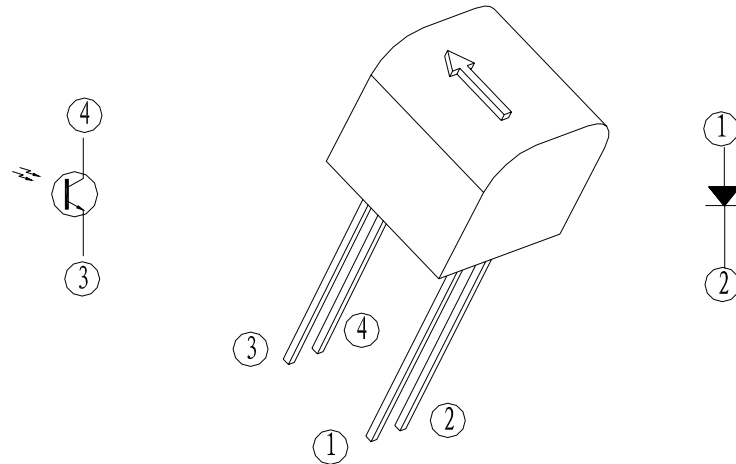


电器性能规格 Electrical Characteristics:
 工作电压operating voltage : 1.5~6V
 工作电流operating current : < 10MA
 工作温度Working temperature : -10~75
 开路电阻Open circuit resistance : > 10M ohm
 闭路电阻Closed circuit resistance : < 10 ohm
 导通时间Conduction time : > 2ms
 操作寿命operating life : 200,000 times

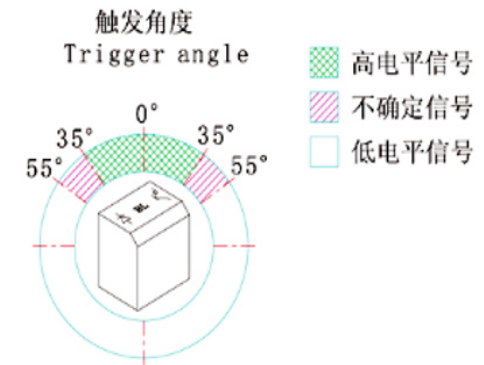

6	红外线对射管	二极管	2
5	仓盖	黄铜, 镀镍	1
4	仓体	黄铜, 镀镍	1
3	胶盖	PA66	1
2	胶芯	PA66	1
1	滚珠	黄铜, 镀镍	1
序号	零件名称	材质	数量

					units: mm	DSND	DATE	SCALE: N/A	MODEL TYPE: Vibration transducer
					tolerance:	DWN	DATE	VIEW:	PART NO.:
ΔX					X.X ±0.2mm	CHKD	DATE	UNIT: mm/in	DWG NO.:
ΔX					X.XX ±0.1mm	APPD	DATE	SIZE: A4	SR-0609-07
ΔX					X.XXX ±0.05mm				WEIGHT
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	XKB INDUSTRIAL PRECISION CO., LIMITED			SHEET
REVISIONS									REVISION
www.helloxb.com www.helloxb.cn									1.0g
									1/1
									A0