

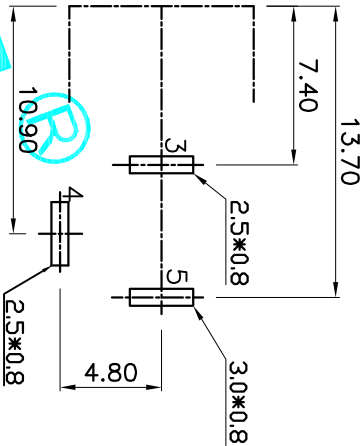
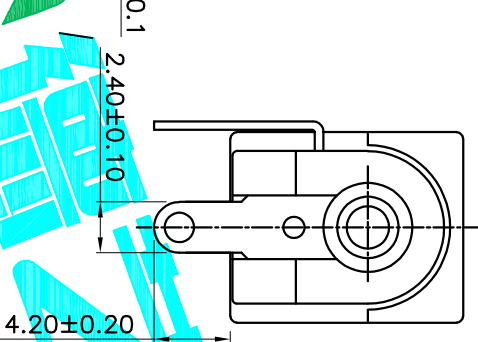
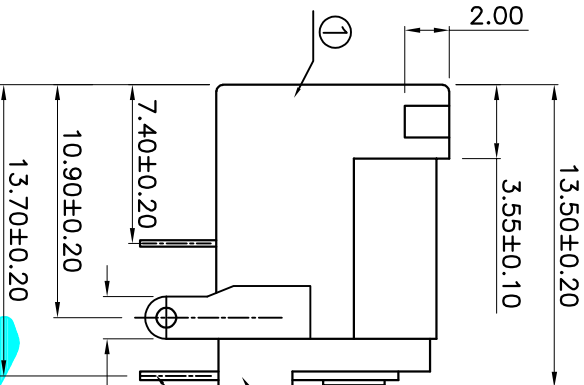
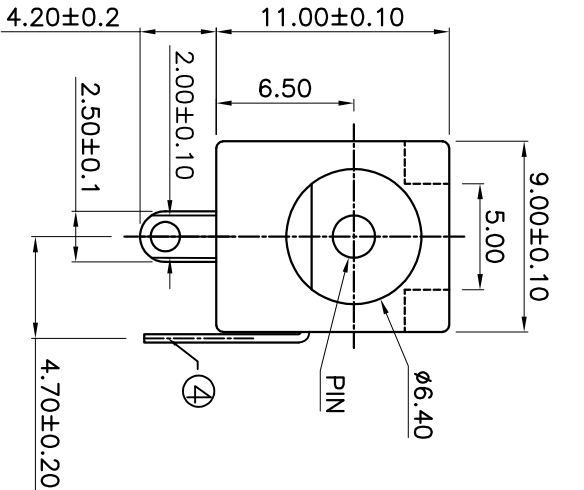


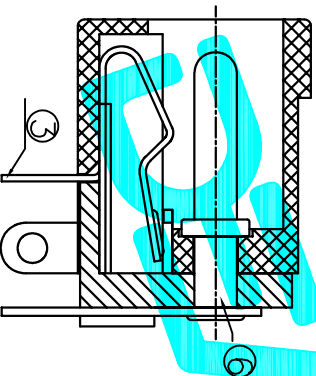

SCHEMATIC



Rating: 0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature: -20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

PIN	Ø1.65	Ø2.0	Ø2.5
APPD.			

ITEM	PIN	1	BRASS	Ni-Plating
⑥	FLAT FOOT	1	BRASS	Sn-Plating
⑤	COVER PIECE	1	BRASS	Sn-Plating
④	SPRING PIECE	1	BRONZE	Sn-Plating
③	COVER	1	PBT	
②	HOUSING	1	PBT	
①				

APPROVALS	DATE
DRAWN G.M.Chen	2024/6/20
CHECKED	
APPROVALS	

DEALON 德隆
ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	PART NO.	SCALE:	SHEET
	A		NEW				30~0.1±0.30 10~0.20 5~0.10 ±0.10	DC-D005B	1:1	1 OF 1
							±2°			PROJ.