


GT-TC006D-H060-L1


L1=100,000 Cycles

G-SWITCH

D=5-direction 160±80gf
Center push 350±150gf
F=5-direction 160±80gf
Center push 400±150gf
H=050(5.0)
H=060(6.0)

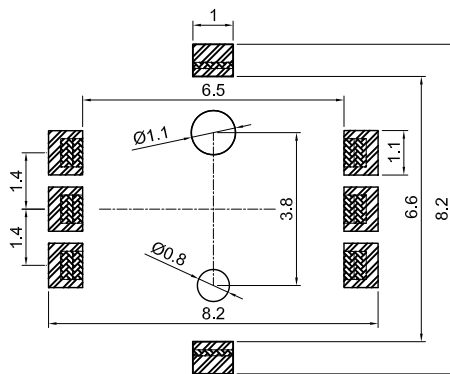

安装图 (PCB LAYOUT PLAN)



电路图 (CIRCUIT DIAGRAM)

G-Switch Specification:


Operating temperature range: -40°C to +85°C

Rating: 50mA. 12V DC

Insulation resistance: 100MΩ min. 100V DC

Dielectric strength: 250V AC for 1 min

Contact resistance: 100mΩ max.



G-Switch Electronic (HongKong) CO.,Ltd.

Unless otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

DESIGN LI QIngqi

DATE 2022.06.22

Molde code:

CHECKED

DATE

GT-TC006D-H060-L1

APPROVED

DATE

<http://www.dg-switch.com>

REV.: X1

SCALE: 4:1

UNIT: mm

TEL:0769-82388879

SIZE: A4

SHEET: 1/1

