
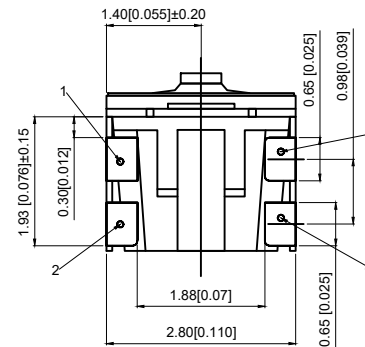





Specifications

规格

Rating: 20mA/15V

额定负荷: 20mA/15V

Contact Resistance: ≤500mΩ max

接触电阻: ≤500mΩ max

Insulation resistance: ≥50mΩ

绝缘电阻: ≥50mΩ

Dielectric strength: AC250V(50~60HZ)60S min

抗电强度: AC250V(50~60HZ)60S min

Operation force: 160±50gf

操作力: 160±50gf

Operating Life: 300,000 cycles



寿命: 300,000 cycles

Travels: 0.13±0.05mm


行程: 0.13±0.05mm

Operating Temperature range: -40°C ~ +90°C

使用温度范围: -40°C ~ +90°C



P.C.B LAND DIMENSION



CIRCUIT DIAGRAM

5	TERMINAL	1	PHOSPHORBRONZE	
4	BASE	1	PA9T	
3	CONTACT	2	STAINLESS STEEL	SILVER CLADDING
2	STEM	1	HIGH-TEMP POLYIMIDE	BLACK
1	TAPE	1	HIGH-TEMP POLYAMIDE FILM	SILVER PLATING
ITEM	DESC.	Q'TY	MATERIALS	TREATMENT

A4				 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:							
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP40521116							
A2					X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw							
A1					X.X	± 0.15	ROCPCU TECHNOLOGY CO.,LTD											
REV	DATE	REVISION	DESCRIPTION		ISSUE	X							± 0.25					
					ANGULAR	_____	Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission											
					A		B		C		D		E		F		G	