
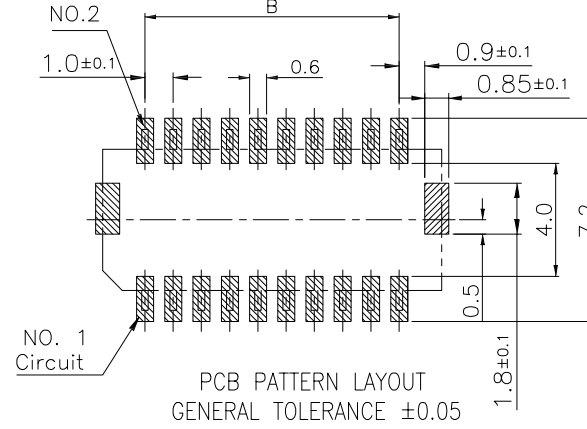


修 订	标 记	修 改 描 述	签 名	日 期
REV NO		NEW DWG		2016-03-12

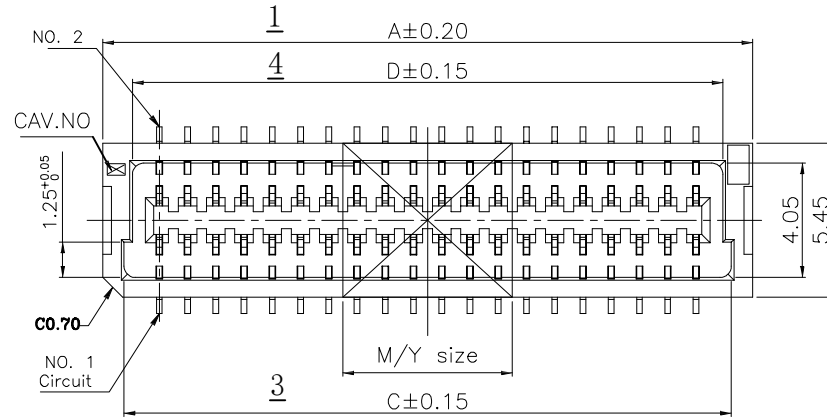

NOTES:

1. MATERIAL:

- 1.1 HOUSING: HALOGEN FREE THERMOPLASTIC, HIGH TEMP.UL94V-0; COLOR:NATURAL.
- 1.2 CONTACT: COPPER ALLOY
- 1.3 FITTING NAIL: COPPER ALLOY

2. FINISH:

- 2.1 CONTACT & SOLDER: 50~100u" NICKEL UNDER PLATING OVERALL
- 4: 3u" GOLD PLATING ON CONTACT
- 80~150u" PURE-TIN PLATING OVERALL

- 1: GOLD FLASH ON CONTACT AND 80~150u"(MIN) MATT-TIN PLATING OVERALL
- C: 15u" GOLD ON CONTACT AND 80~150u"(MIN) MATT-TIN PLATING OVERALL

2.2 FITTING NAIL:



- 50~100u" NICKEL UNDER PLATING OVERALL
- 80~150u" MATT TIN PLATING OVERALL

3. REFLOW SOLDER CAPABLE TO 260°C PER (pin)

4. Working voltage less than 36 volts (per pin)

5. Voltage: 50 Volts AC (per pin)

6. HOUSING: NY9T

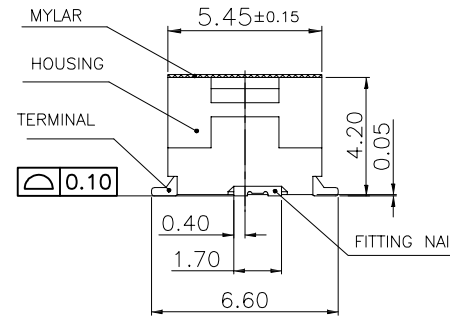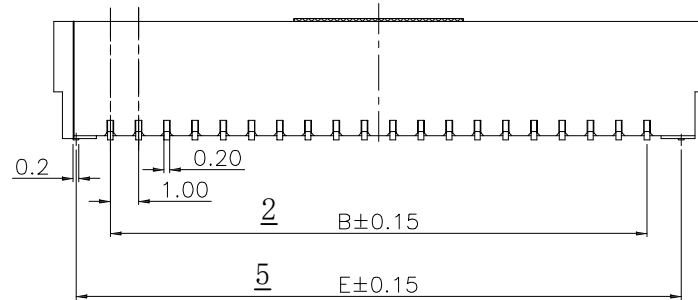

CKT	DIMA	DIMB	DIMC	DIMD	DIME
2*3	6.0	2.0	4.5	3.8	4.43
2*4	7.0	3.0	5.5	4.8	5.43
2*5	8.0	4.0	6.5	5.8	6.43
2*6	9.0	5.0	7.5	6.8	7.43
2*7	10.0	6.0	8.5	7.8	8.43
2*8	11.0	7.0	9.5	8.8	9.43
2*9	12.0	8.0	10.5	9.8	10.43
2*10	13.0	9.0	11.5	10.8	11.43
2*11	14.0	10.0	12.5	11.8	12.43
2*12	15.0	11.0	13.5	12.8	13.43
2*15	18.0	14.0	16.5	15.8	16.43
2*20	23.0	19.0	21.5	20.8	21.43
2*25	28.0	24.0	26.5	25.8	26.43



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

电话: 0755-27111225 传真: 0755-29940187

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED
公差参数表



TITLE:

产品名称: SHLD1.0双排带扣立贴针座

X.X	±0.30	X.X*	±3'	APPD: 核准:	PART NO: HDGC1006WV-S-2XnP				8
X.XX	±0.20	X.XX*	±2'	CHECK: 校对: 王建业	DATE	SCALE	UNIT	CODE NUMBER	
X.XXX	±0.10	X.XXX*	±1'	DRAW: 绘图: 黄艳兰	2016-03-12	1:1	mm	A001	