

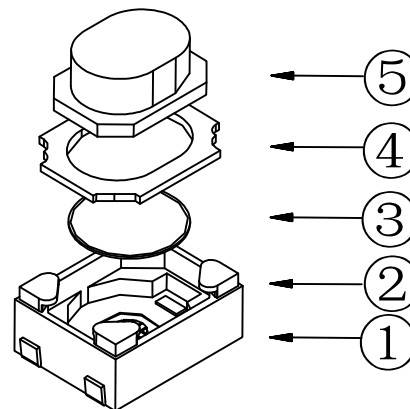






NOTES:

1. Rate Voltage :50mA
1. 额定电压: 50mA
2. Contact Resistance: $\leq 100\text{m}\Omega$
2. 接触电阻: $\leq 100\text{m}\Omega$
3. Operating Force: $160\pm 50\text{gf}$
3. 按力: $160\text{g}\pm 50\text{gf}$
4. Travel: $0.20\pm 0.1\text{mm}$
4. 行程: $0.20\pm 0.1\text{mm}$
5. Insulated Resistance: $\geq 100\text{m}\Omega$
5. 绝缘电阻: $\geq 100\text{M}\Omega$
6. Dielectric Strength: $\geq 250\text{VAC}$
6. 介电强度: $\geq 250\text{VAC}$
7. life: 100000 times
7. 寿命: 100000 次
8. working temperature: $-20^{\circ}\text{C}\sim 80^{\circ}\text{C}$
8. 工作温度: $-20^{\circ}\text{C}\sim 80^{\circ}\text{C}$

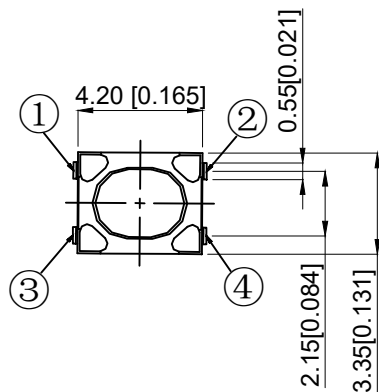

电路图
CIRCUIT DIAGRAM



5	Push-button 按钮	Silica gel	1	Bluc 蓝色
4	Blind flange 盖板	Phosphorous copper	1	Copper tin plating 镀铜锡
3	Shrapnel 弹片	SUS	1	Ag plating 镀银
2	Noumenon 本体	LCP	1	white 白色
1	Card 卡件	Phosphorous copper	1	Ag plating 镀银
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP12021625
A2					X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
A1					X.X	± 0.15	ROCPCU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION	DESCRIPTION		ISSUE	X					
					ANGULAR	_____	Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				
					A	B	C	D	E	F	G