


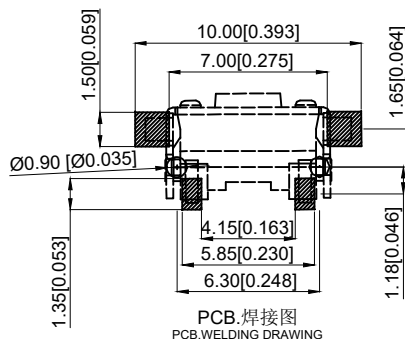



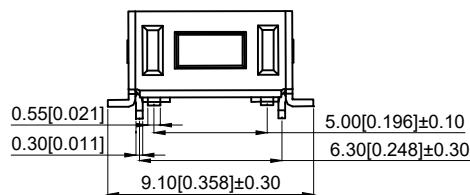

8.工作温度: $-20^{\circ}\text{C}\sim 80^{\circ}\text{C}$



电路图
CIRCUIT DIAGRAM

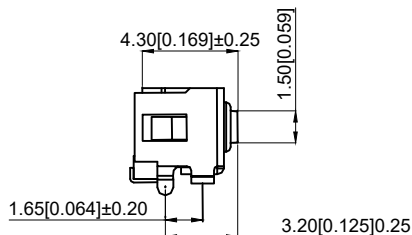

5	Push-button 按钮	LCP	1	white 白色
4	Bind flange 盖板	Iron cover plate	1	Copper tin plating 镀铜锡
3	Shrapnel 弹片	SUS	1	Ag plating 镀银
2	Noumenon 本体	LCP	1	Black 黑色
1	Card 卡件	Brass	1	Ag plating 镀银
NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注

A4				 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP12522643
A2					X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
A1					X.X	± 0.15	ROCPCU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION	DESCRIPTION		ISSUE	X					
					ANGULAR		Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				
	A		B		C		D	E	F	G	