


| | | |
|----------------|------------------|---------|
| 料号 Part NO. | 品名 Parts Name | |
| 34-E32-LED4-XX | 间隔柱 | LED4-XX |

| | |
|----------|-----|
| 料号 | L |
| LED4*5 | 5 |
| LED4*8 | 8 |
| LED4*11 | 11 |
| LED4*4 | 4 |
| LED4*9 | 9 |
| LED4*6 | 6 |
| LED4*10 | 10 |
| LED4*15 | 15 |
| LED4*12 | 12 |
| LED4*2 | 2 |
| LED4*13 | 13 |
| LED4*7 | 7 |
| LED4*14 | 14 |
| LED4*7.5 | 7.5 |
| LED4*3 | 3 |



MATERIAL: NYLON 66 (UL)
 FLAME CLASS: 94V-2
 COLOR: NATURAL (白色)
 UNIT: mm
 用途: 用於保護 ϕ 3mm LED 立於PC板上, 接腳不會彎曲. 折斷. 短路, 且使LED高度一致, 免用治具尺寸齊全。
 公差要求: 未标注公差 \pm 0.3

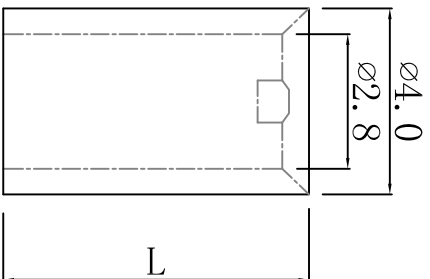

未經授權不得修改和復印
 該知識產權屬於技術質量部;

| | | | | | | | | | | | |
|------------------|------------|------|------|------|-----------------|---------|---------|-------|---------|----------------|---------------------------|
| DIMENSION | TOLERANCES | 0.0 | ±0.3 | A | NEW PART | DWG. BY | CHK. BY | DATE | DWG. BY | UNIT | mm |
| | | 0.00 | | | | | | | CHK. BY | REV. | |
| FIRST ANGLE PROJ | | | | LTR. | REVISION RECORD | | | 20105 | APP. BY | DWG. NO. | HIWA/QR-JZ-34-E32-LED4-XX |
| | | | | | | | | | | 惠華 蘇州惠華電子科技有限公 | |