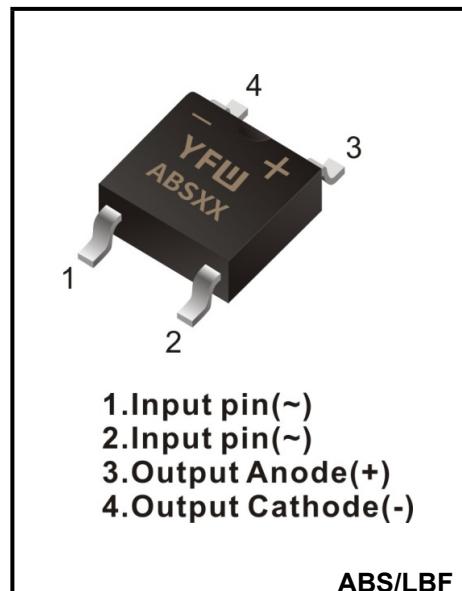


**1A SURFACE MOUNT GLASS PASSIVATED BRIDGE**
**RECTIFIER Reverse Voltage - 100 to 1000 V**
**Forward Current - 1A**
**FEATURES**

- ◆ High current capability
- ◆ Low forward voltage drop
- ◆ Glass Passivated Chip Junction
- ◆ Low power loss, high efficiency
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives


**MECHANICAL DATA**

- ◆ Case: ABS/LBF
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 88mg / 0.0031oz


**Maximum Ratings and Electrical characteristics**

Ratings at 25 °C ambient temperature unless otherwise specified.


Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	ABS1	ABS2	ABS4	ABS6	ABS8	ABS10	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	100	200	400	600	800	1000	<b>V</b>
Maximum RMS voltage	$V_{RMS}$	70	140	280	420	560	700	<b>V</b>
Maximum DC Blocking Voltage	$V_{DC}$	100	200	400	600	800	1000	<b>V</b>
Average Rectified Output Current at $T_c = 125^\circ\text{C}$	$I_o$	1						<b>A</b>
Peak Forward Surge Current 8.3 ms Single Half Sine-Wave Superimposed on Rated Load(JEDEC method)	$I_{FSM}$	35						<b>A</b>
Forward Voltage per element @ $I_F = 1.0\text{A}$	$V_F$	1.1						<b>V</b>
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ @ $T_A=100^\circ\text{C}$ @ $T_A=125^\circ\text{C}$	$I_R$	5 50 100						<b>μA</b>
Typical Junction Capacitance (Note1)	$C_j$	13						<b>pF</b>
Typical Thermal Resistance (Note2)	$R_{θJA}/R_{θJC}$	72/20						<b>°C/W</b>
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150						<b>°C</b>


(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

(2) Mounted on glass epoxy PC board with 4×1.5"×1.5" (3.81×3.81 cm) copper pad.


**Fig.1 Average Rectified Output Current Derating Curve**

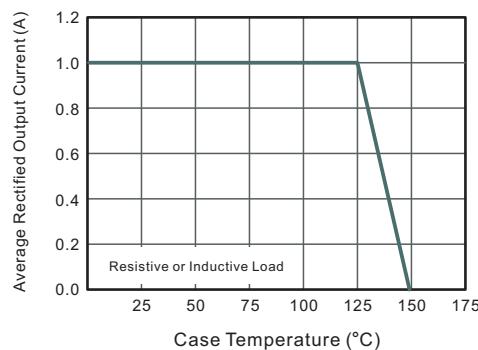


**Fig.2 Typical Reverse Characteristics**

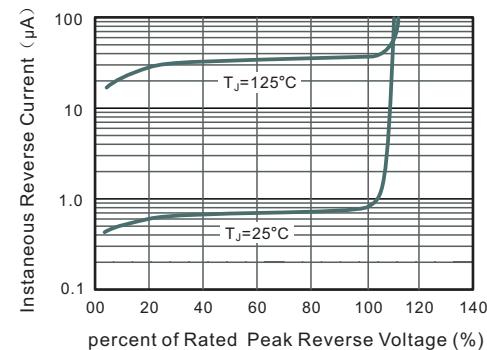


**Fig.3 Typical Instantaneous Forward Characteristics**

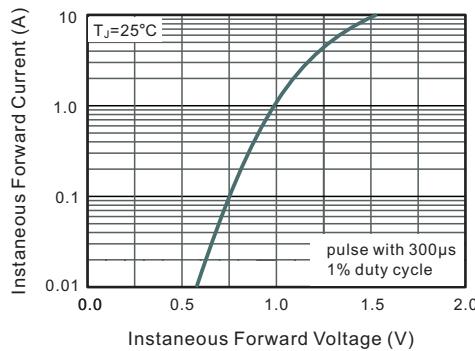

**Fig.4 Typical Junction Capacitance**

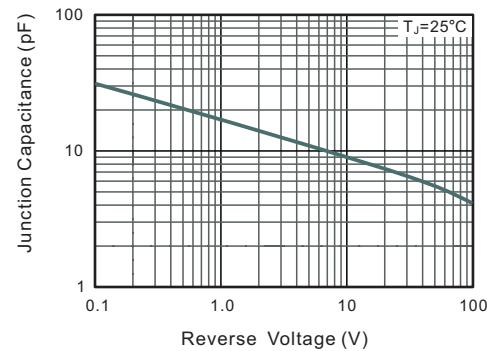


**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

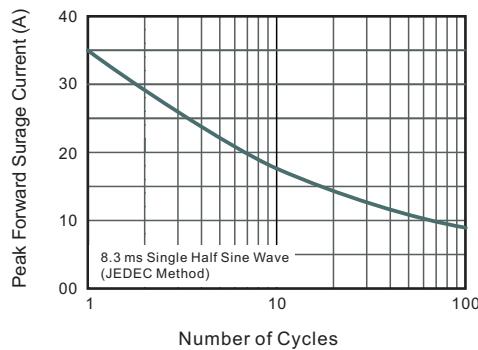

## Package Outline


## ABS/LBF

Plastic surface mounted package; 4leads

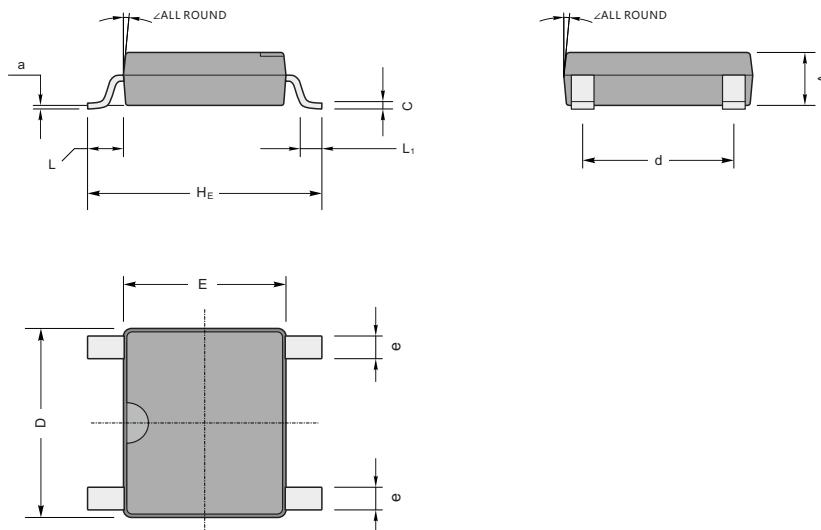

UNIT		A	C	D	E	H <sub>E</sub>	d	e	L	L <sub>1</sub>	a	∠	
mm	max	1.5	0.22	5.2	4.5	6.4	4.2	0.7	0.95	0.6	0.2	7°	
	min	1.3	0.15	4.9	4.2	6.0	3.8	0.5					
mil	max	59	8.7	205	177	252	165	28	37	24	8		
	min	51	5.9	193	166	236	150	20					

### The recommended mounting pad size

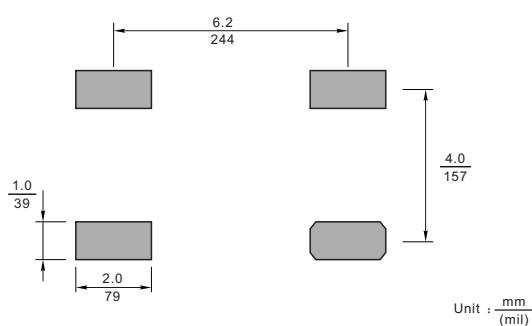

### Summary of Packing Options

Package	Packing Description	Packing Quantity	Industry Standard
ABS/LBF	Tape/Reel,13"reel	5000	EIA-481-1