

SOD-323 Surface Mount Schottky Barrier Rectifier

● Features

- $V_R=10V$
- $I_{F(AV)}=3.0A$
- Low Turn-on Voltage
- Fast switching speed
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260°C

● Applications

For use in low voltage high frequency circuit signals.



● Mechanical Data

- Case: SOD-323
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Cathode line denotes the cathode end

● Function Diagram

Reverse Voltage
10 V
Forward Current
3.0 Ampere

SOD-323



● Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Maximum repetitive peak reverse voltage	V_{RRM}	V	10
Maximum RMS voltage	V_{RMS}	V	10
Maximum DC blocking voltage	V_{DC}	V	10
Maximum average forward rectified current	$I_{F(AV)}$	A	3.0
Non-repetitive Peak Forward Surge Current @ t=8.3ms Half-sine wave	I_{FSM}	A	5.0
Power Dissipation	P_D	mW	350
Junction Temperature	T_j	°C	125
Storage temperature range	T_{STG}	°C	-65 ~+150
Typical thermal resistance	$R_{\theta JA}$	°C /W	286

● **Electrical Characteristics** (Ta=25°C Unless otherwise noted)

PARAMETER	TEST CONDITIONS	SYMBOL	UNIT	Min	Type	Max
Maximum forward voltage	I _F =100mA	V _F	V	—	0.33	0.38
	I _F =500mA			—	0.41	0.50
	I _F =1000mA			—	0.45	0.60
Maximum reverse current	V _R =5V	I _R	μA	—	—	15
	V _R =8V			—	—	25
Capacitance between terminals	V _R = 5.0V, f = 1MHz	C _T	pF	—	30	—

● **Ratings And Characteristics Curves** (Ta=25°C Unless otherwise specified)

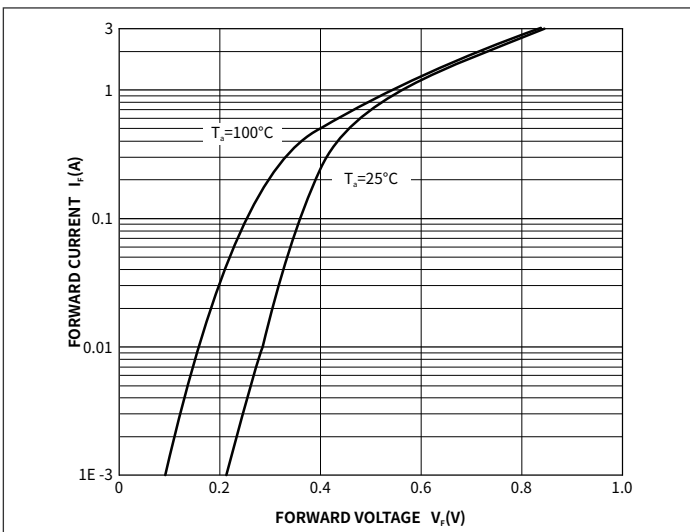


Fig.1 Typical Instantaneous Forward Characteristics

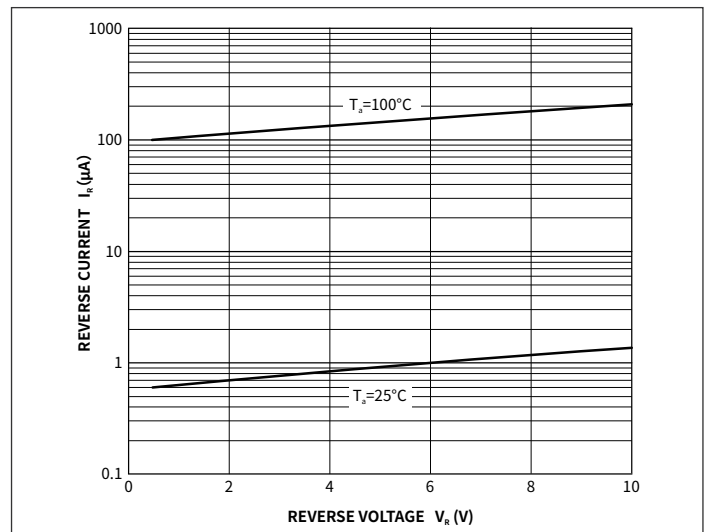


Fig.2 Typical Reverse Characteristics

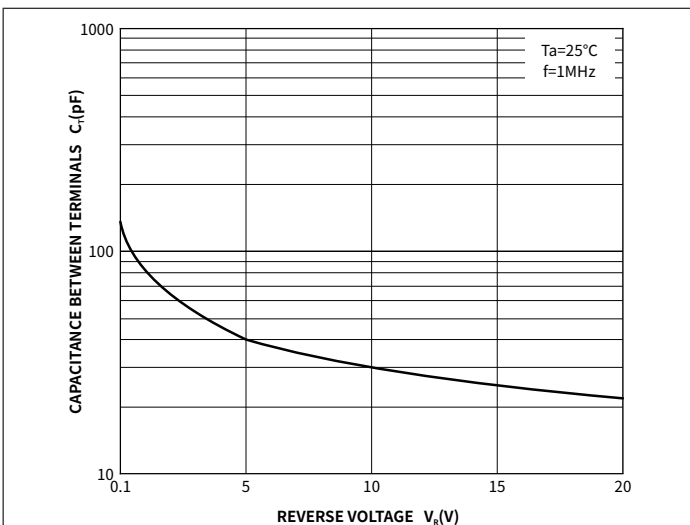


Fig.3 Typical Junction Capacitance

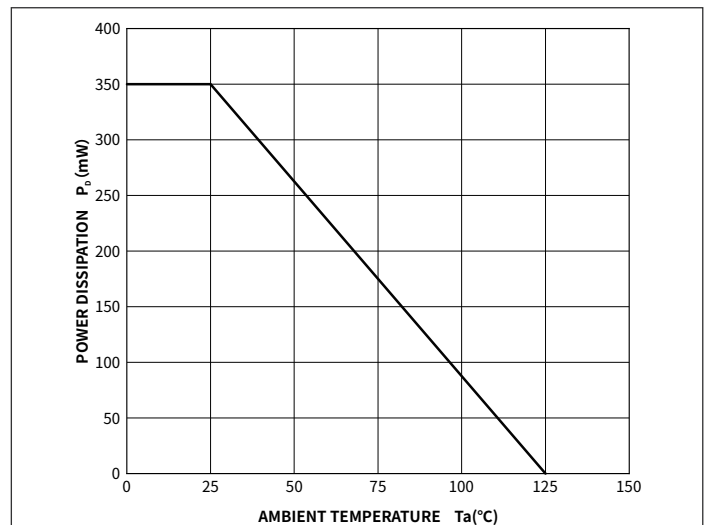


Fig.4 Power Derating Curve

BAT60B

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOD-323	R1	0.0048	3000	45000	180000	7"

Package Outline Dimensions (SOD-323)

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.60	1.80	0.063	0.071
B	0.25	0.40	0.010	0.016
C	2.30	2.80	0.091	0.110
D	0.80	1.10	0.031	0.043
D ₁	0.80	0.90	0.031	0.035
E	1.20	1.40	0.047	0.055
F	0.08	0.18	0.003	0.007
L	0.475REF		0.019REF	
L ₁	0.25	0.40	0.010	0.016
H	-	0.14	-	0.006

Suggested Pad Layout

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
X	0.65	0.75	0.026	0.030
Y	0.65	0.75	0.026	0.030
Z	2.10	2.20	0.084	0.088