



EABS1U-EABS6U

SURFACE MOUNT SUPER FAST BRIDGE RECTIFIERS


Features

- Glass passivated die construction ABS
- Low forward voltage drop
- High current capability
- High surge current capability
- Designed for surface mount application
- Plastic material-UL flammability 94V-O
- UL Recognized File # E476623

Mechanical Data

- Case: SOPA-4, molded plastic
- Terminals: plated leads solderable per MIL-STD-202, Method 208
- Polarity: as marked on case
- Mounting position: Any
- Marking: type number

ABS

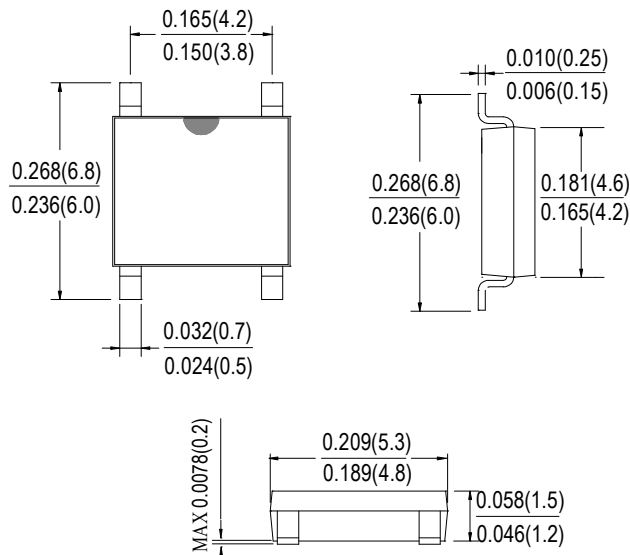

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.
Single Phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	EABS1U	EABS2U	EABS4U	EABS6U	UNITS
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM}	100	200	400	600	V
	V _{RWM}					
	V _{DC}					
RMS Reverse Voltage	V _{RMS}	70	140	280	420	V
Average Rectified Output Current @T _c =100 °C	IF(AV)	1.0				A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	35				A
Rating for fusing (t<8.3ms)	I ² t	5.084				A ² s
Forward Voltage per element @IF=1.0A	V _{FM}	0.95		1.25	1.7	V
Maximum Reverse Recovery Time (Note 1)	T _{rr}	35				ns
Peak Reverse Current @T _A =25 °C At Rated DC Blocking Voltage @T _A =125 °C	I _R	5.0 200				uA
Typical Thermal Resistance per leg	R _{θJA}	62.5				°C/W
	R _{θJL}	25				
Operating and Storage Temperature Range	T _J ,T _{STG}	-55to+150				°C

Note: 1.Reverse Recovery Test Conditions: $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $IRR = 0.25\text{A}$.



EABS1U-EABS6U

SURFACE MOUNT SUPER FAST BRIDGE RECTIFIERS

Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

FIG.1 FORWARD CURRENT DERATING CURVE

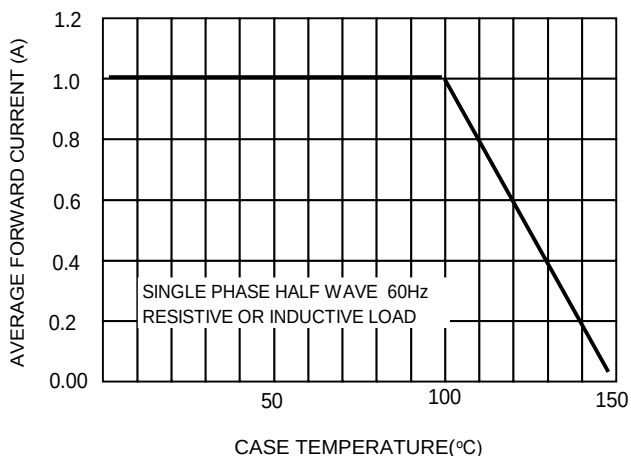


FIG.2 TYPICAL FORWARD CHARACTERISTICS

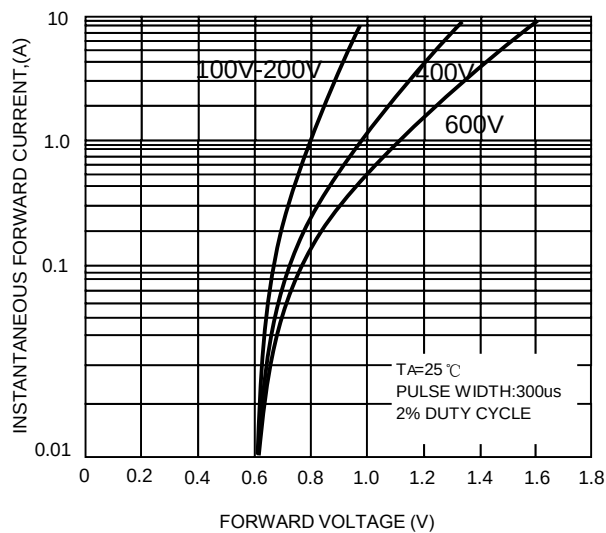


FIG.3 MAXIMUM NON-REPETITIVE


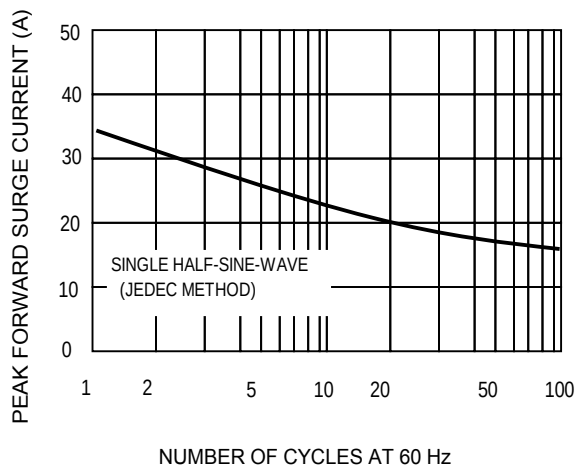


FIG. 4 TYPICAL REVERSE CHARACTERISTICS



ABS PAD LAYOUT

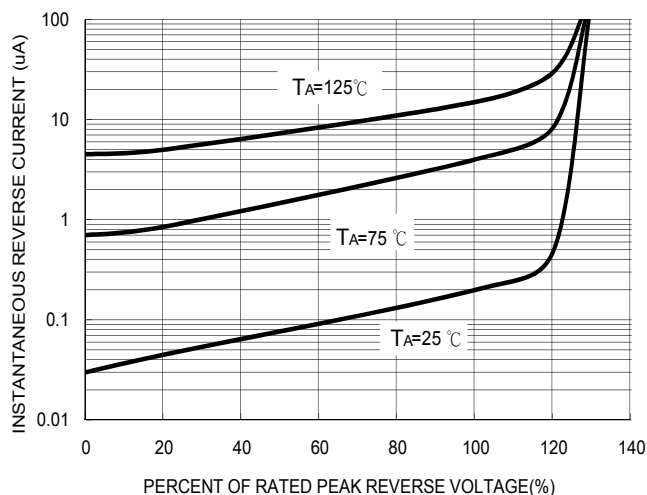