
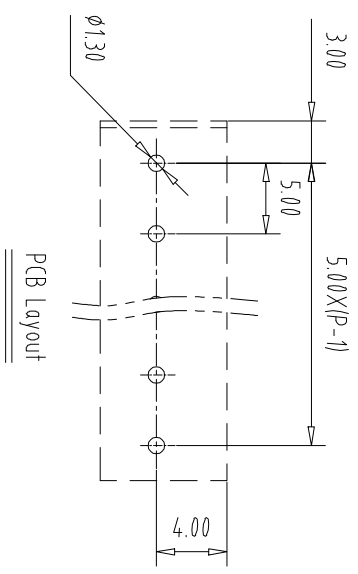

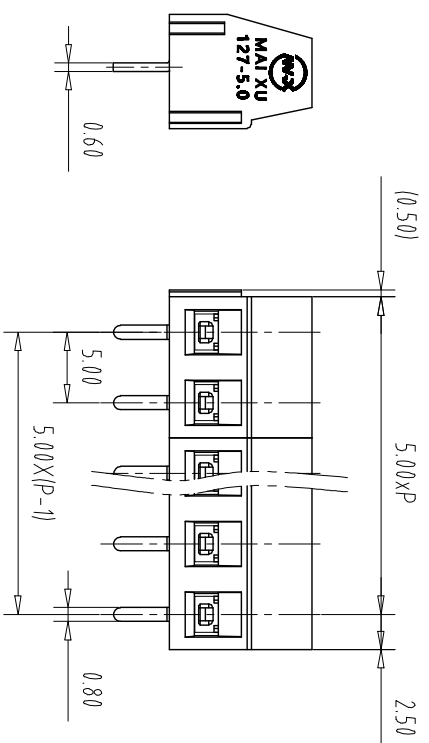


注：本板为禁止传输、复制、编辑文件，以及用其内容进行交流

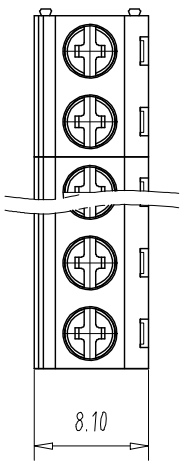

REV	ECN NO.	CONTENT	CHK	DATE

NOTES1:
 UL Standard
 1.Rating voltage/current: 300V//10A
 2.withstanding voltage: AC2000V//1Min
 3.Torque value: M2.5, 3.54Lb/in
 4.Wire range: 26~14AWG
 IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(kV)	/	/	/
Rate Voltage(V)	/	250V	/
Rate Current(A)	/	15A	/

NOTES2:
 1.Housing: PA66(UL94V-0)
 2.Cage: Brass(Ni Plated)
 3.Solder Pin: Copper alloy(Sn Plated)
 4.Screw: Steel(M2.5,Zn Plated)

NOTES3:
 1.Pitch: 5.0mm Poles: 02-24P
 2.Stripping length: 6-7mm
 3.Operating temperature: -40℃~+105℃
 4.RoHS Compliance

How to order
 MX127 - 50 - XXP - XXXX - XX - X - X
 产品型号 间距 颜色 极数
 颜色: GY 灰色:GY 01:军帽颜色
 蓝色:BU 蓝色:BU 02-99:
 黑色:BK 黑色:BK 定制颜色
 透明:GN 透明:TT
 黄色:YW 黄色:YW
 透明:WE 透明:WE
 A-Z其他定制
 0:Y一字螺丝
 1:S十字螺丝
 2:P.S平头十字螺丝
 Cu:铜方块
 Fe:铁方块

Pitch Range In mm	Nominal Dimension In mm	Range	Symbol					
Over 6 TO	Over 10 TO	Over 30 TO	Over 60 TO	Over 100 TO	Over 150 TO	Over 150 TO	0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	MM	SHEET/OF
APP	DATE	SCALE	1:1	A4	1/1
CIXI MAIXU ELECTRONICS CO.,LTD					NAME
MAIXU 慈溪市迈旭电子有限公司					MX127-5.0-XXP
DWGNO.					