
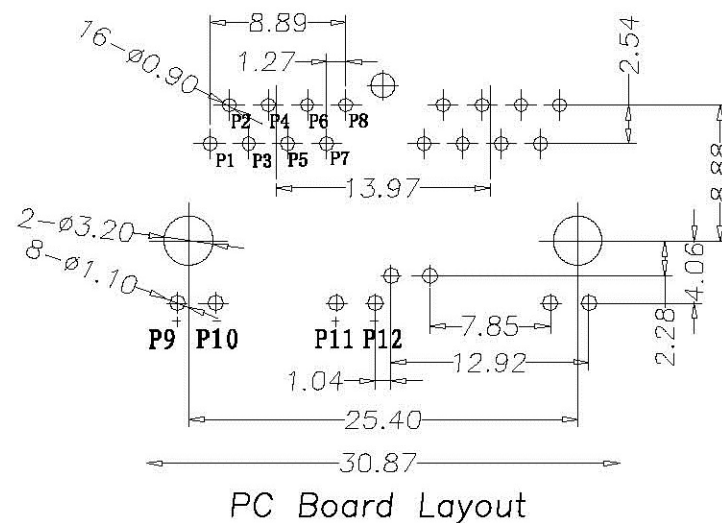
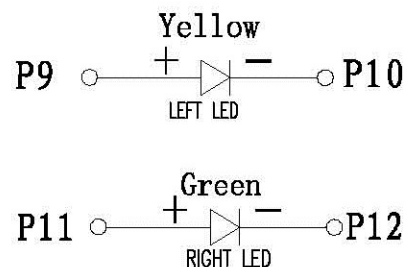
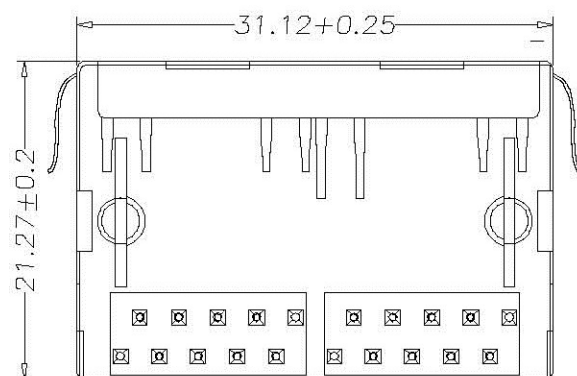


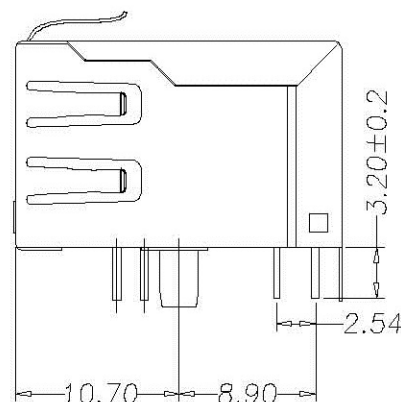

LED Specification

Standard LED Color	LED Wavelength	Forward (V MAX)	Typical (V TYP)	Luminous Intensity
Green	560-580 nm	2.5V	2.1-2.2V	9-25 MCD
Yellow	580-610 nm	2.5V	2.1-2.2V	9-30 MCD

1. LED intensity/wavelength measured with Photo Research PR-650 Colormeter
2. With a forward current of 20 mA, Absolute Maximum Ratings (Ta=25°C)

深圳市连欣科技有限公司

TEL: 0755-33978030 FAX: 0755-32937438

Scale:None Draw : Kal

Units: mm Approved: Ansom

Unless otherwise stated
otherwise tolerances as follows:

1. XXX ± 0.10 . XX ± 0.25 . X ± 0.35
ANG $\pm 3^\circ$

name:	8P8C 1X2 PCB JACK
-------	-------------------

5	Part number:	XDRJ-5903-0236
---	--------------	----------------

Rev: A

Date: 2010/05/08

3 new: 

Page: 1/1

File Name:

E: 工程图

NOTES:

ELECTRICAL:

- | | |
|--------------------------|------------------------------------|
| 1. VOLTAGE RATING | : 125 VAC RMS. |
| 2. CURRENT RATING | : 1.5 AMP. |
| 3. CONTACT RESISTANCE | : 30 MILLIOHMSMAX |
| 4. INSULATION RESISTANCE | : 500 MEGOHMS MIN @ 500 NDC. |
| 5. DIELECTRIC STRENGTH | : 1000 VAC RMS 50Hz or 60Hz, 1MIN. |

MECHANICAL:

1. HOUSING & INSERT MATERIAL : PBT UL94V-0.
2. CONTACT MATERIAL : DIAMETER 0.45MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
3. SHIELD : 0.20~0.25MM THICKNESS BRASS WITH NI PLATED.
4. MATING/UNMATING FORCE : 2.2KG.F MAX.
5. RETENTION STRENGTH : 7.7KG.F MIN BETWEEN JACK AND PLUG.
6. OPERATING LIFE : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE : -45°C ~+80°C REATIVE HUMIDITY<70%
2. OPERATION : -45°C ~+80°C

