

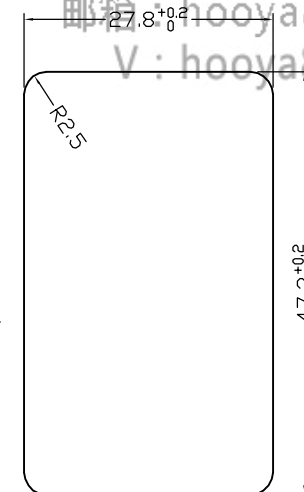
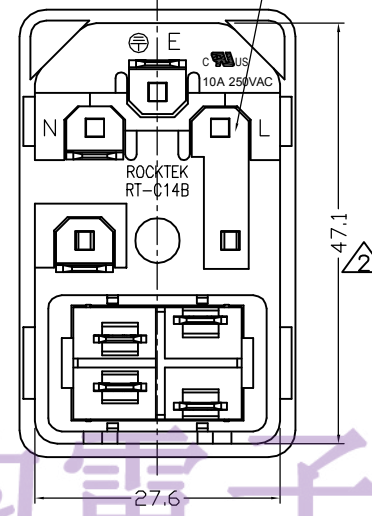
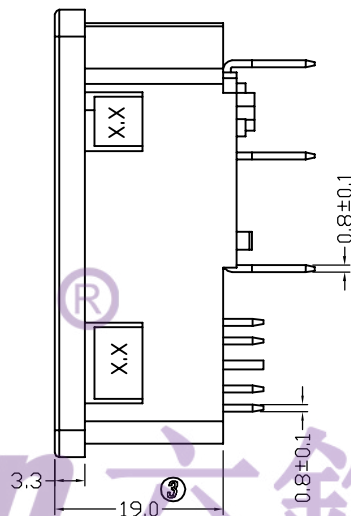


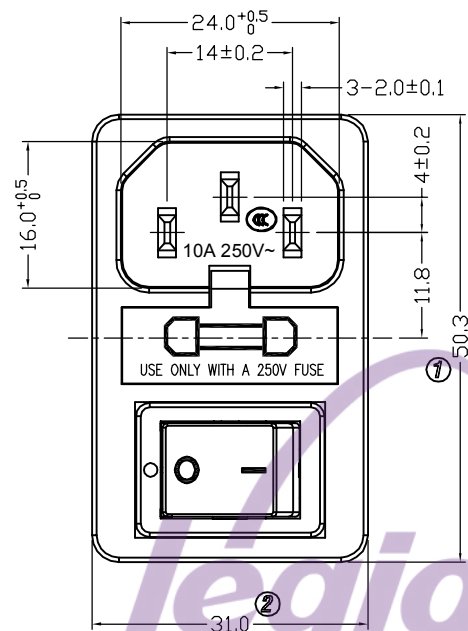

PANEL CUT-OUT

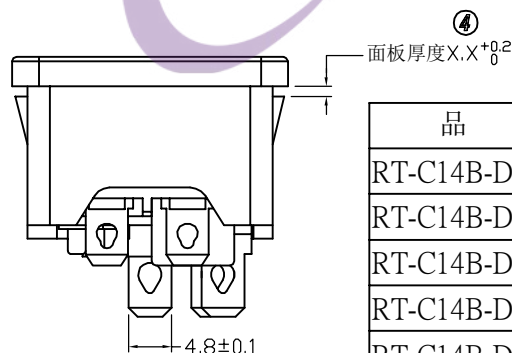

品 名	X. X
RT-C14B-D1+SS21-1BB	0.8mm
RT-C14B-D2+SS21-1BB	1.0mm
RT-C14B-D3+SS21-1BB	1.5mm
RT-C14B-D4+SS21-1BB	2.0mm
RT-C14B-D5+SS21-1BB	3.0mm
RT-C14B-D6+SS21-1BB	1.2mm

Socket : RT-C14B-D**-13-R

1.Rating : 10A 250VAC (CCC ; UL ; CUL)

2.Insulation resistance : >100MΩ Min 500VDC

3.Withstand voltage : >2000VAC 0.5mA 1 minute

Switch : SS21-BBIWG-R

1.Rating : 10A 125/250VAC (UL ; CUL)

12(4)A 250V~ (ENEC17 ; NEMKO ; CQC ; KC)

2.Contact resistance : <50mΩ

3.Insulation resistance : >100MΩ Min 500VDC

4.Dielectric strength : >1500VAC 0.5mA 1 minute

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM		
4	→	9	→	RANGE	TOLERANCE				LMC 2019.05.20	SCALE	NO		
3	→	8	→	X	±0.30					MAT'L	***		
2	47.3 → 47.1 20.12.17	7	→	X.X	±0.20					MATERIAL NO.		DRAWING NO.	REV.
1	增加1.2面板厚度 20200330	6	→	X.XX	±0.10	LEGION ELECTRONIC & HARDWARE CO., LTD.				RT-C14B-D*+SS21-1BB		WIF119053	A2
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1°								