


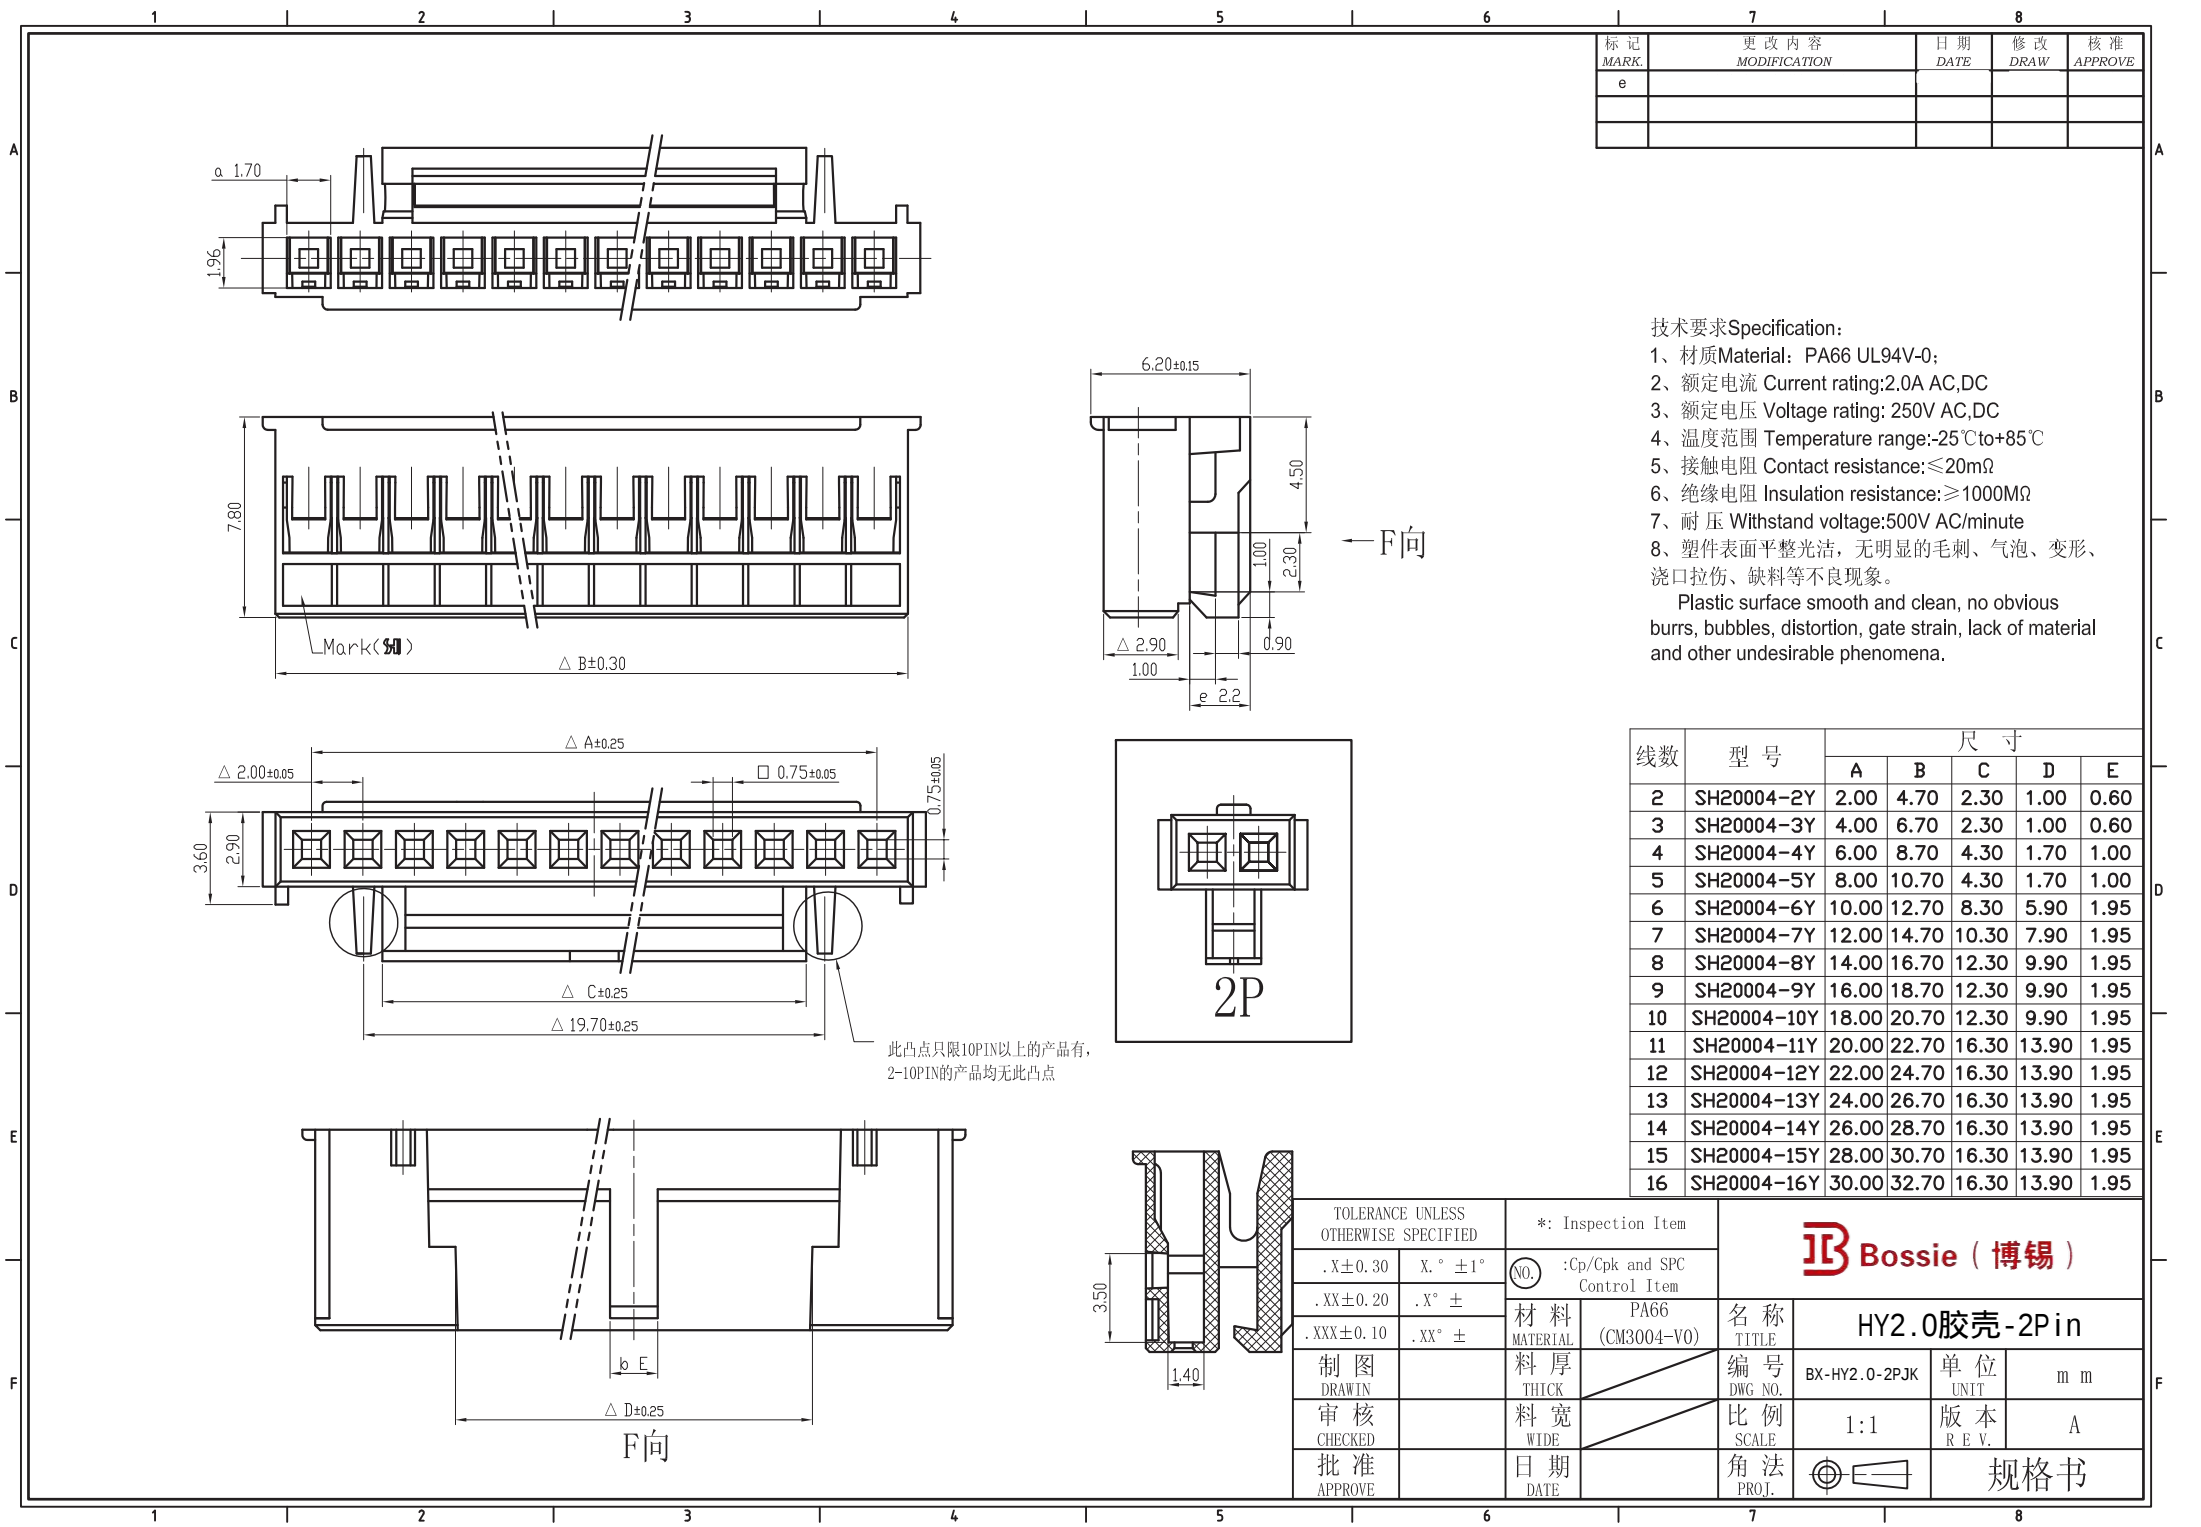

| 标记<br>MARK. | 更改内容<br>MODIFICATION | 日期<br>DATE | 修改<br>DRAW | 核准<br>APPROVE |
|-------------|----------------------|------------|------------|---------------|
| e           |                      |            |            |               |
|             |                      |            |            |               |
|             |                      |            |            |               |

技术要求Specification:  
1、材质Material: PA66 UL94V-0;  
2、额定电流 Current rating:2.0A AC,DC  
3、额定电压 Voltage rating: 250V AC,DC  
4、温度范围 Temperature range:-25℃to+85℃  
5、接触电阻 Contact resistance:≤20mΩ  
6、绝缘电阻 Insulation resistance:≥1000MΩ  
7、耐 压 Withstand voltage:500V AC/minute  
8、塑件表面平整光洁, 无明显的毛刺、气泡、变形、浇口拉伤、缺料等不良现象。  
Plastic surface smooth and clean, no obvious burrs, bubbles, distortion, gate strain, lack of material and other undesirable phenomena.

| 线数 | 型 号         | 尺 寸   |       |       |       |      |
|----|-------------|-------|-------|-------|-------|------|
|    |             | A     | B     | C     | D     | E    |
| 2  | SH20004-2Y  | 2.00  | 4.70  | 2.30  | 1.00  | 0.60 |
| 3  | SH20004-3Y  | 4.00  | 6.70  | 2.30  | 1.00  | 0.60 |
| 4  | SH20004-4Y  | 6.00  | 8.70  | 4.30  | 1.70  | 1.00 |
| 5  | SH20004-5Y  | 8.00  | 10.70 | 4.30  | 1.70  | 1.00 |
| 6  | SH20004-6Y  | 10.00 | 12.70 | 8.30  | 5.90  | 1.95 |
| 7  | SH20004-7Y  | 12.00 | 14.70 | 10.30 | 7.90  | 1.95 |
| 8  | SH20004-8Y  | 14.00 | 16.70 | 12.30 | 9.90  | 1.95 |
| 9  | SH20004-9Y  | 16.00 | 18.70 | 12.30 | 9.90  | 1.95 |
| 10 | SH20004-10Y | 18.00 | 20.70 | 12.30 | 9.90  | 1.95 |
| 11 | SH20004-11Y | 20.00 | 22.70 | 16.30 | 13.90 | 1.95 |
| 12 | SH20004-12Y | 22.00 | 24.70 | 16.30 | 13.90 | 1.95 |
| 13 | SH20004-13Y | 24.00 | 26.70 | 16.30 | 13.90 | 1.95 |
| 14 | SH20004-14Y | 26.00 | 28.70 | 16.30 | 13.90 | 1.95 |
| 15 | SH20004-15Y | 28.00 | 30.70 | 16.30 | 13.90 | 1.95 |
| 16 | SH20004-16Y | 30.00 | 32.70 | 16.30 | 13.90 | 1.95 |

| TOLERANCE UNLESS OTHERWISE SPECIFIED |           | *: Inspection Item |                              | Bossie ( 博锡 ) |               |       |
|--------------------------------------|-----------|--------------------|------------------------------|---------------|---------------|-------|
| . X ± 0.30                           | X. ° ± 1° | NO.                | :Cp/Cpk and SPC Control Item |               |               |       |
| . XX ± 0.20                          | . X° ±    | 材 料                | PA66                         | 名 称           | HY2.0胶壳-2Pin  |       |
| . XXX ± 0.10                         | . XX° ±   | MATERIAL           | (CM3004-V0)                  | TITLE         |               |       |
| 制 图                                  |           | 料 厚                |                              | 编 号           | BX-HY2.0-2PJk | 单 位   |
| DRAWIN                               |           | THICK              |                              | DWG NO.       |               | UNIT  |
| 审 核                                  |           | 料 宽                |                              | 比 例           | 1:1           | 版 本   |
| CHECKED                              |           | WIDE               |                              | SCALE         |               | RE V. |
| 批 准                                  |           | 日 期                |                              | 角 法           | 规格书           |       |
| APPROVE                              |           | DATE               |                              | PROJ.         |               |       |