

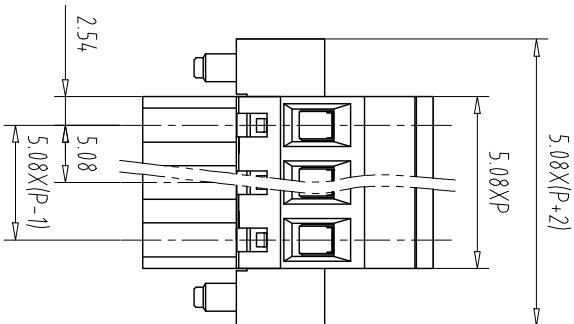
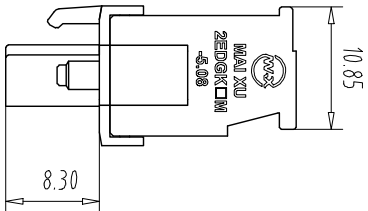


注： 本板为禁止转售、复制、翻印或仿造，以及用其内容进行交流

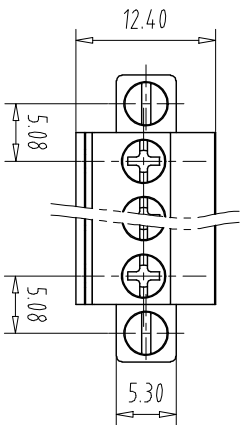

Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

3. Torque value: M2.5, 3.54Lb/in
4. Wire range: 28~12AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	4.0KV	/
Rate Voltage(V)	/	320V	/
Rate Current(A)	/	12A	/

2. Torque value: M2.5, 0.4Nm
3 wire range: 10~2.5mm²

NOTES2:

- 1.Housing: PA66 (UL94V-0)
2.Cover: PA66 (UL94V-0)
3.Cage: Brass (Ni Plated)
4.Clamp: Copper alloy (Ni Plated)
5.Screw: Steel (M2.5,Zn Plated)

NOTES3:

- 1.Pitch: 5.08mm Poles: 02-24P
2.Stripping length: 7-8mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

How to order

MX2EDGKBM - 508 - XXP - XXXX - XX - X - X

产品型号 间距 颜色 板数 A-Z其他定制
灰色:GY 棕色:OE 01:带颜色
蓝色:BU 红色:RD 02-99:
黑色:BK 透明色:TT 定制颜色
绿色:GN 黄色:YW
透明色:TT 白色:WE

Cu:铜方块
Fe:铁方块
0-Y一字螺丝
1-S十字螺丝
2-P S平头十字螺丝

Pitch Range In mm	Nominal Dimension Range In mm	—	□
Over 6 TO 10	Over 30 TO 60	Over 100 TO 150	0.1/10
Over 10 TO 24	Over 60 TO 100	Over 150 TO 150	≤
±0.15 ±0.20 ±0.30 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30	±0.15 ±0.20 ±0.30 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30	±2°	

REV	ECN NO.	CONTENT	CHK	DATE
-----	---------	---------	-----	------

NOTES1:

UL Standard

1.

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHK	DATE	22.09.14	UNITS	MM
CHK	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	MX2EDGKBM-5.08-XXP		
CIXI MAIXU ELECTRONICS CO.,LTD MAIXU 慈溪市迈旭电子有限公司					
				DWGNO.	