
THROUGH-HOLE MICRO HEADER

(1.27 mm) .050" PITCH • FTSH SERIES

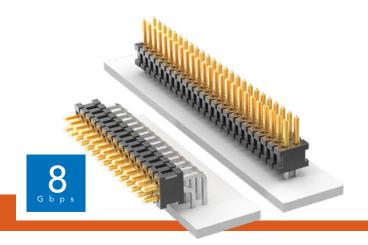

FTSH Board Mates:

CLP, FLE

Cable Mates: FFSD, FFTP

SPECIFICATIONS

Insulator Material: Black Liquid Crystal Polymer
Terminal Material: Phosphor Bronze Plating: Sn or Au over 50 µ" (1.27 µm) Ni Current Rating (FTSH/CLP): 3.4 A per pin (2 pins powered) Operating Temp Range: -55 °C to +125 °C

PROCESSING

Lead-Free Solderable:

LOCKING CLIP

For single mating cycle with the FFSD. PC BOARD □ Specify -LC after tail option. Lead Style -01 and 10 pins/row minimum. 5-9 pins/row not available in combination with keying

ALSO AVAILABLE MOQ Required

Molded Pick & Place pads Other platings

shroud (-K).



Some sizes, styles and options are non-standard, non-returnable.

See SFM/TFM for positive alignment feature.



PER ROW

02

thru

50

STYLE

Specify

LEAD

STYLE

from

chart



= Gold flash

on post,

Matte Tin

on tail

-L

= 10 µ"

(0.25 µm) Gold on

post, Matte Tin

on tail

Leave blank for Right-angle

OPTION

(Specify position with -EX options) Leave

TAIL

OPTION

-"XXX" = Polarized Position of omitted pin) (Not available blank for straight tail

-RA = Right-angle

-ES = End Shroud (Style -02 & -03) 9 pins/row minimum

OPTIONS

-EP

End Shroud with Guide Post (Style –02 & –03) 9 pins/row minimum


-EL = End Shroud with Board Lock (Style -02 & -03) 9 pins/row

–EJ = Ejector Shroud (Style –01 only) 10 pins/row minimum 25 pins/row maximum -RA

not available


-K = Keying Shroud for mating with FFSD With FFSD (Style –01 only, 05, 08, 10, 13, 15, 17, 20 & 25 pins/row only and 13, 17, 20 & 25 only with -EJ option)

OPTION	Z
-ES	(1.55) .061
–EJ	(15.77) .621
-EP	(5.87) .231
–EL	((6.53) .257



No. of positions x (1.27) .050 + Z→

-EX OPTION SHOWN



-RA-ES

Ш


-ES




LEAD STYLE	A	MATES WITH
-01	(3.05) .120	FFSD
-02	(1.91) .075	FLE
-03	(1.65) .065	CLP-D
-04	(3.81)	N/A









-EP

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

FTSH-110-01-L-DV-K-P-TR FTSH-105-01-L-DV FTSH-120-01-F-DV-K FTSH-105-01-L-DV-K FTSH-120-01-L-DV-K FTSH-113-01-F-D-K FTSH-108-01-F-DV-K FTSH-105-01-F-DV-K FTSH-117-01-F-DV-K FTSH-110-01-L-D-K FTSH-113-01-L-D-K FTSH-105-01-L-D-K FTSH-105-01-L-DV-K-P-TR FTSH-120-01-F-DV-K-P-TR FTSH-107-01-L-DV FTSH-120-04-L-D-RA FTSH-105-01-L-D FTSH-113-01-L-DV-K FTSH-117-01-L-DV-K-A-P-TR FTSH-120-01-L-DV FTSH-105-01-F-D-K FTSH-110-01-L-D FTSH-105-01-F-DV-K-P-TR FTSH-103-01-F-DV-TR FTSH-110-01-L-DV FTSH-120-01-L-DV-K-P-TR FTSH-125-01-L-DV FTSH-105-01-L-DV-P-TR FTSH-106-01-L-DV-P-TR FTSH-113-01-L-DV-A-P-TR FTSH-105-01-F-DV FTSH-108-01-L-DH-A FTSH-108-01-F-DV-K-P-TR FTSH-105-01-L-DH-A FTSH-108-01-L-DV FTSH-110-01-L-DV-K FTSH-110-01-F-DV-K FTSH-105-01-L-DV-TR FTSH-106-01-F-DV-K-P-TR FTSH-108-01-L-DV-P-TR FTSH-110-01-F-DV FTSH-105-01-L-DV-K-A-P FTSH-105-01-L-DH FTSH-120-01-F-DV FTSH-113-01-F-DV-K FTSH-110-01-F-DV-P FTSH-105-01-L-DV-K-TR FTSH-105-01-F-DV-A-P-TR FTSH-108-01-L-DV-K FTSH-117-01-L-DV-K FTSH-108-01-L-DV-A-P-TR FTSH-105-01-L-D-RA-K FTSH-105-01-L-DV-A FTSH-105-04-F-DV FTSH-120-01-L-MT FTSH-110-04-L-DH-A FTSH-113-01-F-DV FTSH-130-01-L-D FTSH-125-04-L-D-RA FTSH-102-03-F-DV FTSH-105-01-F-DH-C-TR FTSH-105-01-F-D FTSH-105-01-F-DV-007-K FTSH-102-01-L-DV-TR FTSH-105-01-F-DV-K-A-P FTSH-107-01-F-MT FTSH-110-01-L-DH FTSH-106-01-L-D FTSH-110-01-L-D-EJ FTSH-113-04-L-D-RA FTSH-118-01-L-MT FTSH-120-03-F-D FTSH-105-02-L-DV-P-TR FTSH-110-02-L-D-RA FTSH-150-04-L-DV FTSH-111-01-L-D FTSH-113-01-L-DV FTSH-118-01-F-D FTSH-120-03-F-DV FTSH-118-02-F-D-RA FTSH-118-04-L-D FTSH-140-04-L-DV FTSH-140-02-L-DV-ES-A FTSH-104-01-L-DV-TR FTSH-104-01-S-D FTSH-104-03-F-DV FTSH-105-01-F-MT FTSH-104-03-F-D FTSH-105-01-L-DV-A-P-TR FTSH-105-04-L-DH-A FTSH-108-01-F-DV-K-A FTSH-117-01-L-DV FTSH-106-01-L-D-RA FTSH-108-01-L-DV-K-P-TR FTSH-113-01-F-D-RA FTSH-123-01-L-D FTSH-139-01-L-D-RA FTSH-105-04-L-DV-A FTSH-106-01-F-D-K FTSH-107-01-F-DV-K