
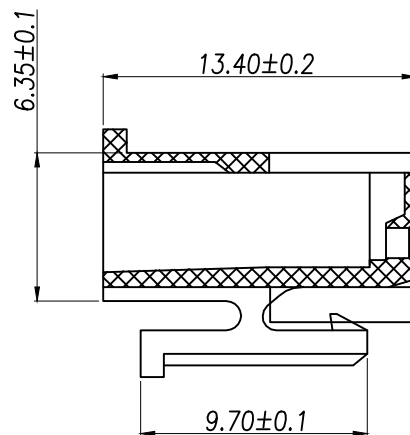


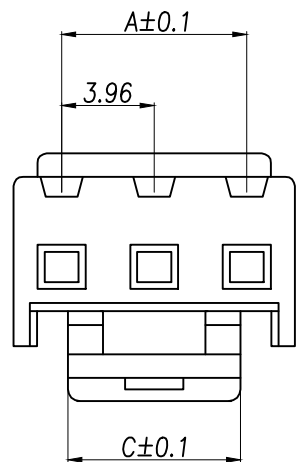


Part No	Pin	A	B	C
XY-VH3.96-2A41	2	3.96	8.20	3.55
XY-VH3.96-3A41	3	7.92	12.10	7.40
XY-VH3.96-4A41	4	11.88	16.06	7.40
XY-VH3.96-5A41	5	15.84	20.02	7.40
XY-VH3.96-6A41	6	19.80	23.98	7.40
XY-VH3.96-7A41	7	23.76	27.94	7.40
XY-VH3.96-8A41	8	27.72	31.90	7.40
XY-VH3.96-9A41	9	31.68	35.86	7.40
XY-VH3.96-10A41	10	35.64	39.82	7.40
XY-VH3.96-11A41	11	39.60	43.78	7.40
XY-VH3.96-12A41	12	43.56	47.74	7.40

技术要求Specification:

1. 材质Material: PA66 UL94V-2(0);
2. 额定电流 Current rating:3.0A AC,DC
3. 额定电压 Voltage rating:250V AC,DC
4. 温度范围 Temperature range:-25℃to+85℃
5. 接触电阻 Contact resistance:≤0.02Ω
6. 绝缘电阻Insulation resistance:≥1000MΩ
7. 耐压Withstand voltage:1000V AC/minute
8. 塑件表面平整光洁, 无明显的毛刺、气泡、变形、浇口拉伤、缺料等不良现象。

Plastic surface smooth and clean, no obvious glitches, bubbles, distortion, gate strain, lack of material and other undesirable phenomena.

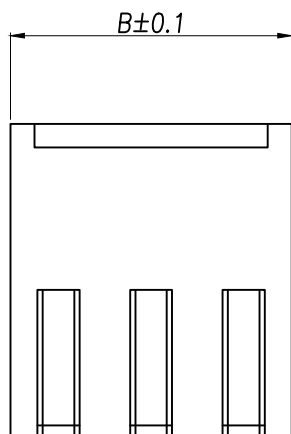

DIMENSION IN mm		厦门市辛译精密电子有限公司			
TOLERANCE UNLESS OTHERWISE SPECIFIED		Xiamen XinYi Xyeconn Electronics Co.,Ltd			
.X±0.50	X.*± 5°	APR. Alex	DWG NO. XY-VH3.96-NA41		
.XX±0.20	.X*± 3°	CHK. Jack			
.XXX±0.10	.XX*± 1°	DRA. Can	PROJ. 	CUSTOMER DRAWING	
			SIZE A4	SCALE 1:1	SHEET 1/3