


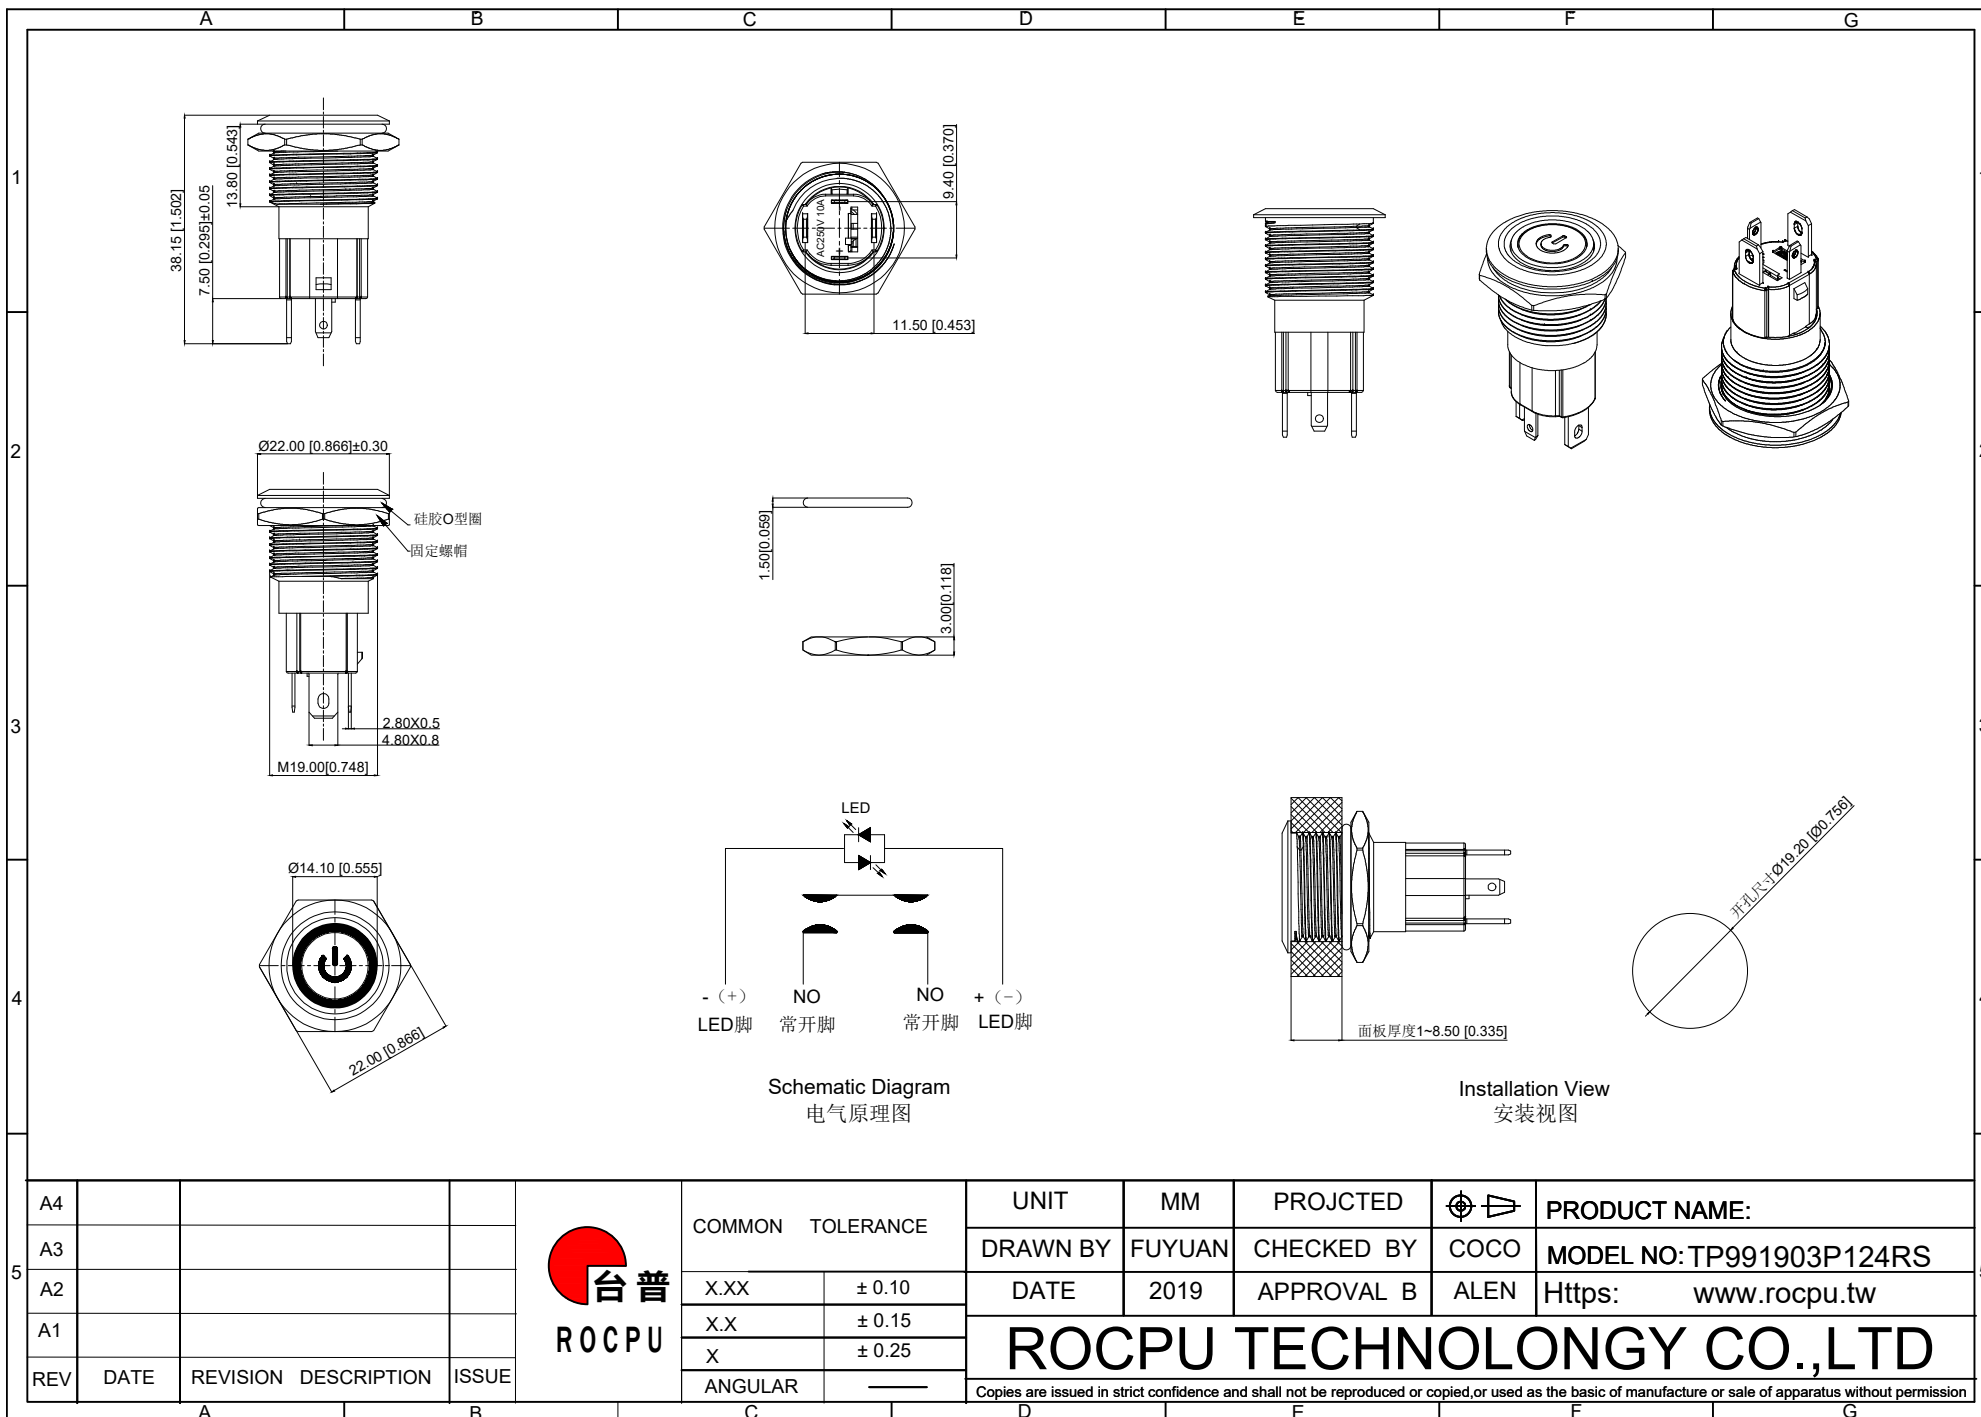

	A	B	C	D	E	F	G				
1	性能参数				12. Explosion prevention level: IK10 防暴等级: IK10						
	1. Heating current: Ui: AC250V, Ith: 10A 发热电流: Ui: AC250V, Ith: 10A				13. Working environment temperature: -40 ℃~+80 ℃ 工作环境温度: -40 ℃~+80 ℃						
	2. Rated current:10A,AC110V/220V 10A,DC12V/24V 额定电流:10A,AC110V220V 10A,DC12V/24V				14. Compression torque: ≤ 5.0N 按压扭力: ≤5.0N						
	3. Power-frequency withstand voltage:1500V/1min 工频耐压:1500V/1min				15. Electrical life: 50,000 cycles 电气寿命: 50,000 cycles						
	4. Insulation resistance:≥1000MΩ 绝缘电阻 :≥1000MΩ				16. Mechanical: 500, 000cycles 机械寿命: 500,000cycles						
2	5. Contact resistance:≤50mΩ 接触电阻 :≤50mΩ				17. Operation method:self-locking 操作方式: 自锁式						
	6. Pressing stroke:4.00mm ± 0.10 按压行程:4.00mm ± 0.10				18. LED lamp power consumption: 20mA以下 LED灯功耗: 20mA以下						
	7. Contact stroke:1.20mm±0.10 接触行程 :1.20mm±0.10				19. LED lamp lifespan: 40000h LED寿命: 40000h						
	8. welding temperature: 320 ℃± 20 ℃ 焊接温度: 320 ℃± 20 ℃				20. LED color: Red LED颜色: 红色						
	9. Welding duration: Less than 3 seconds in duration 焊接时长: Less than 3 seconds in duration				21. LED Lamp Voltage: 24V LED灯电压: 24V						
	10. Nut assembly torque:5-14N.m 螺帽装配力矩:5-14N.m				22. NO reverse thrust foot torque: ≤30N NO反推脚扭力: ≤30N						
3	11. Protection level:IP67 防护等级:IP67										
	连接形式										
	1. Welding temperature of wire: 320 ± 20 ℃ 线材焊接温度: 320±20℃ Wire welding duration: less than 3 seconds 线材焊接时长: 时长3秒以下										
	2. Can be used with dedicated connectors: 可配专用接插件使用:										
	2.1 Switch function wire: Blue wire (NO) (1.0²mm) 开关功能线材: 蓝线 (NO) (1.0²mm)										
	2.2 LED functional wire: red wire positive pole black wire negative pole(0.5²mm) LED功能线材: 红线正极 黑线负极(0.5²mm)										
	2.3 LED is an electrodeless lamp bead that can be lit without the need to separate positive and negative poles LED为无极灯珠, 无需分正负极也可点亮										
5	A4				COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
	A3						DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP991903P124RS
	A2				X.XX ± 0.10		DATE	2019	APPROVAL B	ALEN	Https: www.rocpu.tw
	A1				X.X ± 0.15		ROC PU TECHNOLOGY CO.,LTD				
	REV	DATE	REVISION DESCRIPTION		ISSUE	X ± 0.25					
					ANGULAR	Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission					
	A	B	C	D	E	F	G				

A		B		C		D		E		F		G	
材质参数													
9	luminous zone 发光区			PC 塑胶		1							
8	LEDpin LED引脚			Brass 黄铜		1		Silvering 镀银					
7	Base 底座			PBT		1							
6	NOPin NO引脚			Brass 黄铜		1		gold-plating 镀金					
5	Contact material 接触材质			silver alloy 银合金		1							
4	Arm nut 固定螺帽			Brass 黄铜		1		nickeling 镀镍					
3	Oring O型圈			Silica gel 硅胶		1							
2	Housing 外壳			SUS 不锈钢		1							
1	Key 按键			SUS 不锈钢		1							
NO 序号	Part name 部件名			Material 材料		QTY 数量		Remark 备注					

A4				 台普 ROC PU	COMMON TOLERANCE		UNIT	MM	PROJCTED		PRODUCT NAME:	
A3					X.XX	± 0.10	DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP991903P124RS	
A2					X.X	± 0.15	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw	
A1					X	± 0.25	ROC PU TECHNOLOGY CO.,LTD					
REV	DATE	REVISION	DESCRIPTION		ISSUE	ANGULAR						