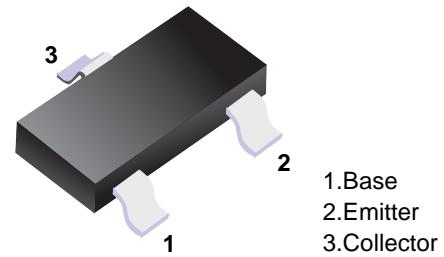
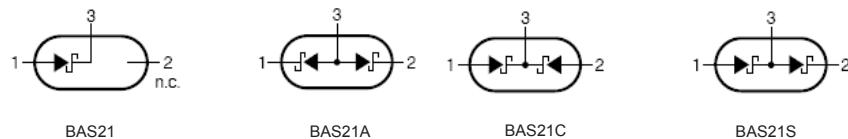


Switching Diodes**■ Features**

- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- High Conductance
- For General Purpose Switching Applications

**■ Simplified outline(SOT-23)****■ Absolute Maximum Ratings Ta = 25°C**

Parameter	Symbol	Rating	Unit
Reverse Voltage	V _R	250	V
Forward Current	I _F	200	mA
Power Dissipation	P _D	200	mW
Operating Junction Temperature Range	T _J	-55 to +150	°C
Storage Temperature Range	T _{stg}	-55 to +150	°C


■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Reverse Breakdown Voltage	V _(BR)	I _R =100 μA	250			V
Forward Voltage	V _F	I _F =100mA I _F =200mA			1.0 1.25	V
Reverse Leakage	I _R	V _R =200V			100	nA
Junction Capacitance	C _j	V _R =0V, f=1.0MHz			5.0	pF
Reverse Recover Time	T _{rr}				50	nS

■ Marking


NO.	BAS21	BAS21A	BAS21C	BAS21S
Marking	JS	JS2	JS3	JS4

■ Typical Characteristics

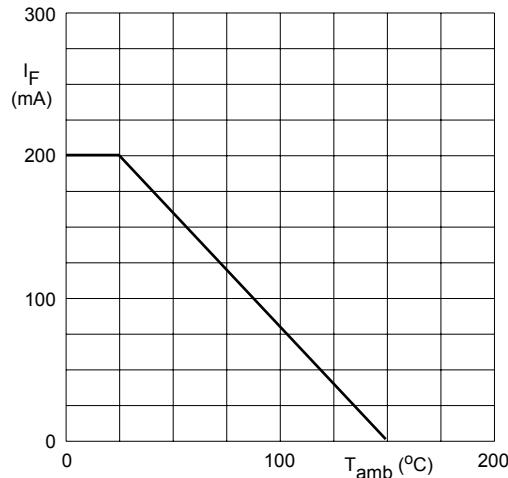


Device mounted on an FR4 printed-circuit board.

Fig.1 Maximum permissible continuous forward current as a function of ambient temperature.

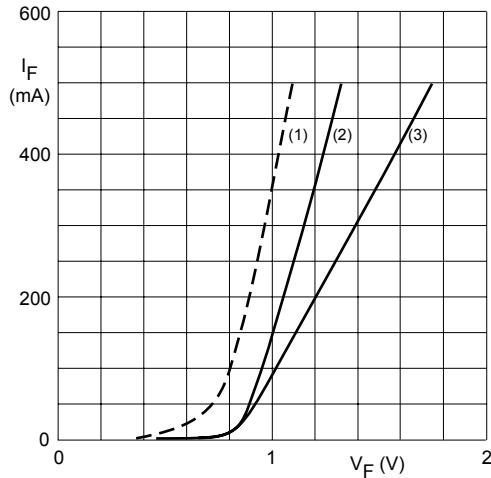

- (1) $T_j = 150 \text{ } ^\circ\text{C}$; typical values.
- (2) $T_j = 25 \text{ } ^\circ\text{C}$; typical values.
- (3) $T_j = 25 \text{ } ^\circ\text{C}$; maximum values.

Fig.2 Forward current as a function of forward voltage.

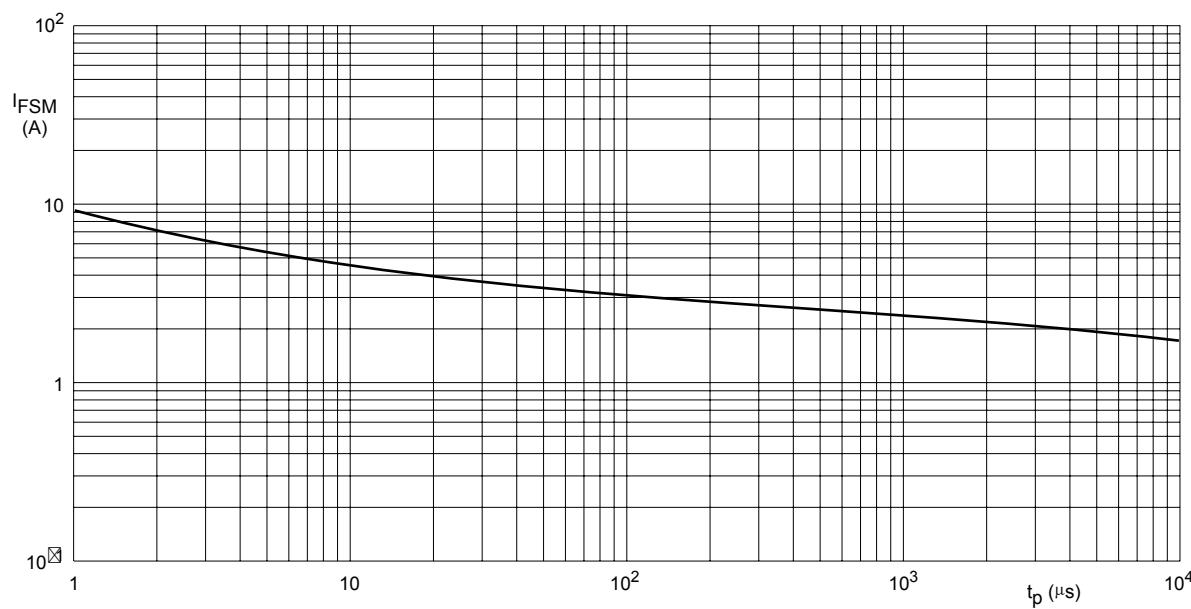


Based on square wave currents.

$T_j = 25 \text{ } ^\circ\text{C}$ prior to surge.

Fig.3 Maximum permissible non-repetitive peak forward current as a function of pulse duration.


■ Typical Characteristics

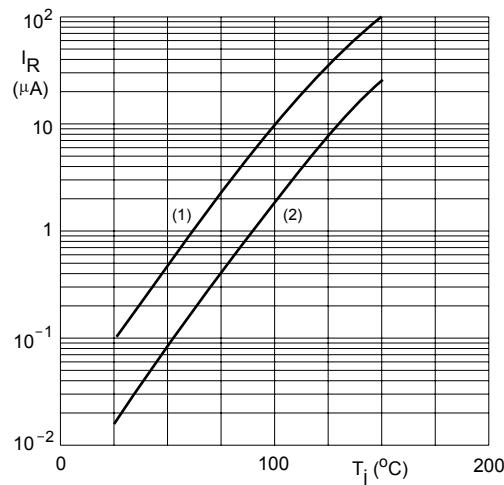

(1) $V_R = V_{R\max}$; maximum values.

(2) $V_R = V_{R\max}$; typical values.

Fig.5 Reverse current as a function of junction temperature.

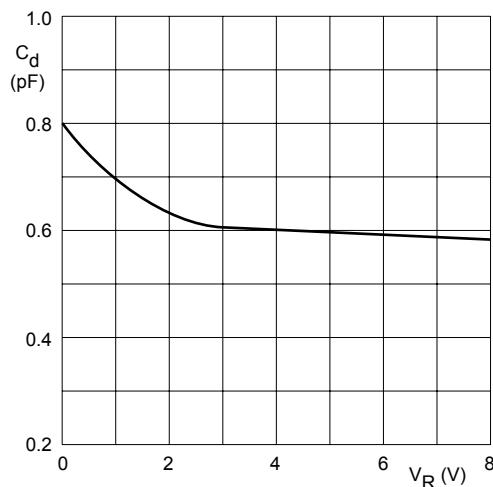

f = 1 MHz; T_j = 25 °C.

Fig.6 Diode capacitance as a function of reverse voltage; typical values.


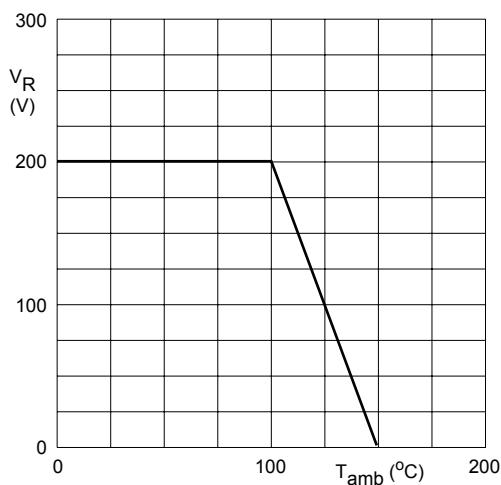


Fig.7 Maximum permissible continuous reverse voltage as a function of the ambient temperature.

■ SOT-23

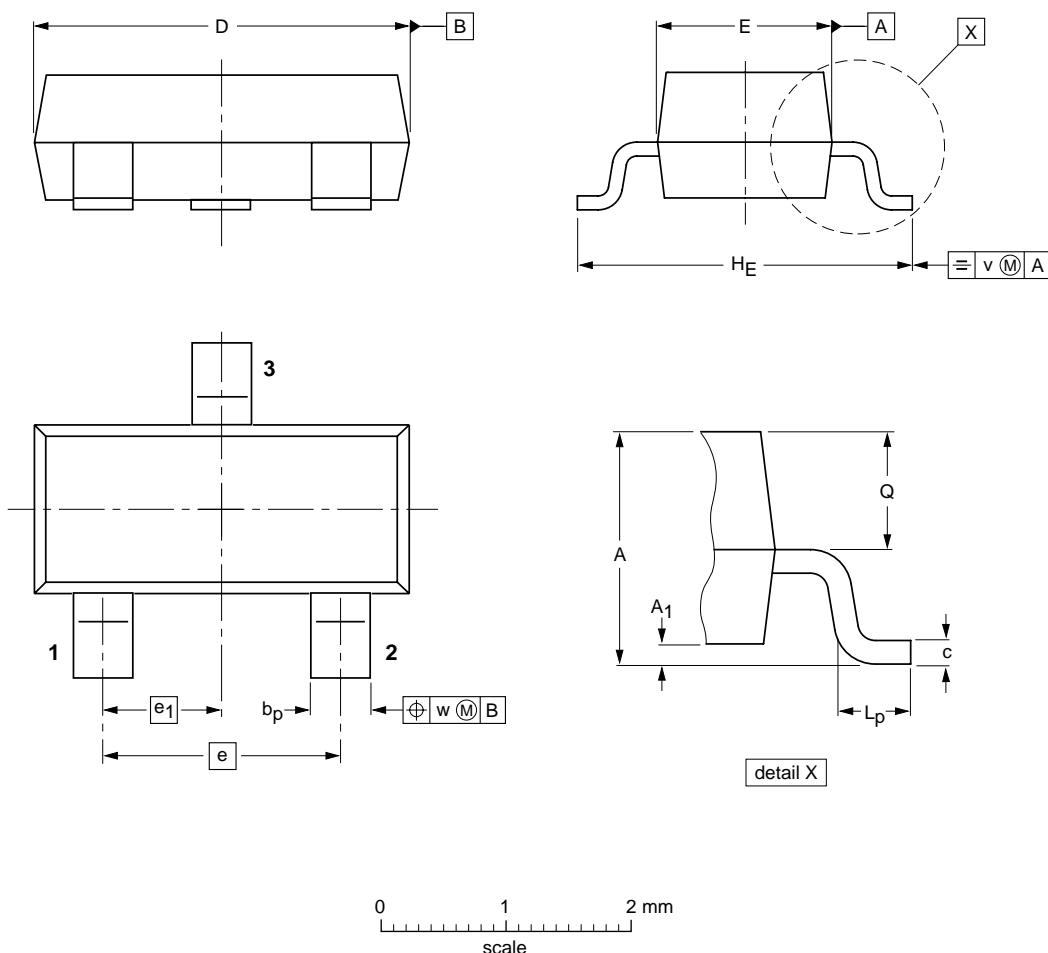

DIMENSIONS (mm are the original dimensions)

UNIT	A	A_1 max.	b_p	c	D	E	e	e_1	H_E	L_p	Q	v	w
mm	1.1 0.9	0.1	0.48 0.38	0.15 0.09	3.0 2.8	1.4 1.2	1.9	0.95	2.5 2.1	0.45 0.15	0.55 0.45	0.2	0.1