


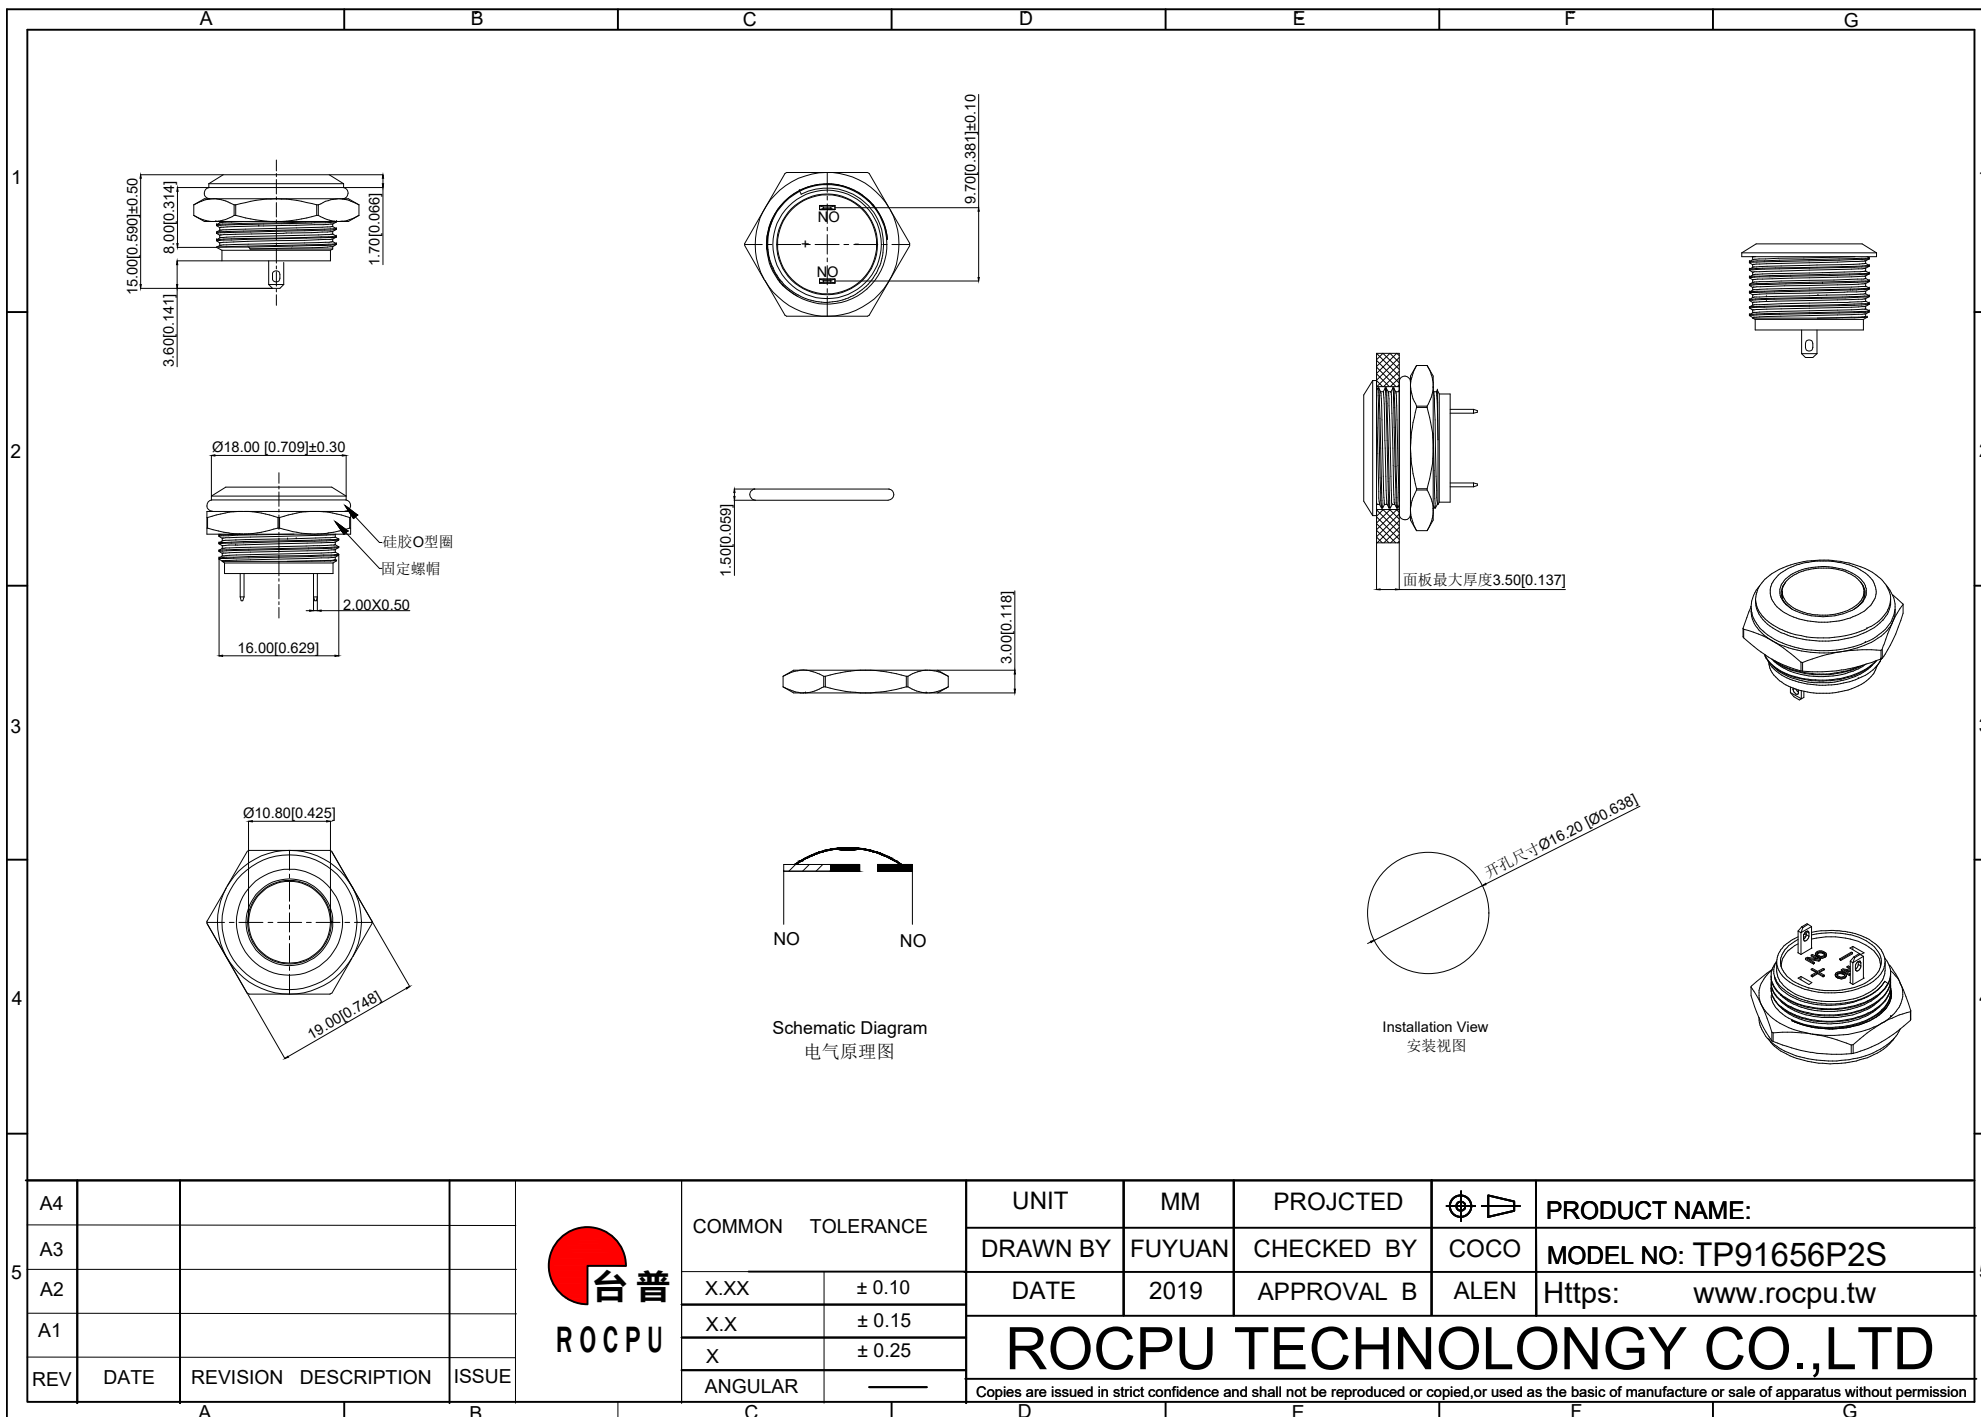

A4					 台普 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3								DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP91656P2S
A2								DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
A1								ROCPCU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION	DESCRIPTION	ISSUE		ANGULAR		Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basis of manufacture or sale of apparatus without permission				

	A		B		C		D		E		F		G	
1	性能参数													
	1. Heating current: Ui: AC250V, Ith: 50mA 发热电流: Ui: AC250V, Ith: 50mA						13. Working environment temperature: -20 ℃~+55 ℃ 工作环境温度: -20 ℃~+55 ℃							
	2. Rated current:0.1A/DC36V 额定电流:0.1A/DC36V						14. Compression torque: ≤ 3N 按压扭力: ≤3N							
	3. Power-frequency withstand voltage:2000V1min 工频耐压:2000V1min						15. Electrical life: 200000 cycles 电气寿命: 200000 cycles							
	4. Insulation resistance:≥1000MΩ 绝缘电阻 :≥1000MΩ						16. mechanical: 1000000cycles 机械寿命: 1000000cycles							
	5. Contact resistance:≤50mΩ 接触电阻 :≤50mΩ						17. Operation method:Self repeating form 操作方式: 自复式							
	6. Pressing stroke:0.50mm ± 0.10 按压行程:0.50mm ± 0.10						18. NO reverse thrust foot torque: ≤30N NO反推脚扭力: ≤30N							
	7. Contact stroke:0.50mm±0.10 接触行程 :0.50mm±0.10													
	8. welding temperature: 320 ℃± 20 ℃ 焊接温度: 320 ℃± 20 ℃													
	9. Welding duration: Less than 3 seconds in duration 焊接时长: Less than 3 seconds in duration													
	10. Nut assembly torque:5-14N 螺帽装配力矩:5-14N													
	11. Protection level:IP67 防护等级:IP67													
2	12. Explosion prevention level: IK08 防暴等级: IK08													
	3													
4														
	5	A4				 台普 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:	
A3					DRAWN BY				FUYUAN	CHECKED BY	COCO	MODEL NO: TP91656P2S		
A2							DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw			
A1					ROCPCU TECHNOLOGY CO.,LTD									
REV		DATE	REVISION	DESCRIPTION								ISSUE	ANGULAR	Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission
A		B		C		D		E		F		G		

A					B					C					D					E					F					G				
材质参数																																		
6					Pin 引脚					Brass 黄铜					1					gold-plating 镀金														
5					Base 基座					PBT					1																			
4					Arm nut 固定螺帽					Brass 黄铜					1					nickeling 镀镍														
3					Oring O型圈					Silica gel 硅胶					1																			
2					Housing 外壳					SUS 不锈钢					1																			
1					Key 按键					SUS 不锈钢					1																			
NO 序号					Part name 部件名					Material 材料					QTY 数量					Remark 备注														

A4				 台普 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:																							
A3					X.XX	± 0.10	DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP91656P2S																							
A2					X.X	± 0.15	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw																							
A1					X	± 0.25	ROCPCU TECHNOLOGY CO.,LTD																											
REV	DATE	REVISION	DESCRIPTION		ISSUE	ANGULAR									—																			
											Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission																							
A					B					C					D					E					F					G				