


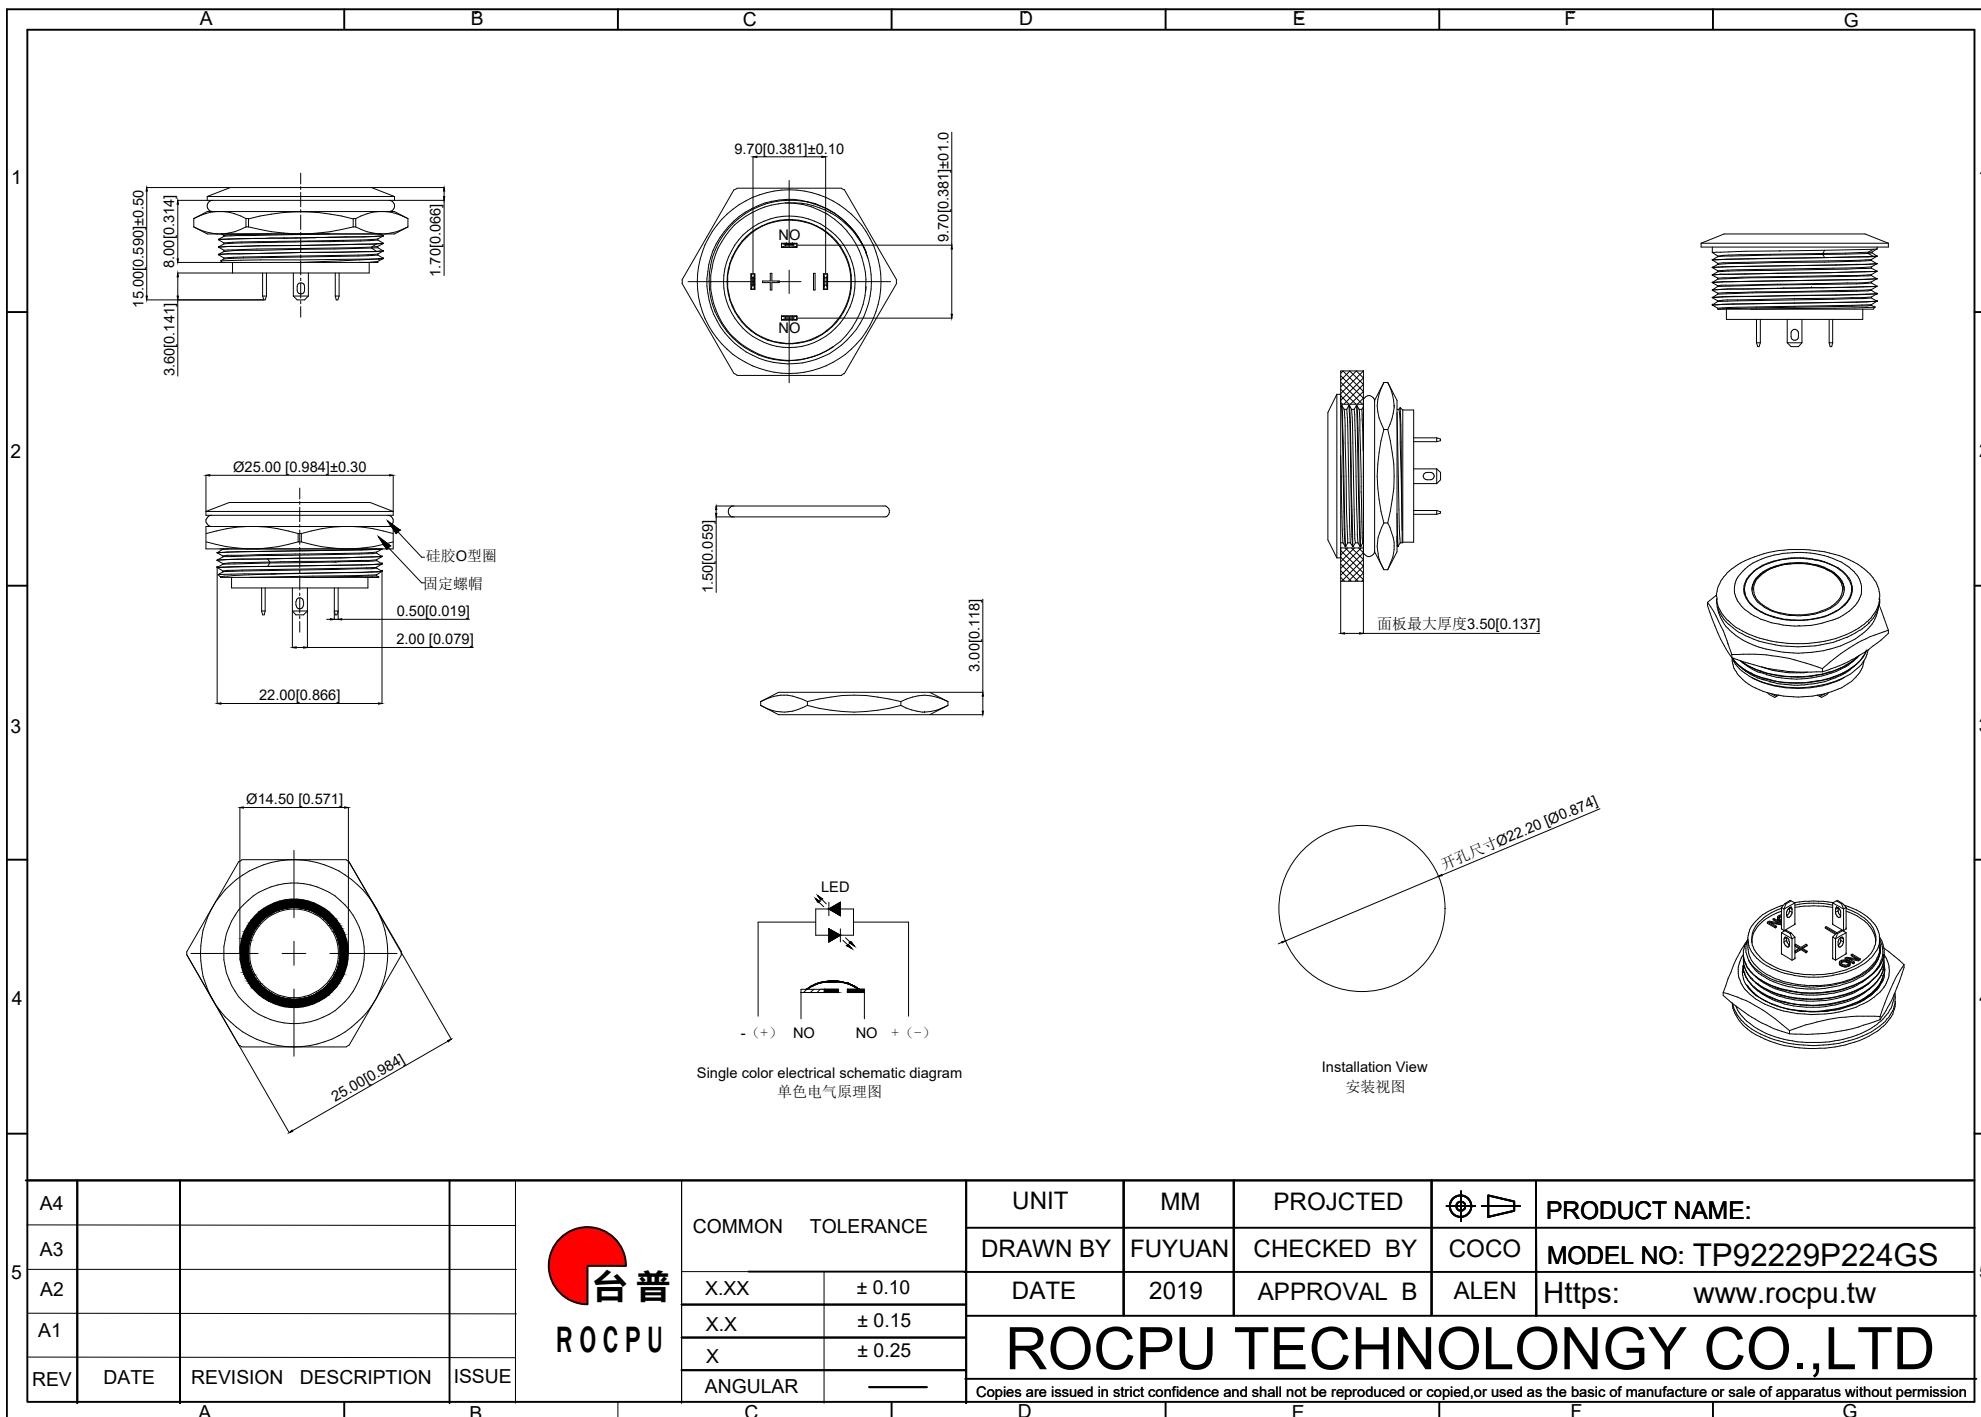

	A	B	C	D	E	F	G							
1	性能参数			13. Electrical life: 200000 cycles 电气寿命: 200000 cycles										
	1. Rated current:0.1A/DC36V 额定电流:0.1A/DC36V			14. mechanical: 1000000cycles 机械寿命: 1000000cycles										
	2. Insulation resistance:≥50MΩ 绝缘电阻 :≥50MΩ			15. Operation method:Unlocking 操作方式: 无锁式										
	3. Contact resistance:≤50mΩ 接触电阻 :≤50mΩ			16. NO reverse thrust foot torque: ≤30N NO反推脚扭力: ≤30N										
	4. Pressing stroke:0.50mm ± 0.10 按压行程:0.50mm ± 0.10			17. LED lamp power consumption: 20m以下 LED灯功耗: 20m以下										
2	5. Contact stroke:0.50mm±0.10 接触行程 :0.50mm±0.10			18. LED lamp lifespan: 40000h LED寿命: 40000h										
	6. welding temperature: 320 ℃± 20 ℃ 焊接温度: 320 ℃± 20 ℃			19. LED color: Green LED颜色: 绿色										
	7. Welding duration: Less than 3 seconds in duration 焊接时长: Less than 3 seconds in duration													
	8. Nut assembly torque:5-14N 螺帽装配力矩:5-14N													
	9. Protection level:IP67 防护等级:IP67													
	10. Explosion prevention level: IK08 防暴等级: IK08													
3	11. Working environment temperature: -20 ℃~+55 ℃ 工作环境温度: -20 ℃~+55 ℃													
	12. Compression torque: ≤ 3N 按压扭力: ≤3N													
4														
5	A4				UNIT	MM	PROJECTED		PRODUCT NAME:					
	A3				DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP92229P224GS					
	A2				DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw					
	A1				ROCPCU TECHNOLOGY CO.,LTD									
	REV	DATE	REVISION	DESCRIPTION						ISSUE				
	A		B		C		D		E		F		G	

A					B					C					D					E					F					G				
材质参数																																		
8					LEDpin LED脚					Brass 黄铜					1					Silvering 镀银														
7					luminous zone 发光区					PC 塑料					1																			
6					Pin 引脚					Brass 黄铜					1					gold-plating 镀金														
5					Base 基座					PBT					1																			
4					Arm nut 固定螺帽					Brass 黄铜					1					nickeling 镀镍														
3					Oring O型圈					Silica gel 硅胶					1																			
2					Housing 外壳					SUS 不锈钢					1																			
1					Key 按键					SUS 不锈钢					1																			
NO 序号					Part name 部件名					Material 材料					QTY 数量					Remark 备注														

A4				 台普 ROC PU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3					X.XX	± 0.10	DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP92229P224GS
A2					X.X	± 0.15	DATE	2019	APPROVAL B	ALEN	Https: www.rocpu.tw
A1					X	± 0.25	ROC PU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION	DESCRIPTION		ISSUE	ANGULAR					
Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission											