
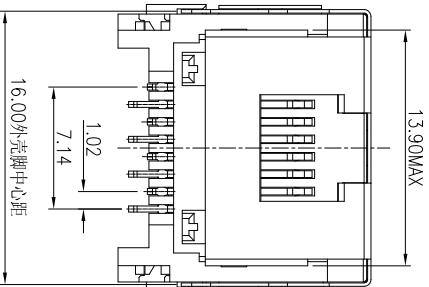
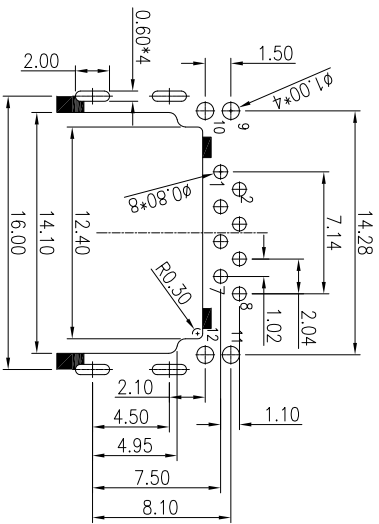

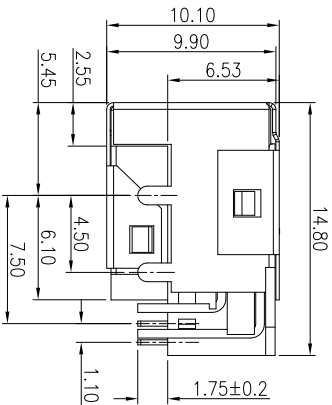
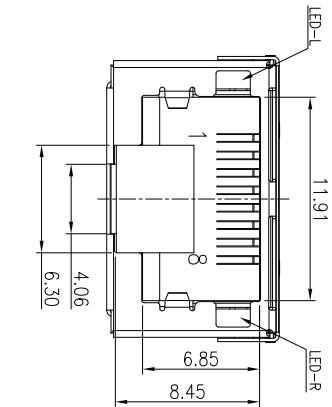



CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 8P8C 沉板6.53mm 带灯	MJ88B3-XX11-HLRVLX6-X

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	—	New Release	Luke	2023.02.28

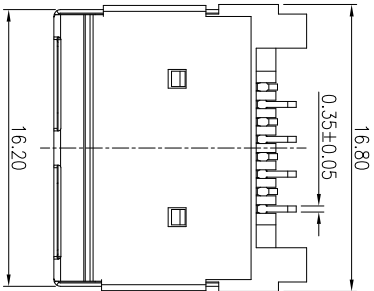



MJ88B3-XX11-HLRVLX6-X

X	Housing Color
B	Black
W	White

X	包装方式
C	卷带包装
P	吸塑包装

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating

X	L-LED	R-LED
1	GREEN	YELLOW
2	YELLOW	GREEN



STANDARD:
1.COMPLIES WITH F.C.C STANDARDS OF PART 68.500

ELECTRICAL:

- 1.VOLTAGE RATING:1254V AC RMS
- 2.CURRENT RATING:1.5AMP
- 3.CONTACT RESISTANCE:1.54MΩ
- 4.INSULATION RESISTANCE:500 MEGOHMS MIN @500V DC
- 5.DIELECTRIC STRENGTH:500V AC RMS 50Hz 1MIN

MATERIAL&FINISH

HOUSING: LCP UL94V-0;
CONTACT: PHOSPHOR BRONZE,Gold Plated On Contact Area,
TIN Plated 80U" MIN On Solder Area.
Ni Plated 30U" MIN Over All.

SHELL: BRASS, Ni Plated 30u" Min

ENVIRONMENTAL:

- 1.STORAGE: -40°C TO +85°C
- 2.OPERATION: -40°C TO +85°C

Recommend PCB Layout

Jack Top View

Tolerance: ±0.05mm

THICKNESS:1.20mm



东莞市合陵电子有限公司
DongGuan Heling Electronic Co.,LTD

SCALE:1/1 UNIT: mm DWG.NO:

UNLESS OTHERWISE
SPECIFIED TOLERANCES

SIZE: A3 PAGE:1 OF 1 REV:A01

DECIMALS: ANGLES:

X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

APPROVED BY	CHECKED BY	PREPARED BY
DICK	XSY	Luke

CUSTOMER COPY