

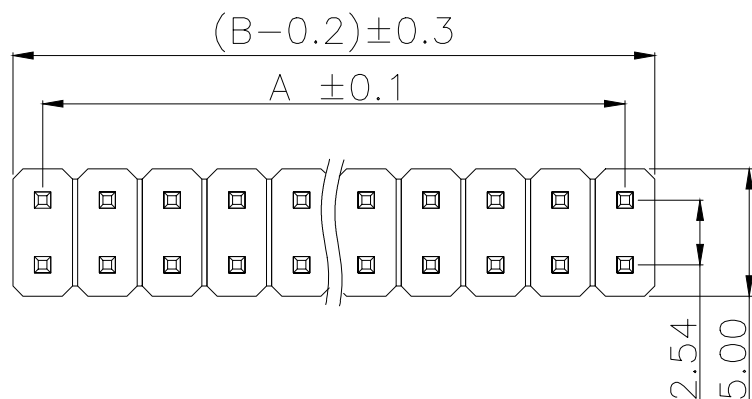
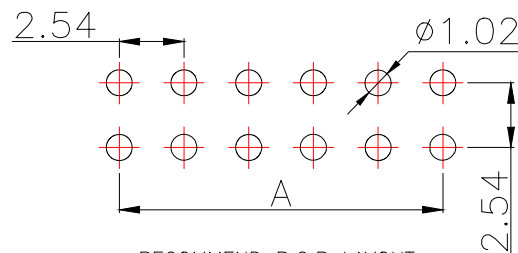


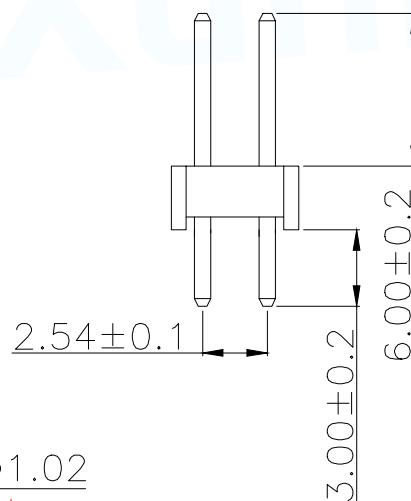

SPECIFICATIONS
Current Rating: 3Amps
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20M Ω Max
Withstanding Voltage: AC 1000V
Operation Temperature: -40° to +105°
Contact Material: Copper Alloy
Standard: PBT
Insulator Material: Polyester (UL 94V-0)
Contact Plating: Gold Flash
Max. Processing Temp: 200°C for 30-60 seconds
(220°C for 5 seconds)

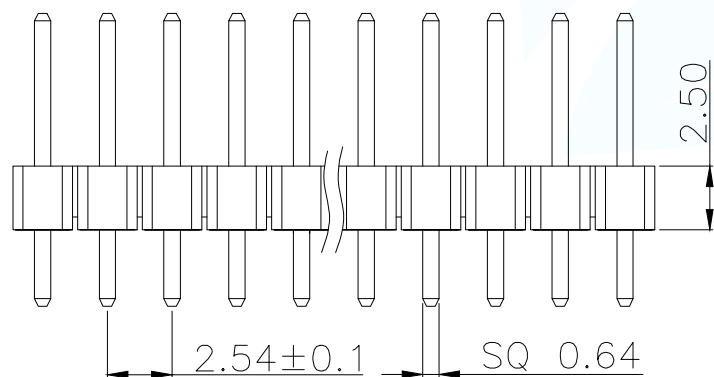

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

P/N	PIN	DIM.A	DIM.B
PH2.54-01-01PZS	2*1	0.00	2.54
PH2.54-01-02PZS	2*2	2.54	5.08
PH2.54-01-03PZS	2*3	5.08	7.62
PH2.54-01-04PZS	2*4	7.62	10.16
PH2.54-01-05PZS	2*5	10.16	12.70
PH2.54-01-06PZS	2*6	12.70	15.24
PH2.54-01-07PZS	2*7	15.24	17.78
PH2.54-01-08PZS	2*8	17.78	20.32
PH2.54-01-09PZS	2*9	20.32	22.86
.....			
PH2.54-01-40PZS	2*40	(PIN-1)X2.54	(PIN)X2.54

PART NUMBER DESCRIPTION:

PH2.54-01-NPZS

↑ (D=单排; S=双排)
↑ (Z=直脚; W=弯脚)
↑ (PIN数量; 01.....40PIN)
↑ (排针开关)

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:2.54PH H2.5 2xNPin 180度 PC3.0 PA6.0 PB2.5 L11.5 PBT	
			PAR	PH2.54-01-NPZS
DWN				
CHKD				
APVD				
SCALE N:A	UNIT:MM			
SIZE:A4	SHEET:1F1		REV:A	
DECIMALS:	ANGLES:		CUSTOMER COPY	
X.±0.30	X°±5°			
X.X±0.20	X.X°±1°			
X.XX±0.10	X.XX°±0.5°			