

1

2

3



4

5

6




REV	MODIFICATION	DRAW	DATE
A.00	新版发行		20201125

A





B

C



D

E

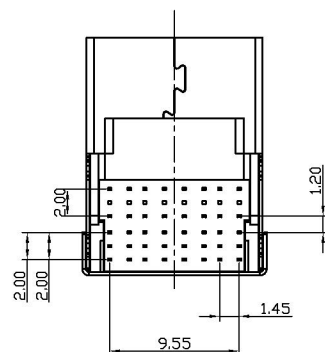

NOTES:

1. HOUSING: LCP, UL 94V-0, COLOR- BLUE (PANTONE 300C) OR BLACK
2. BOTTOM COVER: LCP, UL 94V-0,COLOR- BLUE (PANTONE 300C) OR BLACK
3. CONTACT: USB3 C2680-H T=0.25mm ; USB2 C5191-H T=0.25mm
30μ" MIN. GOLDPLATED ON CONTACT AREA, 120μ" MIN. MATTE TIN
PLATED ON SOLDERING TAIL,80μ" MIN. NICKEL UNDER-PLATED OVERALL
4. FRONT SHELL: SUS304-1/2H, T=0.25mm, 30μ" MIN. NICKEL PLATED OVER ALL,
100μ" MIN. MATTE TIN PLATED ON SOLDERING TAIL,
5. MIDDLE SHELL: SUS304-1/2H, T=0.25mm,
6. REAR SHELL: SUS304-1/2H, T=0.20mm,
7. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS
PER DIRECTIVE 2011/65/EU FOR RoHS COMPLIANT. OR PER IEC
61249-2-21 FOR HALOGEN-FREE COMPLIANT.

圖號: (DRAWNO) 1		LINEAR		ANGLE		深圳市连欣科技有限公司															
		. X 14		X. 17																	
		. XX 15		. X 18																	
		. XXX 16		. XX 19																	
產品名稱: (PARTNAME) TYPE C 16PIN 双层 板上 CONNECT						产品料號:(PARTNO) XUBF-0336-16B04															
核 對 : APPRO. BY		3		廠內料號: (PARTNO) 6				客戶料號: (CLIENTNO) 8				數量: (CNUM)									
設 計 : DESIGN. BY		4										13									
繪 圖 : DAWG. BY		5				單 位: UNIT:		9		比 例: SCALE:		10		張 數: PAPERS:		11		版 本: REV:		12	

1

2

3

4

5

6

REV

MODIFICATION

DRAW

DATE

A.00

新版发行

20201125


A

B

C

D

E

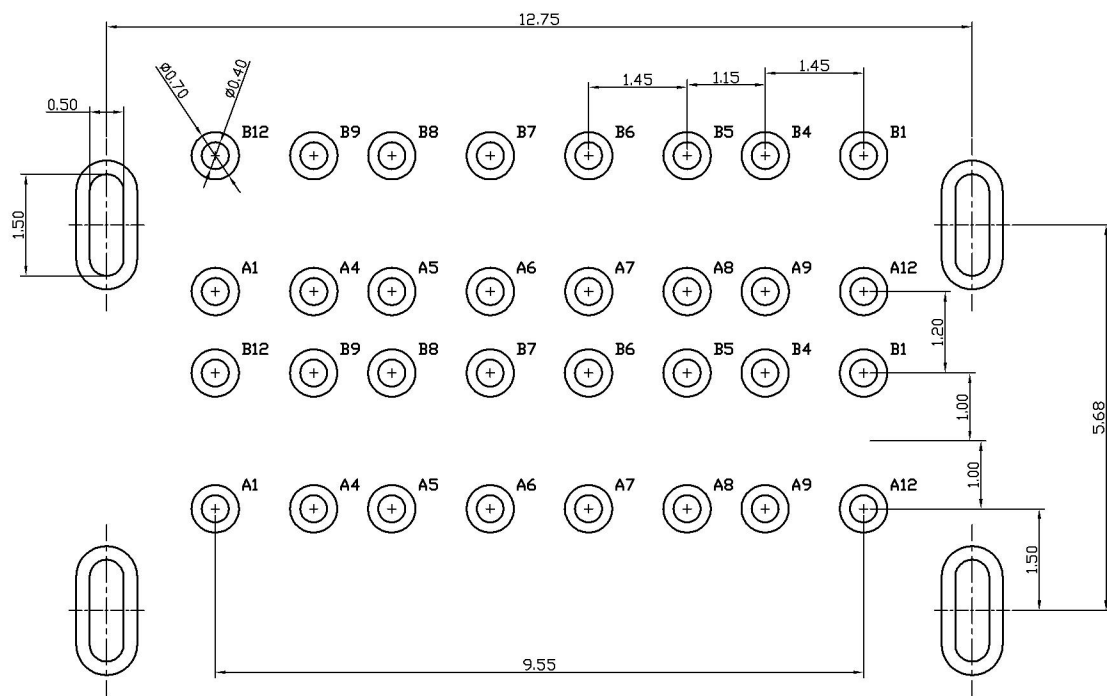

RECOMMENDED PCB LAYOUT(TOP VIEW)
(DEFAULT TOLERANCE:±0.05)

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A4	V _{BUS}	Bus Power	B9	V _{BUS}	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use(SBU)	B5	CC2	Configuraation Channel
A9	V _{BUS}	Bus Power	B4	V _{BUS}	Bus Power
A12	GND	Ground return	B1	GND	Ground return

圖號: (DRAWNO)

1

LINEAR ANGLE

.X	14	X.	17
.XX	15	.X	18
.XXX	16	.XX	19

產品名稱: (PARTNAME)

TYPE C 16PIN 双层 板上 CONNECT

深圳市连欣科技有限公司

产品料號:(PARTNO)

XUBF-0336-16B04

核對:
APPRO. BY

3

廠內料號: (PARTNO)

客戶料號: (CLIENTNO)

數量:
(CNUM)設計:
DESIGN BY

4

6

8

13

繪圖:
DWWG. BY

5

單位:
UNIT:

9

比例:
SCALE:

10

張數:
PAPERS:

11

版本:
REV:

12

1	2	3	4	5	6		
				REV	MODIFICATION	DRAW	DATE
				A.00	新版发行		20201125


A

B

C

D

E

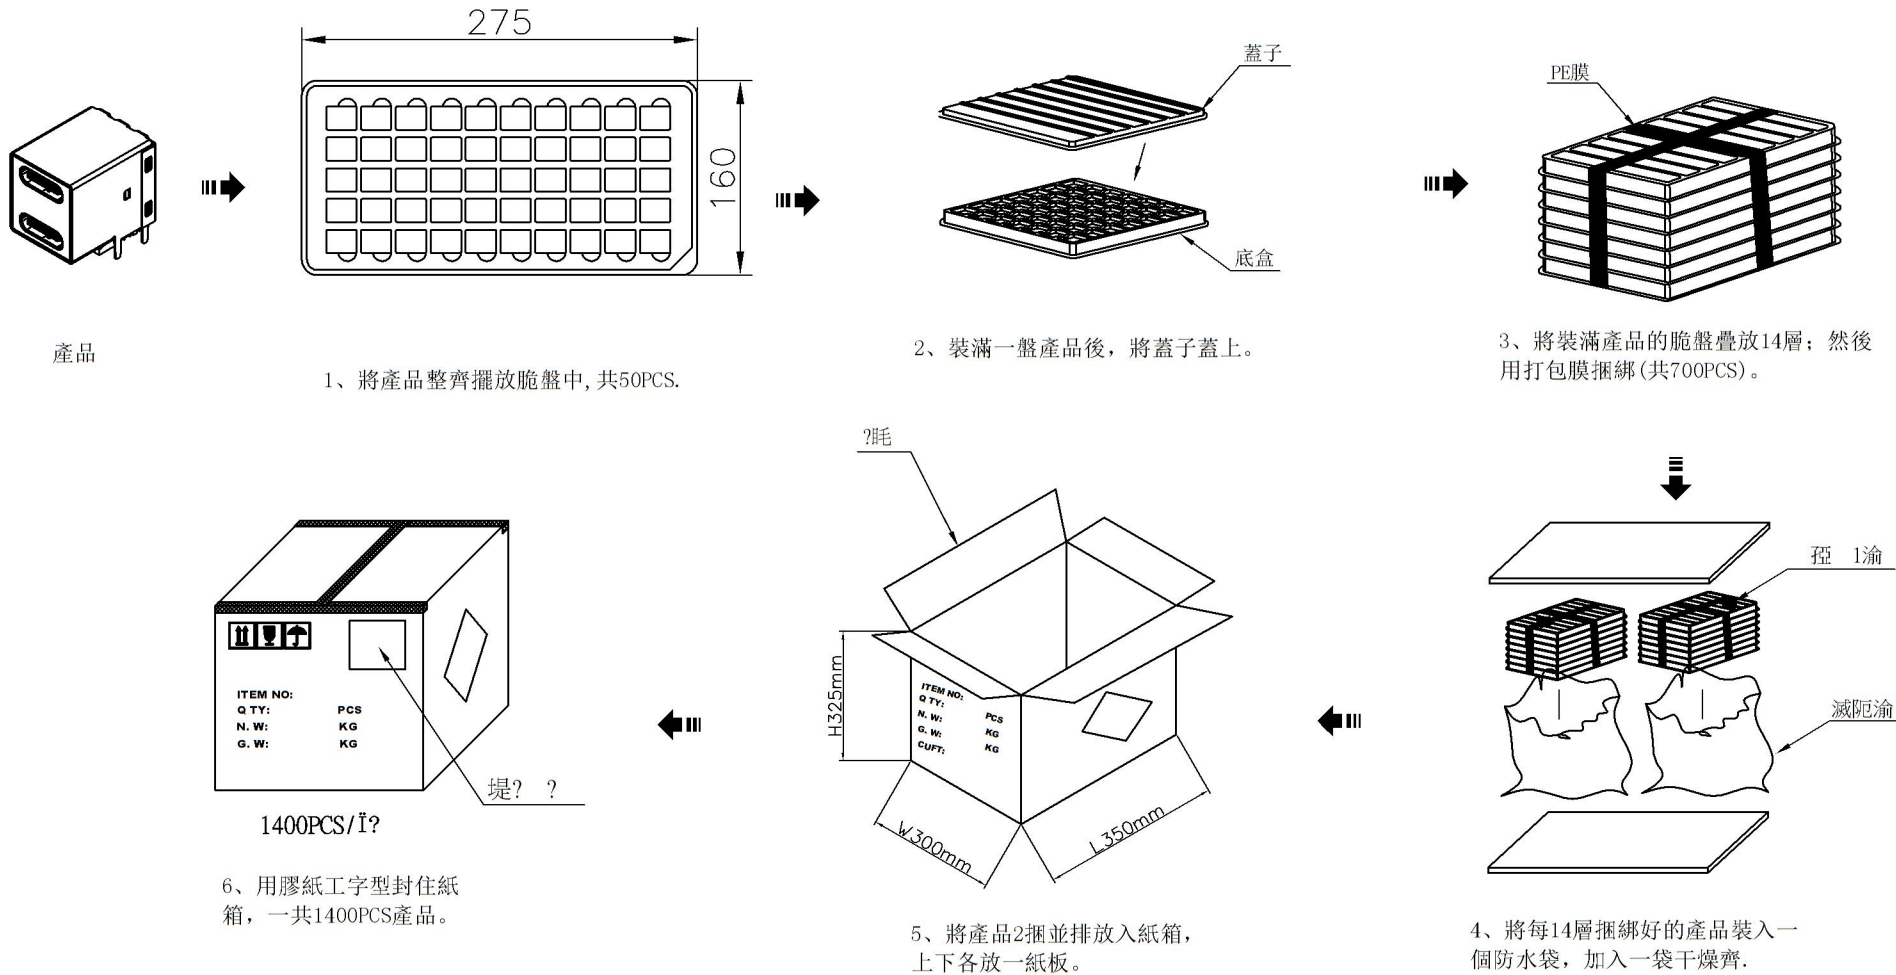

作業步驟:

1) 家 漆佬溫 毯厘篋て僕50PCSて姪岔岔岔 (

2) 妮 50PCS家 腔毯厘浮溫14厘て蚯湖婦臚嬰て (

3) 嬰?疑腔家 溫 減阨渝篋て姪溫 1渝 亞 て糯 猾諳(僕700PCS) (

4) 斐?眊菁珂溫玲??啣て 綴 嬰疑腔家 齷溫 ?眊て? 姪溫玲??啣.

5) 磁玆?眊標て姪蚯糯 馱趺倭 ?眊猾諳て漆佬僕1400PCS家 (

6) 悞玆堤? ?て 岨錨 眊割眊 甜 (

7) ?眊第斯喜渡口K=K 350*300*325mm P 方

毯厘第斯喜渡口PS減髻? 275*160*14.5mm

圖號: (DRAWNO) 1		LINEAR		ANGLE							
		. X 14 . X 17									
		. XX 15 . X 18									
		. XXX 16 . XX 19									
產品名稱: (PARTNAME) TYPE C 16PIN 双层 板上 CONNECT				產品料號:(PARTNO) XUBF-0336-16B04							
核 對: APPRO. BY 3		廠內料號: (PARTNO) 6				客戶料號: (CLIENTNO) 8				數量: (CNUM)	
設 計: DESIGN. BY 4										13	
繪 圖: DAWG. BY 5				單 位: UNIT: 9		比 例: SCALE: 10		張 數: PAPERS: 11		版 本: REV: 12	

深圳市连欣科技有限公司