

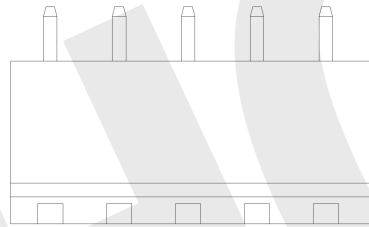
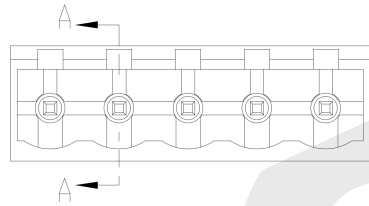


SECTION A-A

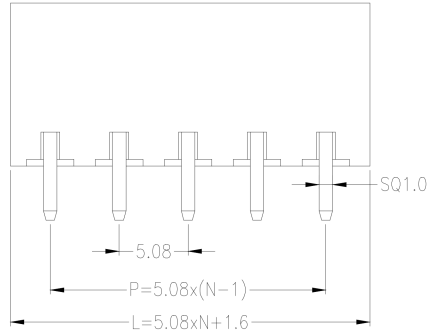

公差参数

Poles	Dim	Dim P	Dim L
2-6P	±0.10	±0.20	±0.20
7-12P	±0.20	±0.30	±0.30
13-18P	±0.25	±0.40	±0.40
19-24P	±0.30	±0.50	±0.50

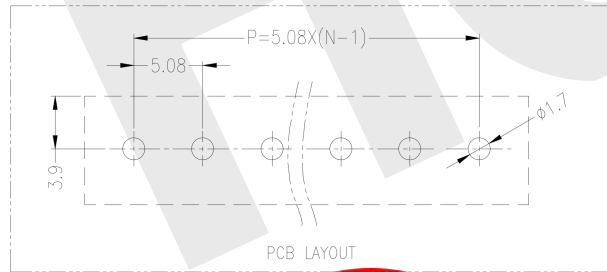

PCB LAYOUT

材料及电镀

- ①. 塑件主体: PA66, UL94V-0
②. 焊 针: 黄铜, 镀镍

电气性能

额定电压: 300V
额定电流: 15A
接触电阻: 20mΩ (Max)
绝缘电阻: 500MΩ \DC500V
耐 电 压: AC2000V\1Min

机械性能

温度范围: -40℃ ~ +105℃
瞬时温度: +250℃ , 5秒

Ordering Information

HC2EDG * * - * - NP - *

Type 1=直针 2=弯针 3=带钩	颜色-针口 C=铜线 B=铜线	PITCH 2.54=2.54mm 3.5=3.50mm 3.81=3.81mm 5.08=5.08mm 7.62=7.62mm	No. of Pins 2-24Pin 2P=2Pin 3P=3Pin	Colour V=Green L=Blue O=Orange R=Red B=Black GR=Gray
------------------------------	-----------------------	---	---	--



GENERAL TOLERANCE

DIM TOL

X. X ±0.50

X. XX ±0.30

X. XXX ±0.10

Angle ±3.0°

制 图

DRAWING

审 核

批 准

比 例

SCALE

投 影



深圳市华灿天禄电子有限公司
ShenzhenhuaciantianluELECTRONICS CO., LTD

产品名称 5.08 单排 插拔式 接线端子 版本 A
TITLE 封闭 直针 REV.

产品料号 HC2EDGVC-5.08-NP-X 单位 mm
PART NO. UNITS

材料 页次 1/1
MATERIAL SHEET