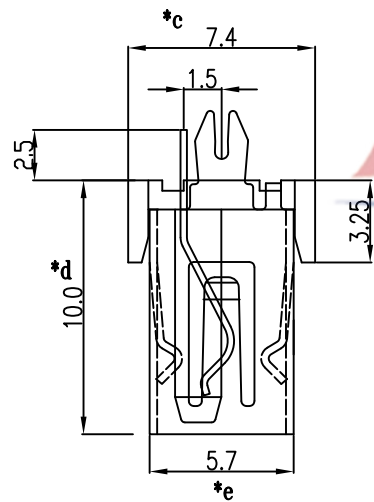
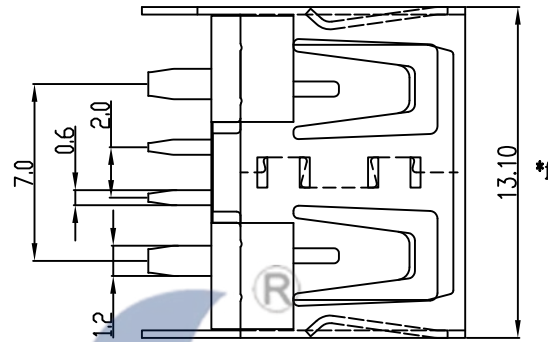
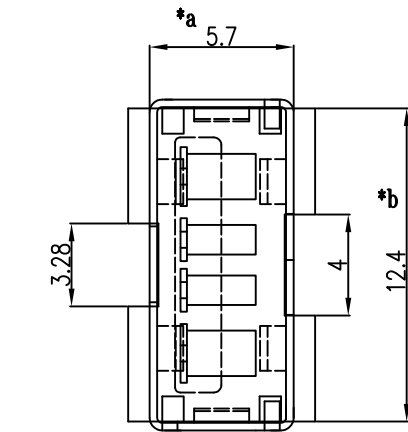


P.C.B LAYOUT

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
5A contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voitage:
500 V AC AT Sea Level
5. 绝缘阻抗: Lnsulation Resistance:
1000MEGA ohms MIN

					TOLERANCE UNLESS SPECIFIED								
					UP TO 5mm:±0.1	ANGULAR	1						
					ABOVE 5mm:±0.2	±1°	NO	DATE	REVISIONS		BY	APPD	
					TITLE: USB JACK				UNIT : MM	ROHS	DWN		
3	SHELL	BRASS/SPCC	1	Ni-Plated	MODEL: USB-125-W-CU-5A				SCALE: 1:1	COMPLIANT	CHK'D		
2	CONTACT	BRASS	4	Au/Sn-Plated	 皓宇 HOYU DONGGUANG HAOYU ELECTRONICS CO., LTD 东莞市弘皓电子有限公司						APPD		
1	HOUSING	PBT/LCP	1										
NO.	PART	NAME	MATERIAL	QTY	FINISHING				PRO.AGL: 			REV :A0	