

0.18(Min.Working Position)
0.09(Working Position)
-0.02(Max.Working Position)


1.60
1.80
1.90

(For Reference Only)
Stated At Compression


0.53
Contact Area

0.60 (Pick Up Area)

1.00
1.10
1.28REF



3D View

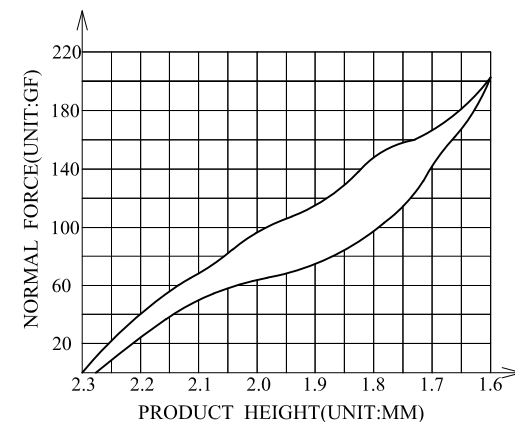

- NOTES:
- 1:MATERIAL
1-1: SUS-301 THICKNE=0.10MM
 - 2:SPECIFICATIONS
2-1: RATED CURRENT: 1.0A
2-2: VOLTAGE RATING: 1.5V
2-3: CONTACT RESISTANCE: 80mΩ/MAX
2-4: WELDING THRUST: ≥3KG
2-5: OPERATING TEMPERATURE: -40°C~+85°C
 - 3:DURABILITY: 1500 CYCLES
 - 4:SALT SPRAY TIME: 24H
 - 5:ELECTROPLATE: THE NICKEL-PLATED SUBSTRATE IS 50u" MIN
 - 6:REQUIREMENTS
6-1:TERMINAL TO EAT FULL TIN,NOTPEELING,
WELDING OBVIOUS COLOR AND OTHED ADVERSE
6-2:ROHS、REACH、HF HALOGER ADVERSE OF DOMESTIC
AND INTERNATIONAL ENVIRONMNTAL REQUIREMENTS

0.45

0.06 X

Over Pick& Place Area

1.35

-X-

1.00
1.20
1.90±0.10

1.60(Max.Working Position)
1.80(Working Position)
1.90(Min.Working Position)

2.30-0.10

+0.15

0.08 X

Solder Area

0.64
0.10 X

1.55

-Y-

1.00±0.10

1.00
0.10
1.10

RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05MM
(FOR REFERENCE ONLY)

1.00
0.20
1.10

METAL MASK T=0.08

TOLERANCE:±0.05MM
(FOR REFERENCE ONLY)



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 天线弹片 L1.90*W1.0*H2.3	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW-TXT191023A	
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2406071436	
			SHEET NO. 1 OF 1	