



SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C


Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

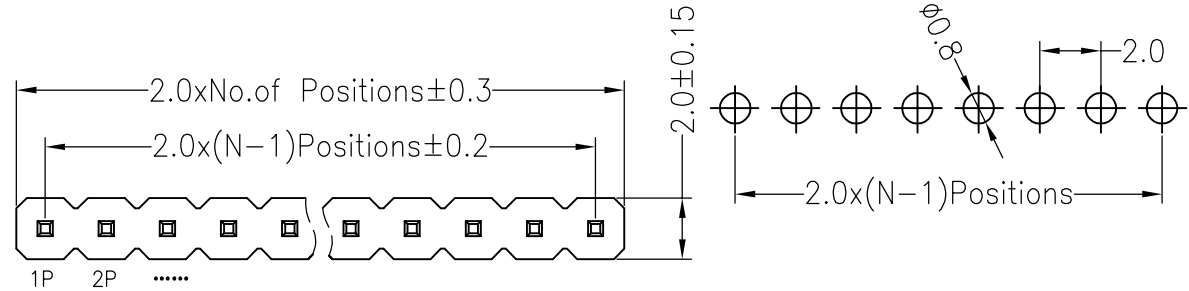

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Ordering Information

1320 11 XX X N XX S XXX X 0X



No.of Pins
Per Row
1x40
2x40
3x40
1--40
2--80
3--120

Insulator Material
Option
A=BK-PBT
B=BK-PA66
C=BK-PA6T
D=BK-PA46
E=BK-PA9T
F=BK-LCP

Contact Plating
G0:0.8U" Gold
G1:1U" Gold
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
S0:Gold Flash/Tin
SN:Tin

Pin Length

Packing
O=PE Bag
A=Tray
T=Tube
P=Tube+Cap
R=Reel+Cap
M=Reel+Mylar

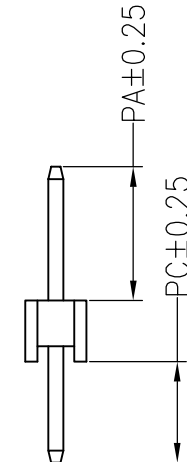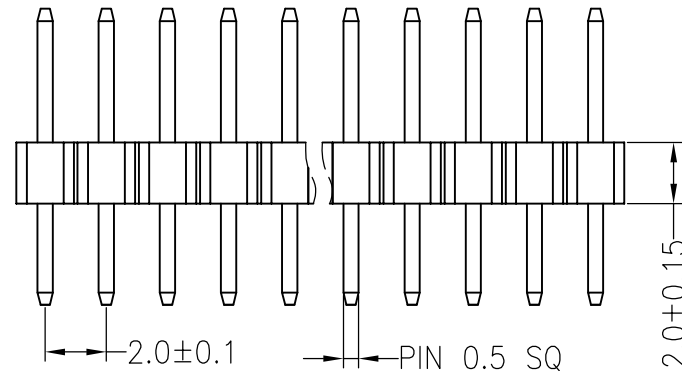

Dimension antitheses list

ITEM	PC	PA	L
Standard	2.80	3.90	8.70
Alternate			

OPERATION

DRAW

卢能

2016.9.10

SCALE

FIT

X.X

±0.30

X.XX

±0.20

X.XXX

±0.10

Angle

±3°

DIM

TOL

CHECK

APPROVE

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

深圳市连盛精密连接器有限公司

PART NO.

1010200012

TITLE:

2.0PH H=2.0 1xNpin DIP



No.of Pins
Per Row
1x40
2x40
3x40
1--40
2--80
3--120

Insulator Material
Option
A=BK-PBT
B=BK-PA66
C=BK-PA6T
D=BK-PA46
E=BK-PA9T
F=BK-LCP

Contact Plating
G0:0.8U" Gold
G1:1U" Gold
G2:1.5U" Gold
G3:2U" Gold
G4:3U" Gold
S0:Gold Flash/Tin
SN:Tin

Pin Length

Packing
O=PE Bag
A=Tray
T=Tube
P=Tube+Cap
R=Reel+Cap
M=Reel+Mylar

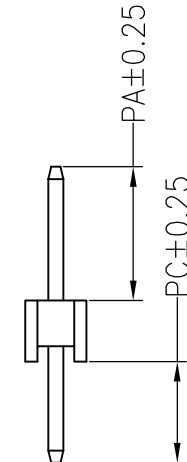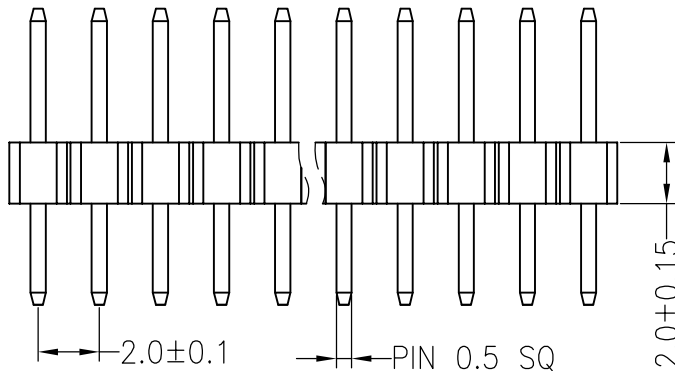

Dimension antitheses list

ITEM	PC	PA	L
Standard	2.80	3.90	8.70
Alternate			

OPERATION

DRAW

卢能

2016.9.10

SCALE

FIT

X.X

±0.30

X.XX

±0.20

X.XXX

±0.10

Angle

±3°

DIM

TOL

CHECK

APPROVE

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

深圳市连盛精密连接器有限公司

PART NO.

1010200012

TITLE:

2.0PH H=2.0 1xNpin DIP