
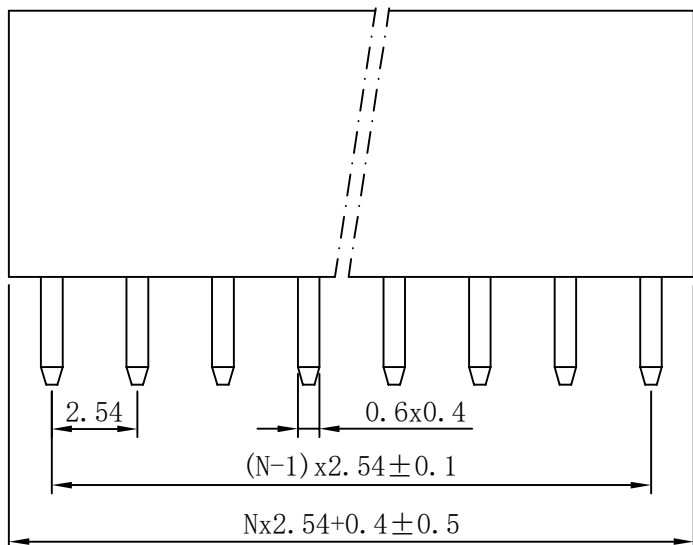
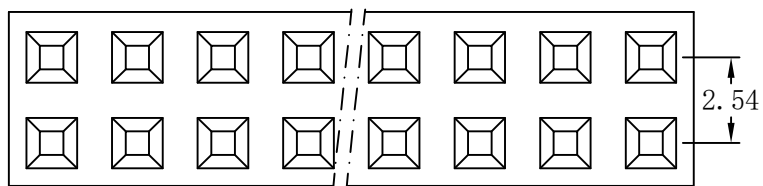


P.C.B Layout

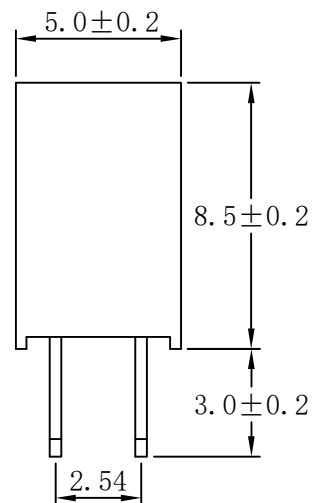

一. 电气性能:

1-1. 额定电流: 3A AC DC.

1-2. 绝缘电阻: $\geq 500M\Omega$ Min

1-3. 耐 压: 300V AC/Minute

二. 物理特性:

2-1. 操作温度: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$

三. 材质:

3-1. 塑胶: PBT(Black) UL94V-0

3-2. 插针: Brass/Gold plated

_____		new		2015/5/3		A		瀚源
ECN BO.		DESCRIPTION.		DATE.		REV.		
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER				SCALT: 1/2	SCALE: 3:1
Mikey	Tom	Jerry	PART NAME	2541FV-2xXXP-B		UNLESS OTHERWISE SPECIFIED,TOLERANCE:	X. ±0.25	
			MODEL NAME	2541FV-2xXXP-B			X.x ±0.20	
					X.xx ±0.15			
			3RD ANGLE PROJ	HanElectricity Co.,LTD			ANGULAIR ±3	
				FILE.NO.				