


RoHS

SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40℃ to +105℃

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230℃ for 30−60 seconds
(260℃ for 5 seconds)

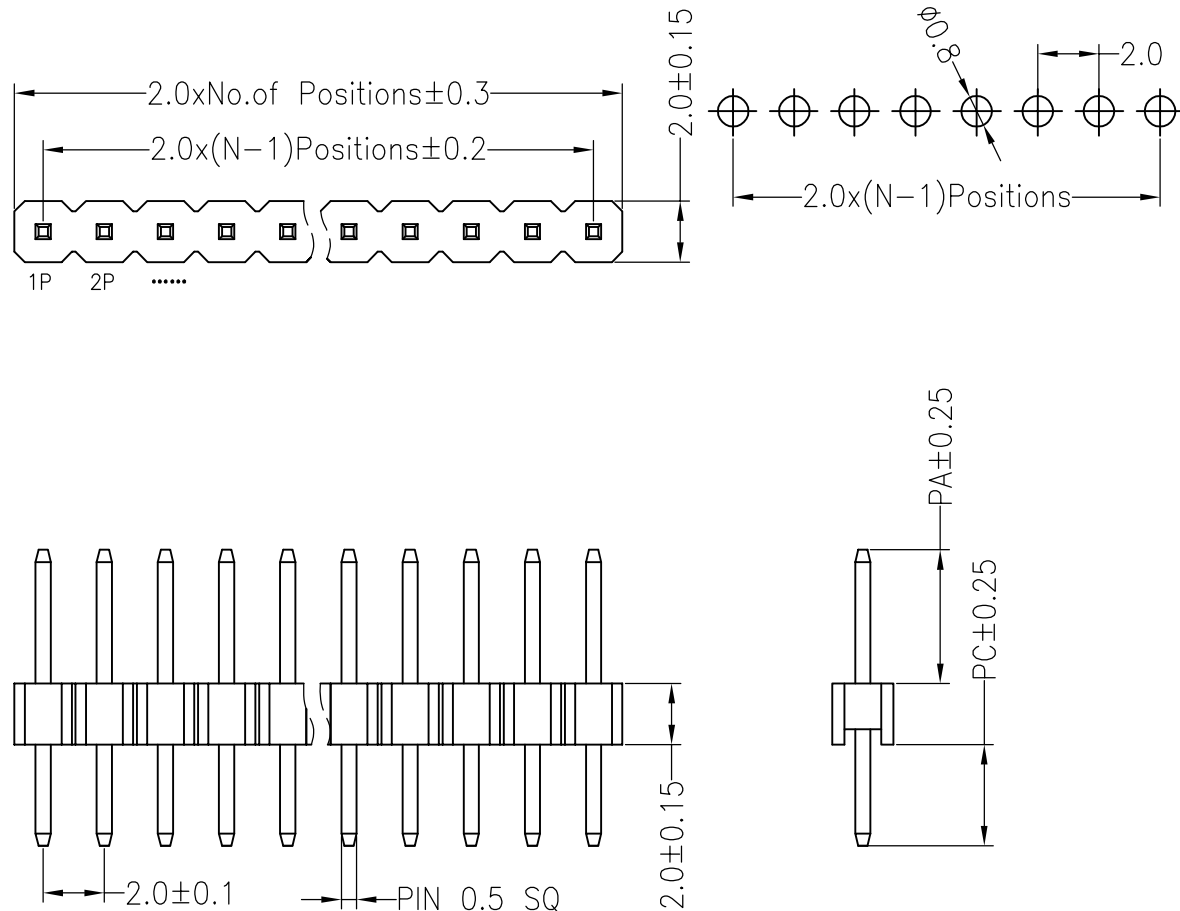

料号 : PH-00083

Dimension antitheses list			
ITEM	PC	PA	L
Standard	2.80	3.9	8.7
Alternate			

				OPERATION		DRAW			SCALE	FIT	深圳市连盛精密连接器有限公司	
				X.X	±0.30					UNIT		
				X.XX	±0.20	CHECK			SIZE	A4		
A0	2012.04.11	NEW DRAWING		X.XXX	±0.10	APPROVE			SHEET	1/1	PART NO.	1010200011
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle		±3°			PROJ.		TITLE:
					DIM	TOL						