

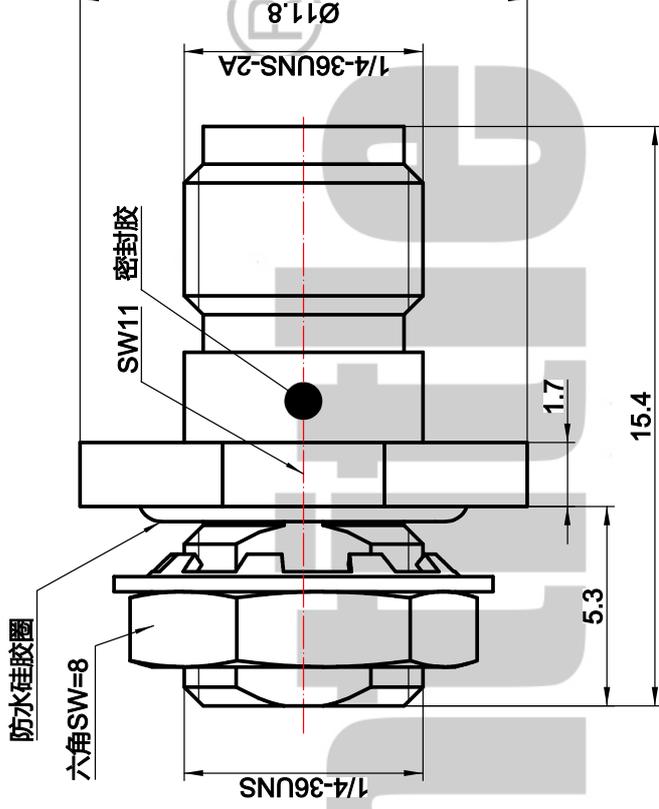


1. 材料和电镀 Materials and Finishes:  
 外 壳\Body - 黄铜\Brass, 镀三元合金\Tri-metal plating  
 内导体>Contact - 铍铜\Beryllium copper, 镀金\Gold plating  
 绝缘体\Insulator - 聚四氟乙烯\Teflon, 本色\Natural  
 附件\Accessories - 黄铜\Brass, 镀三元合金\Tri-metal plating  
 2. 电气性能 Electrical:

- A. 特性阻抗\Impedance: 50 Ohm  
 B. 使用频率\Frequency range: DC-6GHz  
 C. 介质耐压\Breakdown voltage: 500V rms  
 D. 绝缘电阻\Insulation resistance: 2000 MΩ  
 3. 机械性能 Mechanical:  
 A. 使用寿命\Durability: 500 cycles  
 B. 中性盐雾\Salt spray: 96 hours  
 C. 防水等级\Waterproof level: 内外IP67

推荐安装开孔尺寸

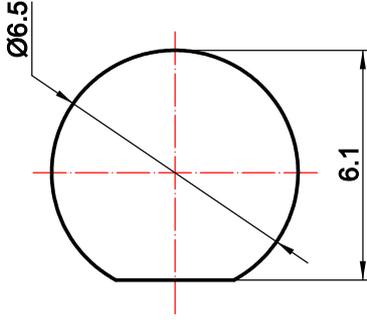

设计	JAT	2024.01.03
审核	DF	2024.01.03
批准	DF	2024.01.03

版次	比例	5:1
第一角法		
1. 未注公差按ISO2768-1(m) 2. 去尽毛刺C0.13max 3. 各圆同轴度Ø0.1max		
*尺寸为重要尺寸		单位 mm

料号	CT6.1.243
规格	SMA-MCX-KKYM
名称	SMA母转MCX母穿墙转接器

**entitle** 深圳成泰电子有限公司  
 www.entitle.net