

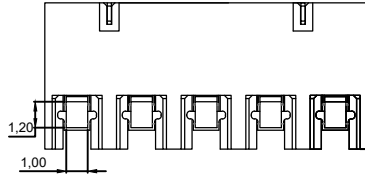
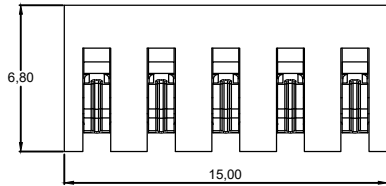



**SAMZO REAC/ROHS**

REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2018.06.14




Performance:  
 Rated current: 3A  
 Rated voltage: 24V  
 Voltage withstand: 500V  
 Contact resistance: 30m Ω  
 Insulation resistance: 500M Ω  
 Working temperature: -40 °C ~ +85 °C




**15 H 7 \* 5 0 5 3**  
 (A) (B) (C) (D) (E) (F) (G) (H)

A. Series: 15: 3.0 - 60 series  
 B. Spring contact pitch: H - 3.0mm  
 C. Fixing method: 7 - Vertical patch  
 D. Product height: 1 - H2. 4/2-H3. 5mm  
 E. PIN NO: 5-5PIN  
 F. Main body material: 0 - LCP  
 G. Spring contact material: 5 - COPPER ALLOY  
 H. Mold code: 3 - 3U

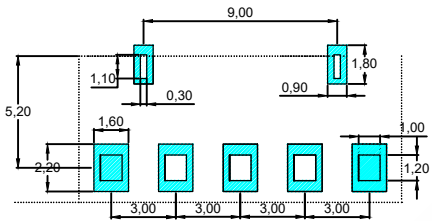

RECOMMENDED PCB LAYOUT  
 TOP VIEW (. XX ± 0.05)

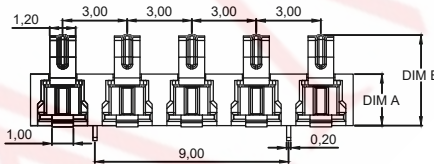

PART NO.	DIM A	DIM B
15H71-5-5053	2.4	4.30 ± 0.25
15H72-5-5053	3.5	5.40 ± 0.25

ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR	DESIGN	DATE	GENERAL TOLERANCE
B	塑胶	LCP	1	黑色	WANGGUIFA	2018.06.12	≥0~2< ±0.15
A	触点	铜合金	1	镀金3u	ZHENGUILAN	2018.06.12	≥2~5< ±0.25
A					LILIANJIANG	2018.06.14	≥5 ±0.35

FIRST VIEW

SCALE: 1:1 UNIT: mm

**SAMZO COMPONENTS**  
 Electronic switch and connector manufacturer

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM

TITLE: 15H7-3.0MM-C06
DWG NO: 15H7-P0611
PART NO: 15H7C06113
MODEL NO: 15H7-* -55053
NAME: DC CONN