



		D		E	
REV.	DESCRIPTION	ECN NO.	NAME	DATE	

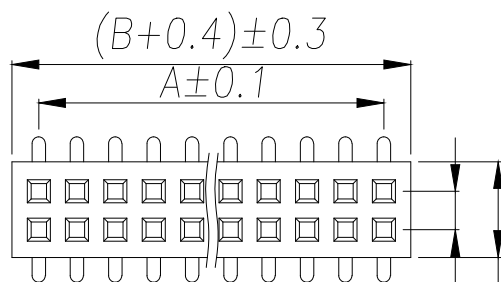

SPECIFICATIONS
 Current Rating:0.75 Amps
 Withstanding Voltage:AC 500V
 Insulation Resistance:1000MΩ Min
 Contact Resistance:20mΩ Max
 Operation Temperature:−40°to+105°
 Insulator Material:Polyester(UL94V-0)
 Contact Material:Phosphor bronze
 Standard:PA6T
 Contact Plating:Gold Flash
 Max.Processing Temp:240°C for30–60seconds
 (260°C for5seconds)

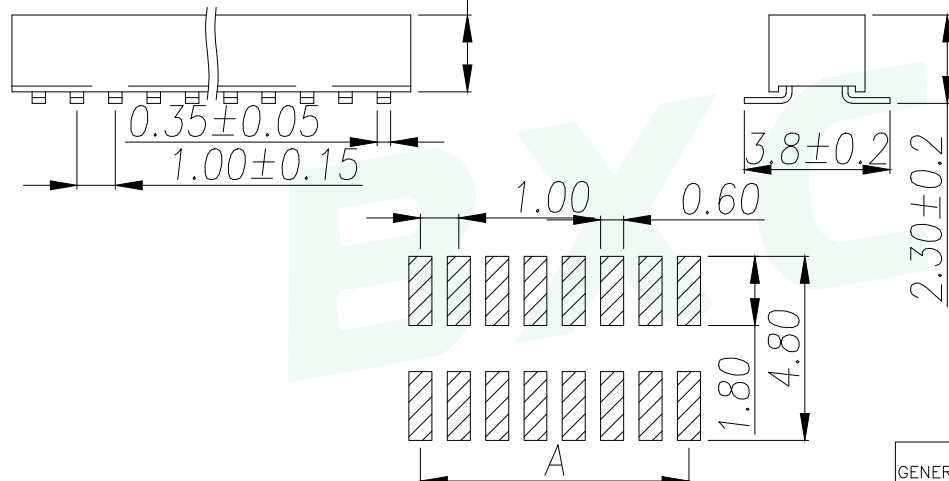

RECOMMEND P.C.B LAYOUT

PCB TOLERANCE: ± 0.05 (TOP VIEW)

GENERAL TOLERANCE		DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD						
DIM. TOL. X X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 GENERAL ANGLE: ±3°		TITLE: 1.0FH H2.0 2xNPin SMT W2.5 U型 PC3.8 PB2.3 6T						
DWG. NO.: B100US-WSNP					DRAWN: MAX			
PART NO.: B100US-WSNP					CHECKED: ELLA			
UNIT: mm SCALE: none SHEET: 1 of 1 DWG. SIZE: A4 LAYER: bxconn					APPROVED: WILL			