

RoHS

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃



Contact Material:Brass

Contact Plating:Au Over Ni



Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 5 seconds)

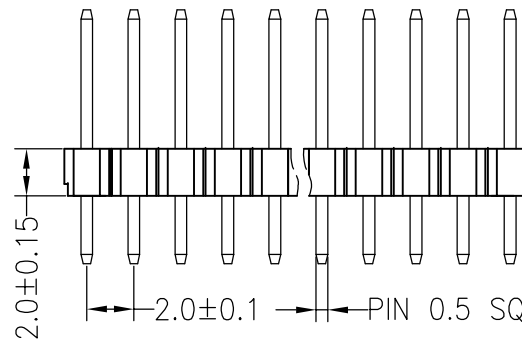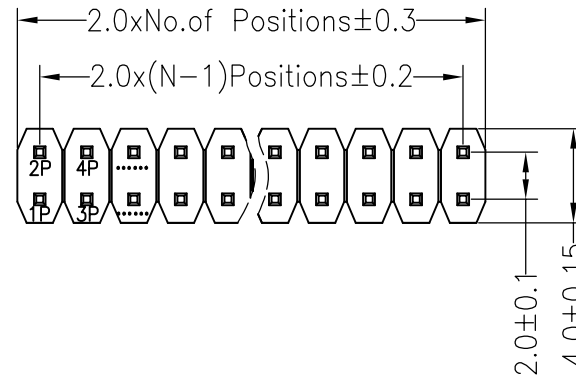

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

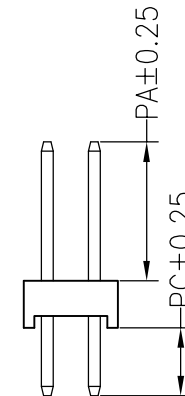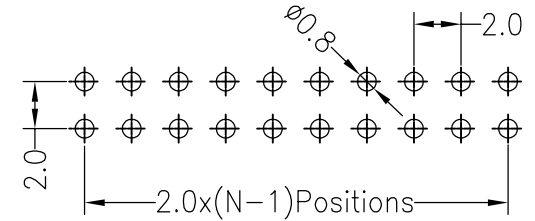

Dimension antitheses list			
ITEM	PC	PA	L
Standard	2.80	3.90	8.70
Alternate			

深圳市连盛精密连接器有限公司

OPERATION

DRAW

SCALE

FIT

X.X

±0.30

UNIT

mm

X.XX

±0.20

CHECK

SIZE

A4

X.XXX

±0.10

APPROVE

SHEET

1/1

Angle

±3°

PROJ.

◆

DIM

TOL

PROJ.

◆

PART NO.

1010200042

TITLE:

2.0PH 2x4pin H2.0mm DIP

A0

2012.04.11

NEW DRAWING

CHANGE

APPROVE

1

2

3

4

5

6

7

8

9