

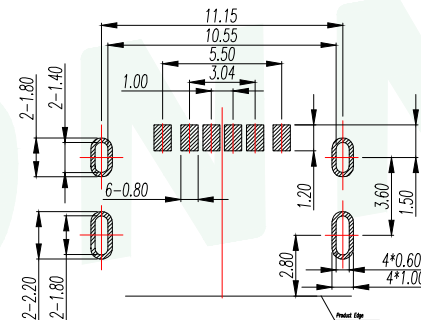



1


备注(NOTE): 1. 材质:
1.1 胶芯: LCP UL94 V-0
1.2 端子: C2680(H65): 镀底, 镀金. 50U
1.3 外壳: 不锈钢201—表面镀镍50U
2. 电气特性:
2.1. 接触区: 接触电阻30mQMax,
允许10mΩ变化量,
测试条件: 20mv, 100mA 下测量,
2.2. 额定电流: 最大3A
2.3. 额定电压: 5V.
2.4. 耐电电压: 100VAC.
2.5. 绝缘电阻: 至少100兆欧
3. 机械性能:
3.1. 插入力: 0.5—2.0Kg
3.2. 拔出力: 0.8—2.0Kg
3.3. 插拔次数: 5000+.
4. 工作环境: —20℃ to +85℃
4.1. 盐雾测试 24H

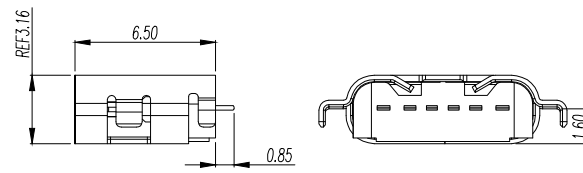

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

PIN ASSIGNMENTS

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

GENERAL TOLERANCE		DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD				BXCONN®	
DIM. TOL. X X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 GENERAL ANGLE: ±3°		TITLE: USB-typeC 6pin 1.6/6.5H					
		DWG. NO.: UC19-0B06F65011		DRAWN: MAX			
		PART NO.: UC19-0B06F65011		CHECKED: ELLA			
		UNIT: mm	SCALE: none	SHEET: 1 of 1	DWG. SIZE: A4	LAYER: bxconn	APPROVED: WILL