

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃

Contact Material:Brass





Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA9T

Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

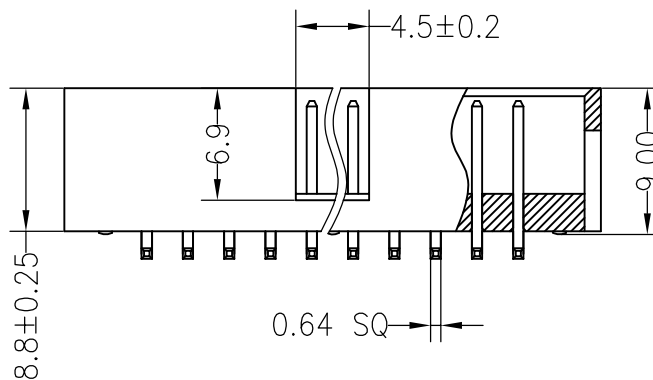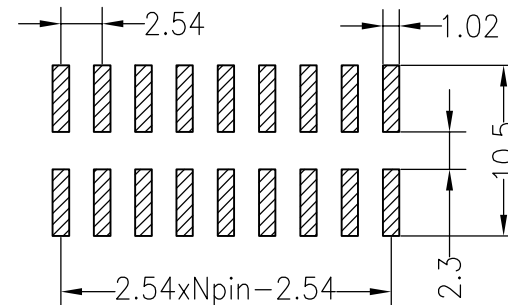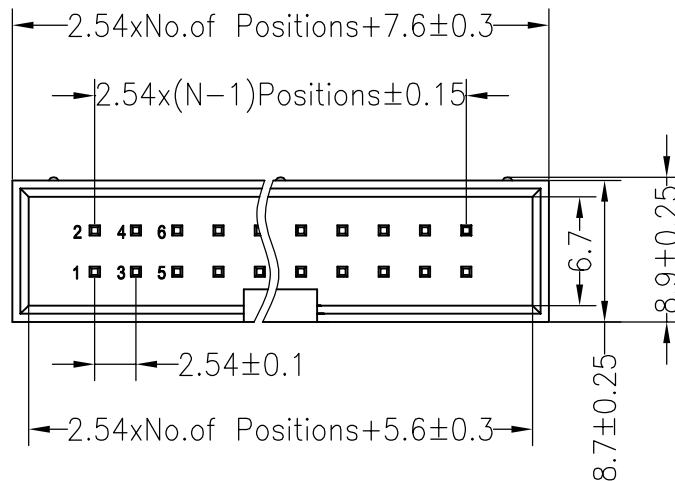

Ordering Information

J	3	038	3	00	9	1	X	XXXX
产品类型 J=筒牛	间距 3=2.54	总pin数 2-100P	产品形态 3=SMT	电镀厚度 SN=镀锡 00=常规 01=1u" 02=2u" 03=3u"	塑胶材料 9=PA9T	塑胶材料 1=黑色 2=灰色 3=白色 4=蓝色 5=红色 6=黄色 7=灰白色	包装方式 1=管装 2=卷装 3=盒装 4=袋装 5=盒装	序列号

				OPERATION		DRAW			SCALE	FIT	深圳市连盛精密连接器有限公司	
				X.X	±0.30					UNIT		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	1030300289
A0	2012.03.28	NEW DRAWING		X.XXX	±0.10				SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	APPROVE			PROJ.		TITLE:	2.54BOX 38P H=8.8 SMT=9.5 总高10.5 L=12.7 AU0.6U PA9T
					DIM		TOL					