

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass





Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

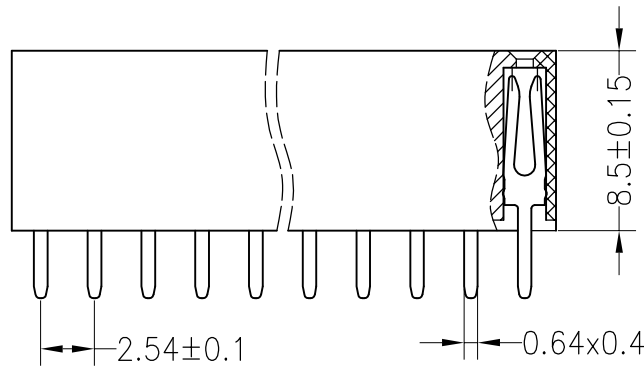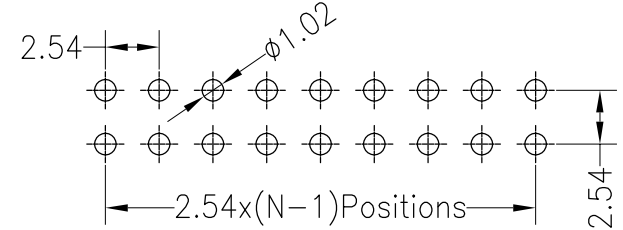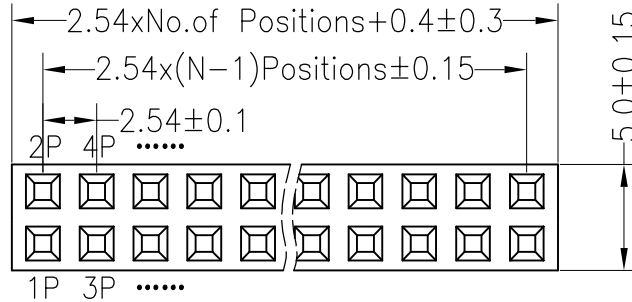

OPERATION

X.X

±0.30

X.XX

±0.20

X.XXX

±0.10

Angle

±3°

DIM

TOL

DRAW

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

深圳市连盛精密连接器有限公司

PART NO.

1020300253

TITLE:

2.54FH H8.5 2x20pin 180° W 5.0mm

1

2

3

4

5

6

7

8

9