


电话：0769-82310511-867
邮箱：hooya89@hooya.hk







NOTES:

- 1.Circuit: ON/OFF
- 2.Operation force: $500 \pm 200\text{gf}$
- 3.Electrical rating: 8A 250VAC ULCUL CQC
15A 125VAC ULCUL CQC
12(6)A 250VAC ENEC
- 4.Contact resistance: $<50\text{m}\Omega$
- 5.Insulation resistance: $>100\text{M}\Omega$
(500VDC between open contacts)
- 6.Dielectric strength: $>1500\text{V}$ 1 minute
- 7.Color: cover is black(red), body is black.

Panel cut out(Thickness: 3mm Max)

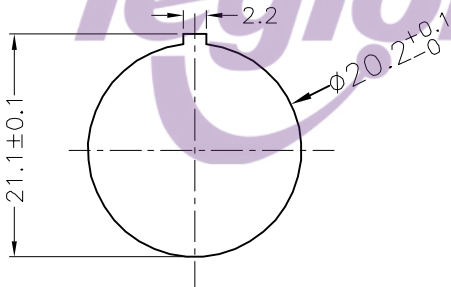

Circuit of Switch

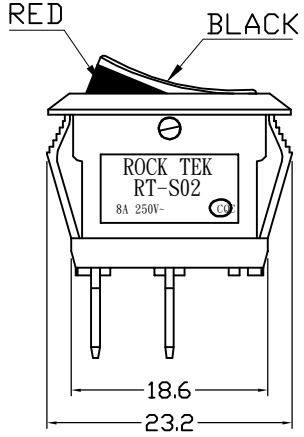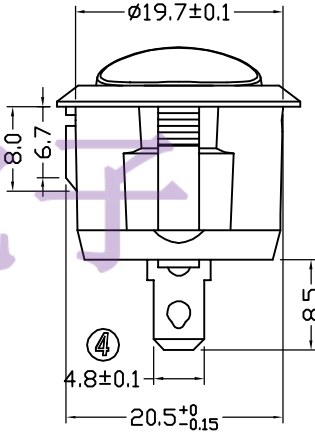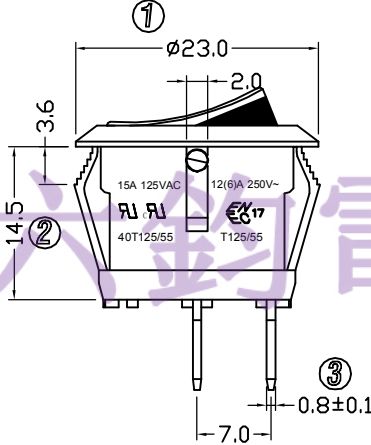

5	→	10	→	DIMENSIONAL TOLERANCES		APPROVED	CHECKED	DESIGN	DRAWN	ALL SIZE ARE IN	MM			
4	→	9	→	RANGE	TOLERANCE	LEGION ELECTRONIC & HARDWARE CO., LTD.			LMC 2022.01.05	SCALE	NO			
3	→	8	→	X	±0.30					MAT'L	***			
2	→	7	→	X.X	±0.20					MATERIAL NO.		DRAWING NO.	REV.	
1	→	6	→	X.XX	±0.10					RT-S02-117-A1NBR7		WIF122034		A0
NO	DESCRIPTION	NO	DESCRIPTION	ANGLES	±1°									