

**16A 3Quadrants TRIACs**

**Product Summary**


Symbol	Value	Unit
$I_{T(RMS)}$	16	A
$V_{DRM} V_{RRM}$	600/800	V
$V_{TM}$	1.55	V

**Features**

With high ability to withstand the shock loading of large current, With high commutation performances, 3quadrants products especially recommended for use on inductive load.

**Application**

Washing machine, vacuums, massager, solid state relay, AC Motor speed regulation and so on.

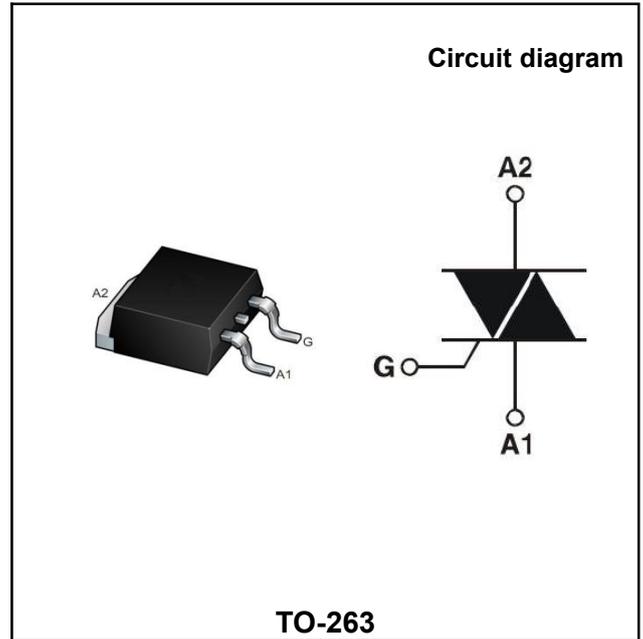

**Order Information**

Part Number	Package	Marking	Packing	Packing Quantity
BTB16Q	TO-263	BTB16 600BW XXXX	Tape	800PCS/Reel

**Absolute maximum ratings (Ta=25°C unless otherwise noted)**

Parameter	Symbol	Value	Unit
Repetitive peak off-state voltage	$V_{DRM}$	600/800	V
Repetitive peak reverse voltage	$V_{RRM}$	600/800	V
RMS on-state current	$I_{T(RMS)}$	16	A
Non repetitive surge peak on-state current (full cycle, F=50Hz)	$I_{TSM}$	160	A
$I^2t$ value for fusing (tp=10ms)	$I^2t$	140	A <sup>2</sup> s
Critical rate of rise of on-state current ( $I_G = 2 \times I_{GT}$ )	$di_T/dt$	I - II - III   50	A/us
Peak gate current	$I_{GM}$	4	A
Average gate power dissipation	$P_G (AV)$	1	W
Junction Temperature	$T_J$	-40~+125	°C
Storage Temperature	$T_{STG}$	-40 ~+150	°C

**Electrical characteristics (TA=25°C, unless otherwise noted)**

Parameter	Symbol	Test Condition	Value		Unit	
			CW	BW		
Gate trigger current	$I_{GT}$	$V_D=12V$ $R_L=33\Omega$ $T_j=25^\circ C$	$\leq 35$	$\leq 50$	<b>mA</b>	
Gate trigger voltage	$V_{GT}$	I-II-III	$\leq 1.3$		<b>V</b>	
Gate non-trigger voltage	$V_{GD}$	$V_D = V_{DRM}$ $T_j=125^\circ C$	$\geq 0.2$		<b>V</b>	
latching current	$I_L$	$I_G = 1.2I_{GT}$	I-III	$\leq 50$	$\leq 70$	<b>mA</b>
			II	$\leq 60$	$\leq 80$	
Holding current	$I_H$	$I_T = 500mA$	$\leq 30$	$\leq 50$	<b>mA</b>	
Critical-rate of rise of commutation voltage	$dV_D/dt$	$V_D=2/3V_{DRM}$ Gate Open $T_j=125^\circ C$	$\geq 500$	$\geq 1000$	<b>V/us</b>	


**STATIC CHARACTERISTICS**

Forward "on" voltage	$V_{TM}$	$I_{TM} = 23A$ $t_p=380us$	$\leq 1.55$	<b>V</b>	
Repetitive Peak Off-State Current	$I_{DRM}$	$V_D=V_{DRM}$ $V_R=V_{RRM}$	$T_j=25^\circ C$	$\leq 5$	<b>UA</b>
Repetitive Peak Reverse Current	$I_{RRM}$		$T_j=125^\circ C$	$\leq 1$	<b>mA</b>

**THERMAL RESISTANCES**

Thermal resistance	$R_{th(j-c)}$	Junction to case(AC)	1.2	<b>°C/W</b>
	$R_{th(j-a)}$	Junction to ambient	45	<b>°C/W</b>

**Ordering Information**

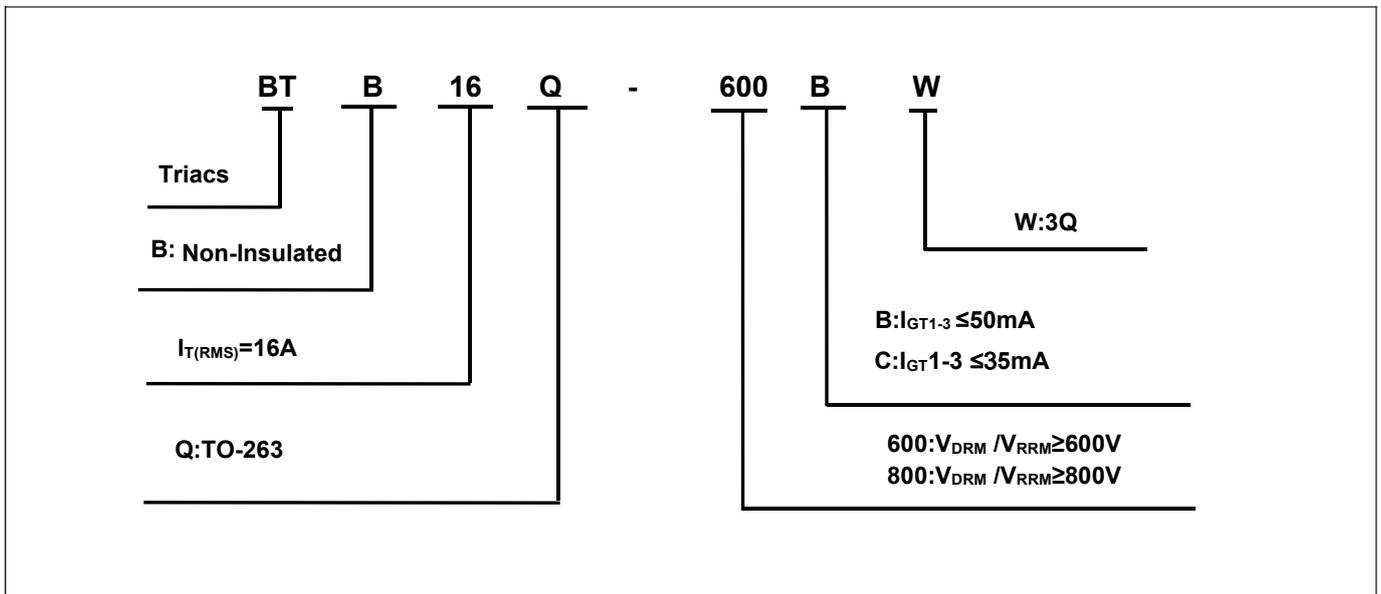

**Typical Characteristics**

FIG.1: Maximum power dissipation versus RMS on-state current (full cycle)

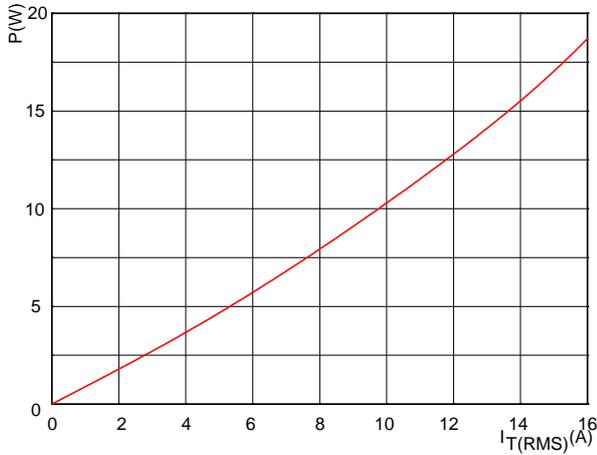


FIG.2: RMS on-state current versus case temperature (full cycle)

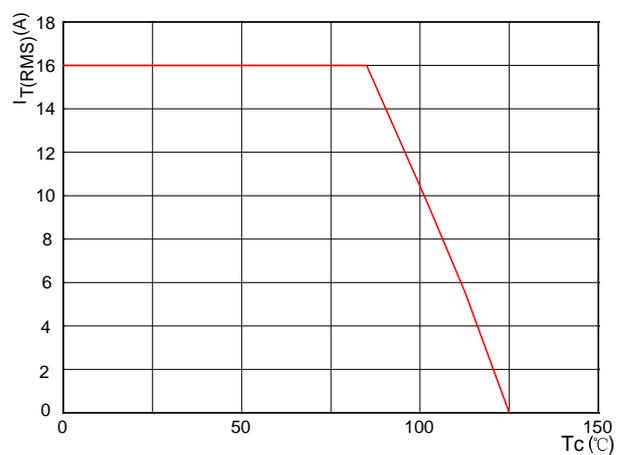


FIG.3: Surge peak on-state current versus number of cycles

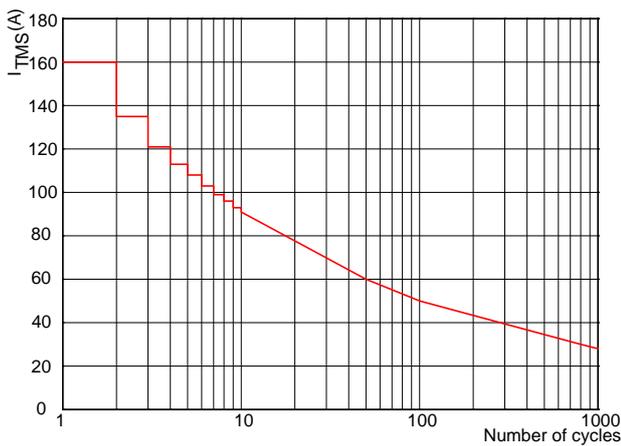


FIG.4: On-state characteristics (maximum values)

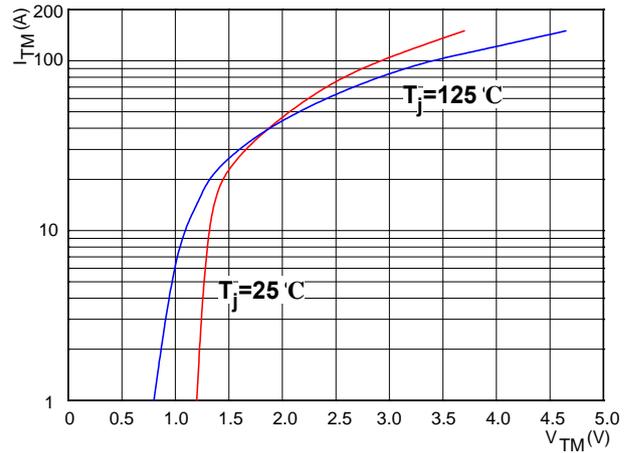


FIG.5: Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 10\text{ms}$


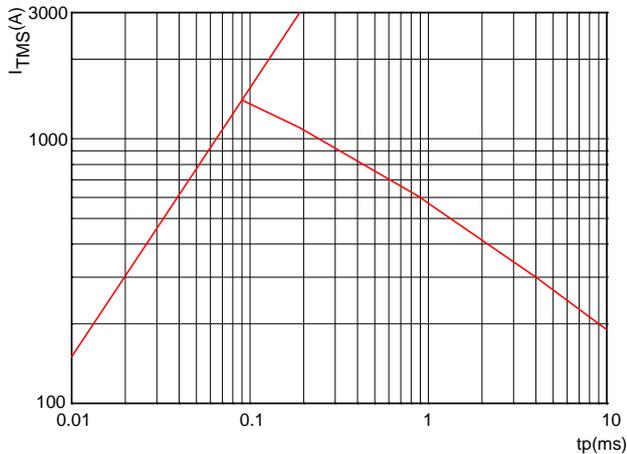


FIG.6: Relative variations of gate trigger current, holding current and latching current versus junction temperature (typical values)



Package Information

TO-263

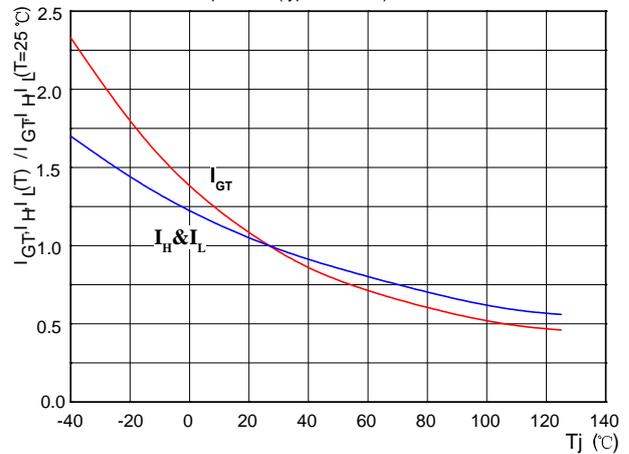