
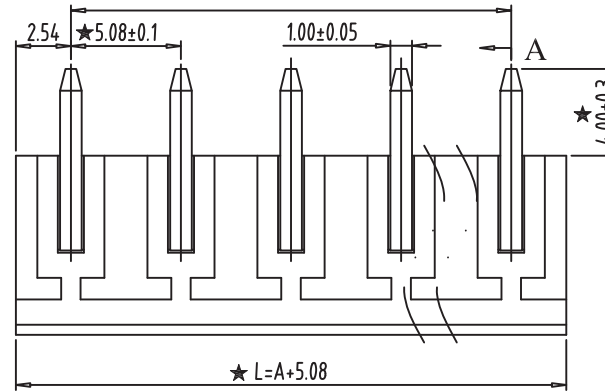


**Kinghelm®**





| REV  | CONTENT | CHK | DATE       |
|------|---------|-----|------------|
| V0.0 | CONTENT |     | 2014/08/19 |

★ A=5.08x(P-1)

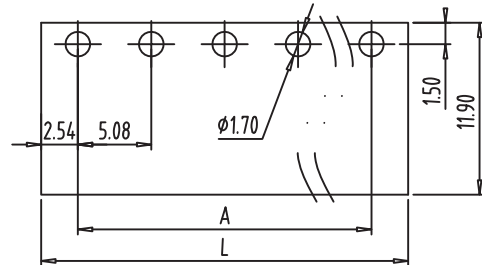

NOTES:

1. Rating:300V 15A ;
2. Insulation Withstands Voltage:  
AC2000V/MIN
3. Insulation Resistance:  
500MΩ or more at DC500V
4. Using Temperature Range: -40°C~+105°C
5. "★" is the important dimension
6. RoHS compliance

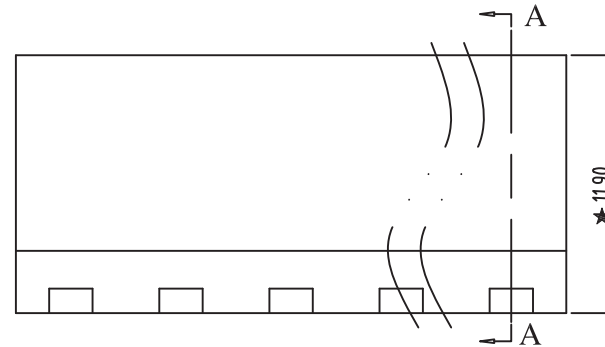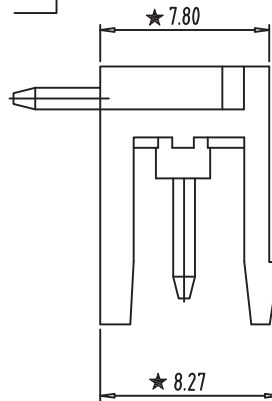

SECTION:A-A

| A | Total Pitch Tolerances |         |         |         |         |          |          |          |          | Nominal dimension range |         |         |         |         |          |          |          |          | $\perp$  |        | $\equiv$ | $—$ // |        |          |          |
|---|------------------------|---------|---------|---------|---------|----------|----------|----------|----------|-------------------------|---------|---------|---------|---------|----------|----------|----------|----------|----------|--------|----------|--------|--------|----------|----------|
|   | in mm                  |         |         |         |         |          |          |          |          | in mm                   |         |         |         |         |          |          |          |          |          |        |          |        |        |          |          |
|   | over 0                 | over 30 | over 53 | over 70 | over 90 | over 115 | over 150 | over 250 | over 350 | over 0                  | over 30 | over 53 | over 70 | over 90 | over 115 | over 150 | over 200 | over 250 | over 320 | over 0 | over 10  | all    | over 0 | over 100 | over 150 |
|   | to 30                  | to 53   | to 70   | to 90   | to 115  | to 150   | to 250   | to 350   | to 500   | to 30                   | to 53   | to 70   | to 90   | to 115  | to 150   | to 200   | to 250   | to 320   | to 10    | to 10  |          | to 0   | to 100 | to 150   |          |
|   | ±0.18                  | ±0.20   | ±0.25   | ±0.3    | ±0.35   | ±0.44    | ±0.60    | ±0.70    | ±0.85    | ±0.20                   | ±0.25   | ±0.30   | ±0.35   | ±0.44   | ±0.55    | ±0.70    | ±0.80    | ±0.90    | 0.2      | 0.3    | 0.3      | 0.2    | 0.3    | 0.5      |          |

| ITEM                 | NAME OF PART | NO. OF PART         | Q'TY       | MATERIAL            | NOTE                     |
|----------------------|--------------|---------------------|------------|---------------------|--------------------------|
| DWG.                 |              | DATE                | 2014/08/19 | SIZE                | A4 UNITS mm SHEET/OF 1/1 |
| CHK.                 |              | DATE                |            | SCALE               | 3:1 2EDG-5.08            |
| APP.                 |              | DATE                |            | NAME                | F400R-XXP-X              |
| 深圳市金航标电子有限公司         |              | www.kinghelm.com.cn |            |                     |                          |
| KH-ZBF4000R-6P-5.08G |              | 0755-83044319       |            | DWGNO. 02-F400RXXPX |                          |