

# Product Specification

XBLW SN74LVC1G00

Single 2-input NAND Gate

WEB | [www.xinboleic.com](http://www.xinboleic.com)



## Description


The SN74LVC1G00 is a single 2-input NAND Gate. Inputs can be driven from either 3.3 V or 5 V devices. This feature allows the use of these devices as translators in mixed 3.3 V and 5 V environments. Schmitt-trigger action at all inputs makes the circuit tolerant of slower input rise and fall times.

## Features

- Wide supply voltage range from 1.65V to 5.5V
- $\pm 24\text{mA}$  output drive ( $V_{CC}=3.0\text{V}$ )
- CMOS low power consumption
- Input accepts voltages up to 5V
- Specified from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- Packaging information: SOT-23-5/SOT-353

## Applications

- AV Receiver
- Embedded PC
- Tablet: Enterprise
- Audio Dock: Portable
- Blu-ray Player and Home Theater
- Video Analytics: Server
- Wireless Headset, Keyboard, and Mouse
- Personal Digital Assistant (PDA)
- MP3 Player/Recorder (Portable Audio)
- Solid State Drive (SSD): Client and Enterprise
- TV: LCD/Digital and High-Definition (HDTV)
- Power: Telecom/Server AC/DC Supply: Single Controller: Analog and Digital

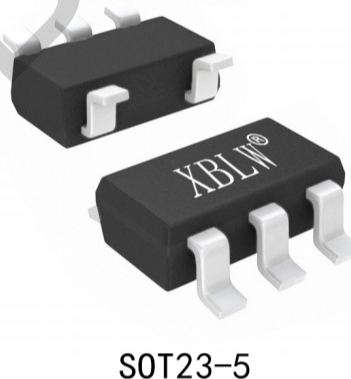

## Ordering Information:

| Product Model        | Package Type | Marking | Packing | Packing Qty  |
|----------------------|--------------|---------|---------|--------------|
| XBLW SN74LVC1G00T235 | SOT-23-5     | AHXX    | Tape    | 3000Pcs/Reel |
| XBLW SN74LVC1G00T353 | SOT-353      | AHXX    | Tape    | 3000Pcs/Reel |

## Block Diagram




Figure 1. Logic symbol




Figure 2. IEC logic symbol





Figure 3. Logic diagram

## Pin Configurations

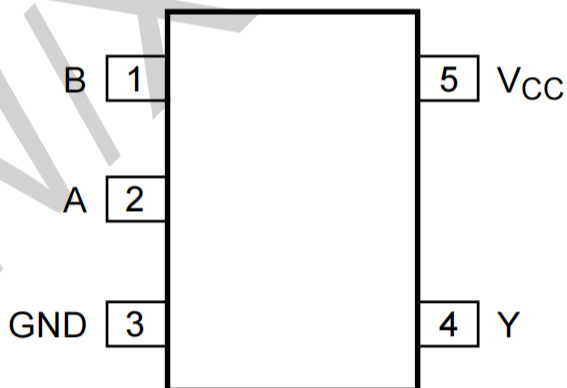

## Pin Description

| Pin No. | Pin Name        | Description    |
|---------|-----------------|----------------|
| 1       | B               | data input     |
| 2       | A               | data input     |
| 3       | GND             | ground (0V)    |
| 4       | Y               | data output    |
| 5       | V <sub>CC</sub> | supply voltage |

## Function Table

| Input |   | Output |
|-------|---|--------|
| A     | B | Y      |
| L     | L | H      |
| L     | H | H      |
| H     | L | H      |
| H     | H | L      |

Note: H=HIGH voltage level; L=LOW voltage level.

## Electrical Parameter

### Absolute Maximum Ratings

(Voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter               | Symbol    | Conditions                   | Min. | Max.         | Unit |
|-------------------------|-----------|------------------------------|------|--------------|------|
| supply voltage          | $V_{CC}$  | -                            | -0.5 | +6.5         | V    |
| input clamping current  | $I_{IK}$  | $V_I < 0V$                   | -50  | -            | mA   |
| input voltage           | $V_I$     | -                            | -0.5 | +6.5         | V    |
| output clamping current | $I_{OK}$  | $V_O > V_{CC}$ or $V_O < 0V$ | -    | ±50          | mA   |
| output voltage          | $V_O$     | Active mode                  | -0.5 | $V_{CC}+0.5$ | V    |
|                         |           | Power-down mode              | -0.5 | +6.5         | V    |
| output current          | $I_O$     | $V_O=0V$ to $V_{CC}$         | -    | ±50          | mA   |
| supply current          | $I_{CC}$  | -                            | -    | 100          | mA   |
| ground current          | $I_{GND}$ | -                            | -100 | -            | mA   |
| storage temperature     | $T_{stg}$ | -                            | -65  | +150         | °C   |
| total power dissipation | $P_{tot}$ | -                            | -    | 250          | mW   |
| soldering temperature   | $T_L$     | 10s                          | 260  |              | °C   |

## Recommended Operating Conditions

| Parameter           | Symbol    | Conditions                   | Min. | Typ. | Max.     | Unit |
|---------------------|-----------|------------------------------|------|------|----------|------|
| supply voltage      | $V_{CC}$  | -                            | 1.65 | -    | 5.5      | V    |
| input voltage       | $V_I$     | -                            | 0    | -    | 5.5      | V    |
| output voltage      | $V_O$     | Active mode                  | 0    | -    | $V_{CC}$ | V    |
|                     |           | Power-down mode; $V_{CC}=0V$ | 0    | -    | 5.5      | V    |
| ambient temperature | $T_{amb}$ | -                            | -40  | -    | +125     | °C   |

## ESD Ratings

| Parameter   |                         | Defintion                                                                                | Vaue  | Unit |
|-------------|-------------------------|------------------------------------------------------------------------------------------|-------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>              | ±2000 | V    |
|             |                         | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup> | ±1000 |      |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

## Electrical Characteristics

### DC Characteristics 1

( $T_{amb} = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter                 | Symbol           | Conditions                                                                                        |                                                        | Min.                  | Typ. | Max.                  | Unit |
|---------------------------|------------------|---------------------------------------------------------------------------------------------------|--------------------------------------------------------|-----------------------|------|-----------------------|------|
| HIGH-level input voltage  | V <sub>IH</sub>  | V <sub>CC</sub> =1.65V to 1.95V                                                                   |                                                        | 0.65× V <sub>CC</sub> | -    | -                     | V    |
|                           |                  | V <sub>CC</sub> =2.3V to 2.7V                                                                     |                                                        | 1.7                   | -    | -                     | V    |
|                           |                  | V <sub>CC</sub> =2.7V to 3.6V                                                                     |                                                        | 2.0                   | -    | -                     | V    |
|                           |                  | V <sub>CC</sub> =4.5V to 5.5V                                                                     |                                                        | 0.7× V <sub>CC</sub>  | -    | -                     | V    |
| LOW-level input voltage   | V <sub>IL</sub>  | V <sub>CC</sub> =1.65V to 1.95V                                                                   |                                                        | -                     | -    | 0.35× V <sub>CC</sub> | V    |
|                           |                  | V <sub>CC</sub> =2.3V to 2.7V                                                                     |                                                        | -                     | -    | 0.7                   | V    |
|                           |                  | V <sub>CC</sub> =2.7V to 3.6V                                                                     |                                                        | -                     | -    | 0.8                   | V    |
|                           |                  | V <sub>CC</sub> =4.5V to 5.5V                                                                     |                                                        | -                     | -    | 0.3× V <sub>CC</sub>  | V    |
| HIGH-level output voltage | V <sub>OH</sub>  | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                               | I <sub>O</sub> =-100uA; V <sub>CC</sub> =1.65V to 5.5V | V <sub>CC</sub> - 0.1 | -    | -                     | V    |
|                           |                  |                                                                                                   | I <sub>O</sub> =-4mA; V <sub>CC</sub> =1.65V           | 1.2                   | -    | -                     | V    |
|                           |                  |                                                                                                   | I <sub>O</sub> =-8mA; V <sub>CC</sub> =2.3V            | 1.9                   | -    | -                     | V    |
|                           |                  |                                                                                                   | I <sub>O</sub> =-12mA; V <sub>CC</sub> =2.7V           | 2.2                   | -    | -                     | V    |
|                           |                  |                                                                                                   | I <sub>O</sub> =-24mA; V <sub>CC</sub> =3.0V           | 2.3                   | -    | -                     | V    |
|                           |                  |                                                                                                   | I <sub>O</sub> =-32mA; V <sub>CC</sub> =4.5V           | 3.8                   | -    | -                     | V    |
| LOW-level output voltage  | V <sub>OL</sub>  | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                               | I <sub>O</sub> =100uA; V <sub>CC</sub> =1.65V to 5.5V  | -                     | -    | 0.1                   | V    |
|                           |                  |                                                                                                   | I <sub>O</sub> =4mA; V <sub>CC</sub> =1.65V            | -                     | -    | 0.45                  | V    |
|                           |                  |                                                                                                   | I <sub>O</sub> =8mA; V <sub>CC</sub> =2.3V             | -                     | -    | 0.3                   | V    |
|                           |                  |                                                                                                   | I <sub>O</sub> =12mA; V <sub>CC</sub> =2.7V            | -                     | -    | 0.4                   | V    |
|                           |                  |                                                                                                   | I <sub>O</sub> =24mA; V <sub>CC</sub> =3.0V            | -                     | -    | 0.55                  | V    |
|                           |                  |                                                                                                   | I <sub>O</sub> =32mA; V <sub>CC</sub> =4.5V            | -                     | -    | 0.55                  | V    |
| input leakage current     | I <sub>I</sub>   | V <sub>I</sub> =5.5V or GND; V <sub>CC</sub> =0V to 5.5V                                          |                                                        | -                     | -    | ±1                    | uA   |
| power-off leakage current | I <sub>OFF</sub> | V <sub>I</sub> or V <sub>O</sub> =5.5V; V <sub>CC</sub> =0V                                       |                                                        | -                     | -    | ±2                    | uA   |
| supply current            | I <sub>CC</sub>  | V <sub>I</sub> =5.5V or GND; I <sub>O</sub> =0A; V <sub>CC</sub> =1.65V to 5.5V                   |                                                        | -                     | -    | 4                     | uA   |
| additional supply current | ΔI <sub>CC</sub> | per pin; V <sub>I</sub> =V <sub>CC</sub> -0.6V; I <sub>O</sub> =0A; V <sub>CC</sub> =2.3V to 5.5V |                                                        | -                     | -    | 500                   | uA   |
| input capacitance         | C <sub>I</sub>   | V <sub>CC</sub> =3.3V; V <sub>I</sub> =GND to V <sub>CC</sub>                                     |                                                        | -                     | 5    | -                     | pF   |

Note: All typical values are measured at  $V_{CC}=3.3\text{V}$  and  $T_{amb}=25^{\circ}\text{C}$ .

## DC Characteristics 2

( $T_{amb} = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter                 | Symbol           | Conditions                                                                                           |                                                           | Min.                     | Typ. | Max.                     | Unit |
|---------------------------|------------------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|--------------------------|------|--------------------------|------|
| HIGH-level input voltage  | V <sub>IH</sub>  | V <sub>CC</sub> =1.65V to 1.95V                                                                      |                                                           | 0.65×<br>V <sub>CC</sub> | -    | -                        | V    |
|                           |                  | V <sub>CC</sub> =2.3V to 2.7V                                                                        |                                                           | 1.7                      | -    | -                        | V    |
|                           |                  | V <sub>CC</sub> =2.7V to 3.6V                                                                        |                                                           | 2.0                      | -    | -                        | V    |
|                           |                  | V <sub>CC</sub> =4.5V to 5.5V                                                                        |                                                           | 0.7×<br>V <sub>CC</sub>  | -    | -                        | V    |
| LOW-level input voltage   | V <sub>IL</sub>  | V <sub>CC</sub> =1.65V to 1.95V                                                                      |                                                           | -                        | -    | 0.35×<br>V <sub>CC</sub> | V    |
|                           |                  | V <sub>CC</sub> =2.3V to 2.7V                                                                        |                                                           | -                        | -    | 0.7                      | V    |
|                           |                  | V <sub>CC</sub> =2.7V to 3.6V                                                                        |                                                           | -                        | -    | 0.8                      | V    |
|                           |                  | V <sub>CC</sub> =4.5V to 5.5V                                                                        |                                                           | -                        | -    | 0.3×<br>V <sub>CC</sub>  | V    |
| HIGH-level output voltage | V <sub>OH</sub>  | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                                  | I <sub>O</sub> =-100uA;<br>V <sub>CC</sub> =1.65V to 5.5V | V <sub>CC</sub> - 0.1    | -    | -                        | V    |
|                           |                  |                                                                                                      | I <sub>O</sub> =-4mA; V <sub>CC</sub> =1.65V              | 0.95                     | -    | -                        | V    |
|                           |                  |                                                                                                      | I <sub>O</sub> =-8mA; V <sub>CC</sub> =2.3V               | 1.7                      | -    | -                        | V    |
|                           |                  |                                                                                                      | I <sub>O</sub> =-12mA; V <sub>CC</sub> =2.7V              | 1.9                      | -    | -                        | V    |
|                           |                  |                                                                                                      | I <sub>O</sub> =-24mA; V <sub>CC</sub> =3.0V              | 2.0                      | -    | -                        | V    |
|                           |                  |                                                                                                      | I <sub>O</sub> =-32mA; V <sub>CC</sub> =4.5V              | 3.4                      | -    | -                        | V    |
| LOW-level output voltage  | V <sub>OL</sub>  | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                                  | I <sub>O</sub> =100uA;<br>V <sub>CC</sub> =1.65V to 5.5V  | -                        | -    | 0.1                      | V    |
|                           |                  |                                                                                                      | I <sub>O</sub> =4mA; V <sub>CC</sub> =1.65V               | -                        | -    | 0.7                      | V    |
|                           |                  |                                                                                                      | I <sub>O</sub> =8mA; V <sub>CC</sub> =2.3V                | -                        | -    | 0.45                     | V    |
|                           |                  |                                                                                                      | I <sub>O</sub> =12mA; V <sub>CC</sub> =2.7V               | -                        | -    | 0.6                      | V    |
|                           |                  |                                                                                                      | I <sub>O</sub> =24mA; V <sub>CC</sub> =3.0V               | -                        | -    | 0.8                      | V    |
|                           |                  |                                                                                                      | I <sub>O</sub> =32mA; V <sub>CC</sub> =4.5V               | -                        | -    | 0.8                      | V    |
| input leakage current     | I <sub>I</sub>   | V <sub>I</sub> =5.5V or GND;<br>V <sub>CC</sub> =0V to 5.5V                                          |                                                           | -                        | -    | ±1                       | uA   |
| power-off leakage current | I <sub>OFF</sub> | V <sub>I</sub> or V <sub>O</sub> =5.5V; V <sub>CC</sub> =0V                                          |                                                           | -                        | -    | ±2                       | uA   |
| supply current            | I <sub>CC</sub>  | V <sub>I</sub> =5.5V or GND; I <sub>O</sub> =0A;<br>V <sub>CC</sub> =1.65V to 5.5V                   |                                                           | -                        | -    | 4                        | uA   |
| additional supply current | ΔI <sub>CC</sub> | per pin; V <sub>I</sub> =V <sub>CC</sub> -0.6V; I <sub>O</sub> =0A;<br>V <sub>CC</sub> =2.3V to 5.5V |                                                           | -                        | -    | 500                      | uA   |

### AC Characteristics 1

( $T_{amb} = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter                   | Symbol           | Conditions   |                                 | Min. | Typ. <sup>[1]</sup> | Max. | Unit |
|-----------------------------|------------------|--------------|---------------------------------|------|---------------------|------|------|
| A, B to Y propagation delay | t <sub>PHL</sub> | see Figure 5 | V <sub>CC</sub> =1.65V to 1.95V | -    | 12.5                | 18.8 | ns   |
|                             |                  |              | V <sub>CC</sub> =2.3V to 2.7V   | -    | 10.5                | 15.8 | ns   |
|                             |                  |              | V <sub>CC</sub> =2.7V           | -    | 10                  | 15   | ns   |
|                             |                  |              | V <sub>CC</sub> =3.0V to 3.6V   | -    | 9.5                 | 14.3 | ns   |
|                             |                  |              | V <sub>CC</sub> =4.5V to 5.5V   | -    | 9                   | 13.5 | ns   |
| A, B to Y propagation delay | t <sub>PLH</sub> | see Figure 5 | V <sub>CC</sub> =1.65V to 1.95V | -    | 14                  | 21   | ns   |
|                             |                  |              | V <sub>CC</sub> =2.3V to 2.7V   | -    | 10                  | 15   | ns   |
|                             |                  |              | V <sub>CC</sub> =2.7V           | -    | 9.5                 | 14.3 | ns   |
|                             |                  |              | V <sub>CC</sub> =3.0V to 3.6V   | -    | 8.5                 | 12.8 | ns   |
|                             |                  |              | V <sub>CC</sub> =4.5V to 5.5V   | -    | 7.5                 | 11.3 | ns   |

Note:

[1] Typical values are measured at  $T_{amb}=25^{\circ}\text{C}$  and  $V_{CC}=1.8\text{V}$ ,  $2.5\text{V}$ ,  $2.7\text{V}$ ,  $3.3\text{V}$  and  $5.0\text{V}$  respectively.

[2] Typical values are measured at  $V_{CC}=3.3\text{V}$  or  $5\text{V}$ .

[3]  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu\text{W}$ ).

$P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_o)$  where:

$f_i$  = input frequency in MHz;

$f_o$  = output frequency in MHz;

$C_L$  = output load capacitance in pF;

$V_{CC}$  = supply voltage in V;

$N$  = number of inputs switching;

$\sum (C_L \times V_{CC}^2 \times f_o)$  = sum of outputs.

### AC Characteristics 2

( $T_{amb} = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter                   | Symbol    | Conditions   | Min.                     | Typ. | Max. | Unit |    |
|-----------------------------|-----------|--------------|--------------------------|------|------|------|----|
| A, B to Y propagation delay | $t_{PHL}$ | see Figure 5 | $V_{CC}$ =1.65V to 1.95V | -    | -    | 20.8 | ns |
|                             |           |              | $V_{CC}$ =2.3V to 2.7V   | -    | -    | 17.8 | ns |
|                             |           |              | $V_{CC}$ =2.7V           | -    | -    | 17   | ns |
|                             |           |              | $V_{CC}$ =3.0V to 3.6V   | -    | -    | 16.3 | ns |
|                             |           |              | $V_{CC}$ =4.5V to 5.5V   | -    | -    | 15.5 | ns |
| A, B to Y propagation delay | $t_{PLH}$ | see Figure 5 | $V_{CC}$ =1.65V to 1.95V | -    | -    | 23   | ns |
|                             |           |              | $V_{CC}$ =2.3V to 2.7V   | -    | -    | 17   | ns |
|                             |           |              | $V_{CC}$ =2.7V           | -    | -    | 16.3 | ns |
|                             |           |              | $V_{CC}$ =3.0V to 3.6V   | -    | -    | 14.8 | ns |
|                             |           |              | $V_{CC}$ =4.5V to 5.5V   | -    | -    | 13.3 | ns |

Note:

[1] Typical values are measured at  $T_{amb}=25^{\circ}\text{C}$  and  $V_{CC}=1.8\text{V}$ ,  $2.5\text{V}$ ,  $2.7\text{V}$ ,  $3.3\text{V}$  and  $5.0\text{V}$  respectively.

[2] Typical values are measured at  $V_{CC}=3.3\text{V}$  or  $5\text{V}$ .

## Testing Circuit

### AC Testing Circuit

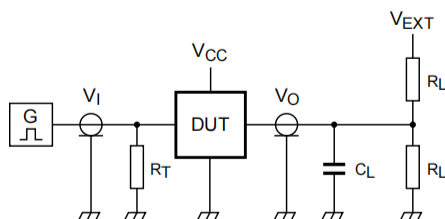


Figure 4. Test circuit for measuring switching times

Definitions for test circuit:

$R_L$ =Load resistance.

$C_L$ =Load capacitance including jig and probe capacitance.

$R_T$ =Termination resistance; should be equal to the output impedance  $Z_o$  of the pulse generator.

$V_{EXT}$ =External voltage for measuring switching times.

### AC Testing Waveforms

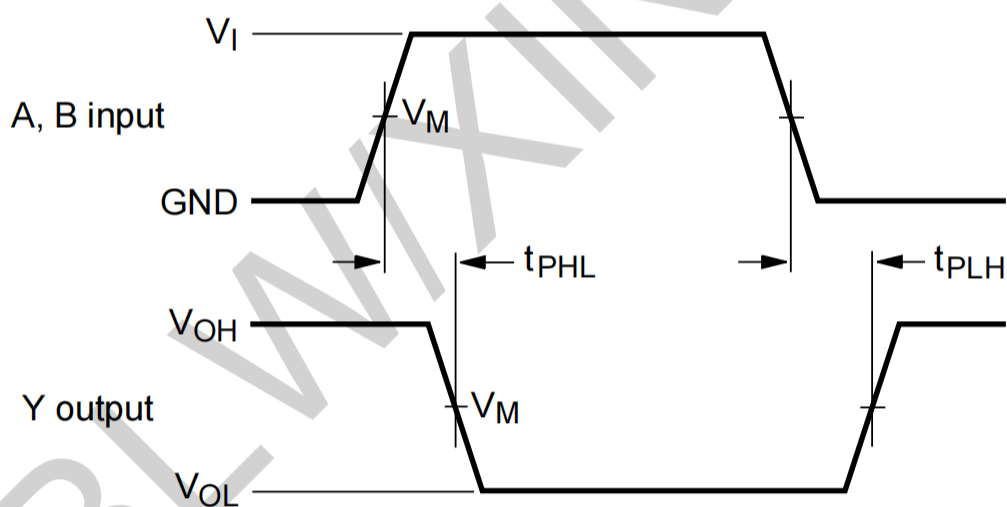


Figure 5. The input A, B to output Y propagation delays



### Measurement Points

| Supply voltage | Input               | Output              |
|----------------|---------------------|---------------------|
| $V_{CC}$       | $V_M$               | $V_M$               |
| 1.65V to 1.95V | $0.5 \times V_{CC}$ | $0.5 \times V_{CC}$ |
| 2.3V to 2.7V   | $0.5 \times V_{CC}$ | $0.5 \times V_{CC}$ |
| 2.7V           | 1.5V                | 1.5V                |
| 3.0V to 3.6V   | 1.5V                | 1.5V                |
| 4.5V to 5.5V   | $0.5 \times V_{CC}$ | $0.5 \times V_{CC}$ |


### Test Data

| Supply voltage | Input    |             | Load  |              | $V_{EXT}$          |
|----------------|----------|-------------|-------|--------------|--------------------|
| $V_{CC}$       | $V_I$    | $t_r = t_f$ | $C_L$ | $R_L$        | $t_{PLH}, t_{PHL}$ |
| 1.65V to 1.95V | $V_{CC}$ | $\leq 3ns$  | 30pF  | 1k $\Omega$  | open               |
| 2.3V to 2.7V   | $V_{CC}$ | $\leq 3ns$  | 30pF  | 500 $\Omega$ | open               |
| 2.7V           | 2.7V     | $\leq 3ns$  | 50pF  | 500 $\Omega$ | open               |
| 3.0V to 3.6V   | 2.7V     | $\leq 3ns$  | 50pF  | 500 $\Omega$ | open               |
| 4.5V to 5.5V   | $V_{CC}$ | $\leq 3ns$  | 50pF  | 500 $\Omega$ | open               |

## Package Information


- SOT23-5

| SIZE<br>SYMBOL | Dimensions In Millimeters |          | SIZE<br>SYMBOL | Dimensions In Inches |          |
|----------------|---------------------------|----------|----------------|----------------------|----------|
|                | MIN (mm)                  | MAX (mm) |                | MIN (in)             | MAX (in) |
| A              | 1.050                     | 1.250    | A              | 0.041                | 0.049    |
| A1             | 0.000                     | 0.100    | A1             | 0.000                | 0.004    |
| A2             | 1.050                     | 1.150    | A2             | 0.041                | 0.045    |
| b              | 0.300                     | 0.500    | b              | 0.012                | 0.020    |
| c              | 0.100                     | 0.200    | c              | 0.004                | 0.008    |
| D              | 2.820                     | 3.020    | D1             | 0.111                | 0.119    |
| E              | 1.500                     | 1.700    | E              | 0.059                | 0.067    |
| E1             | 2.650                     | 2.950    | E1             | 0.104                | 0.116    |
| e              | 0.95 (BSC)                |          | e              | 0.037 (BSC)          |          |
| E1             | 1.800                     | 2.000    | E1             | 0.071                | 0.079    |
| L              | 0.300                     | 0.600    | L              | 0.012                | 0.024    |
| θ              | 0°                        | 8°       | θ              | 0°                   | 8°       |

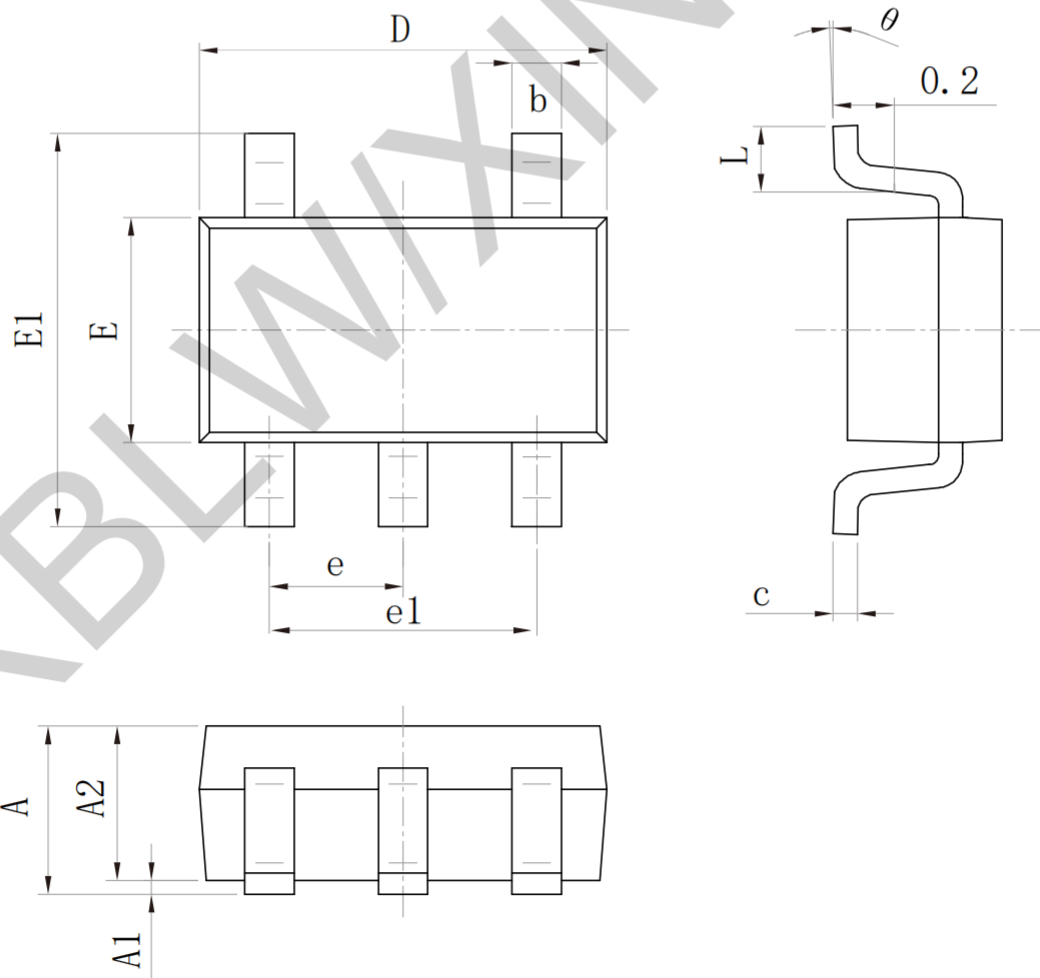

• SOT-353

| Size<br>Symbol | Dimensions In Millimeters |          | Size<br>Symbol | Dimensions In Inches |          |
|----------------|---------------------------|----------|----------------|----------------------|----------|
|                | Min (mm)                  | Max (mm) |                | Min (in)             | Max (in) |
| A              | 0.900                     | 1.100    | A              | 0.035                | 0.043    |
| A1             | 0.000                     | 0.100    | A1             | 0.000                | 0.004    |
| A2             | 0.900                     | 1.000    | A2             | 0.035                | 0.039    |
| b              | 0.150                     | 0.350    | b              | 0.006                | 0.014    |
| c              | 0.080                     | 0.150    | C              | 0.003                | 0.006    |
| D              | 2.000                     | 2.200    | D              | 0.079                | 0.087    |
| E              | 1.150                     | 1.350    | E              | 0.045                | 0.053    |
| E1             | 2.150                     | 2.450    | E1             | 0.085                | 0.096    |
| e              | 0.650 (TYP)               |          | e              | 0.026 (TYP)          |          |
| e1             | 1.200                     | 1.400    | e1             | 0.047                | 0.055    |
| L              | 0.525 (REF)               |          | L              | 0.021 (REF)          |          |
| L1             | 0.260                     | 0.460    | L1             | 0.010                | 0.018    |
| θ              | 0°                        | 8°       | θ              | 0°                   | 8°       |

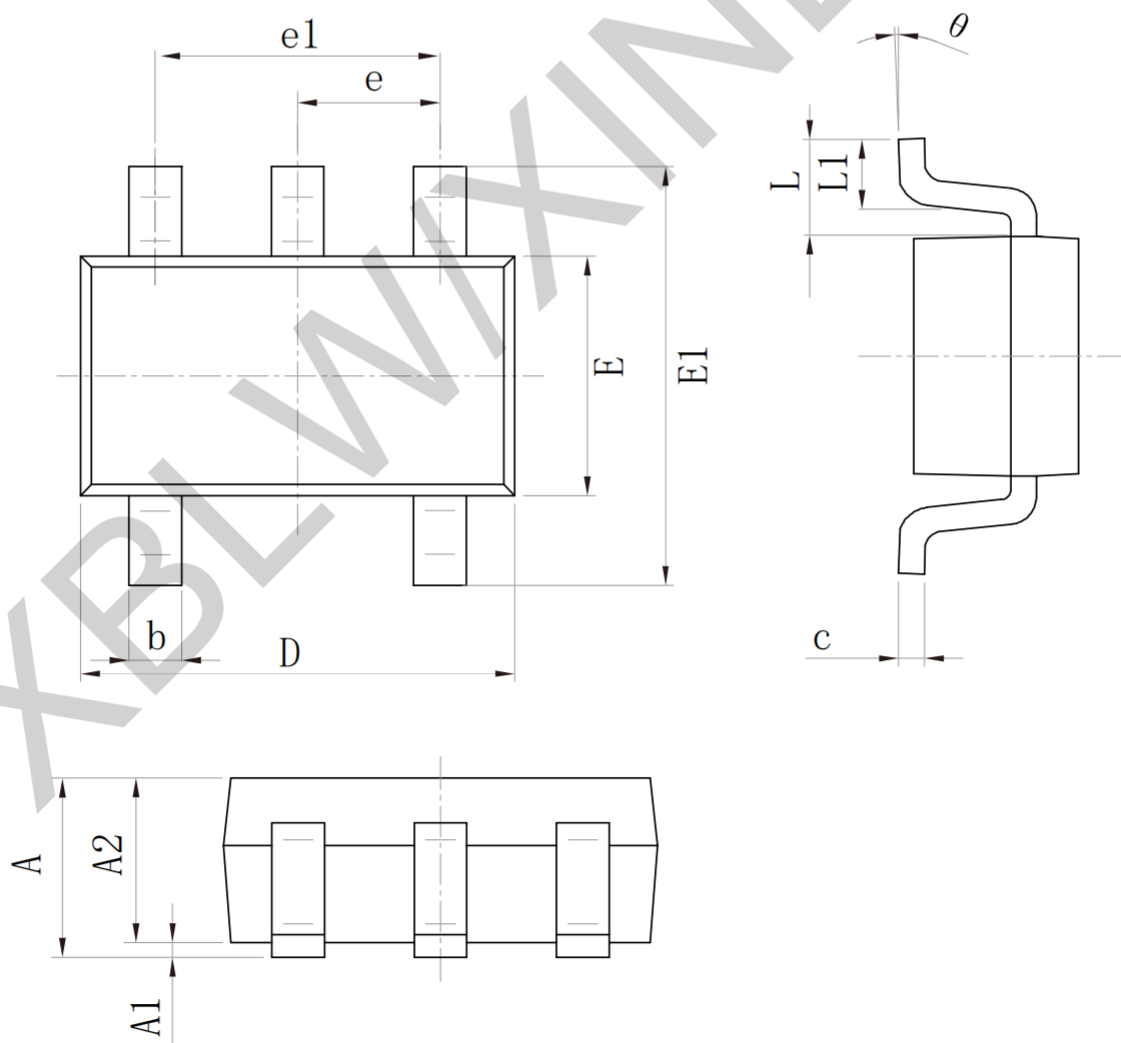

## Statement:

- XBLW reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using XBLW products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- XBLW products have not been licensed for life support, military, and aerospace applications, and therefore XBLW is not responsible for any consequences arising from the use of this product in these areas.
- If any or all XBLW products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all XBLW products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- XBLW documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. XBLW assumes no responsibility or liability for altered documents.
- XBLW is committed to becoming the preferred semiconductor brand for customers, and XBLW will strive to provide customers with better performance and better quality products.