


RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

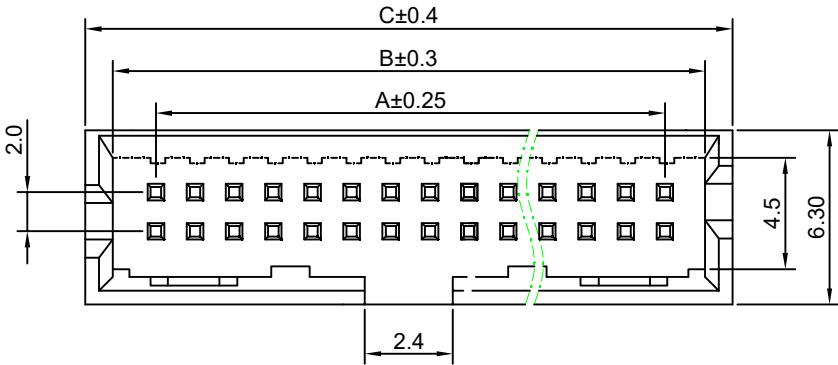

SPECIFICATIONS

- Current rating: 2A
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator Material:PA6T (UL 94V-0) Black
Contact Material:Copper Alloy
Plating:Matte Tin or gold plated over Nickel
Mate with PM200 /I200 series

Ordering Code:



BH200V-XX-H64

1 2
1.序列号


2.Pin位数: 2x03=06P

No.of PIN/ROW	Dimension				
	A	B	C	D	E
2x02	2.00	4.85	6.65	5.00	-
2x03	4.00	6.85	8.65	7.00	-
2x04	6.00	8.85	10.65	9.00	-
2x05	8.00	10.85	12.65	11.00	-
2x06	10.00	12.85	14.65	13.00	-
2x07	12.00	14.85	16.65	15.00	8.00
2x08	14.00	16.85	18.65	17.00	10.00
2x09	16.00	18.85	20.65	19.00	12.00
2x10	18.00	20.85	22.65	21.00	14.00
2x12	20.00	22.85	24.65	23.00	16.00
2x11	22.00	24.85	26.65	25.00	18.00
2x13	24.00	26.85	28.65	27.00	20.00
2x14	26.00	28.85	30.65	29.00	22.00
2x15	28.00	30.85	32.65	31.00	24.00
2x16	30.00	32.85	34.65	33.00	26.00
2x17	32.00	34.85	36.65	35.00	28.00
2x18	34.00	36.85	38.65	37.00	30.00
2x19	36.00	38.85	40.65	39.00	32.00
2x20	38.00	40.85	42.65	41.00	34.00
2x21	40.00	42.85	44.65	43.00	36.00
2x22	42.00	44.82	46.65	45.00	38.00
2x23	44.00	46.85	48.65	47.00	40.00
2x24	46.00	48.85	50.65	49.00	42.00
2x25	48.00	50.85	52.65	51.00	44.00

此图标部分为2*07P以上有窗口
2*07P以下无窗口

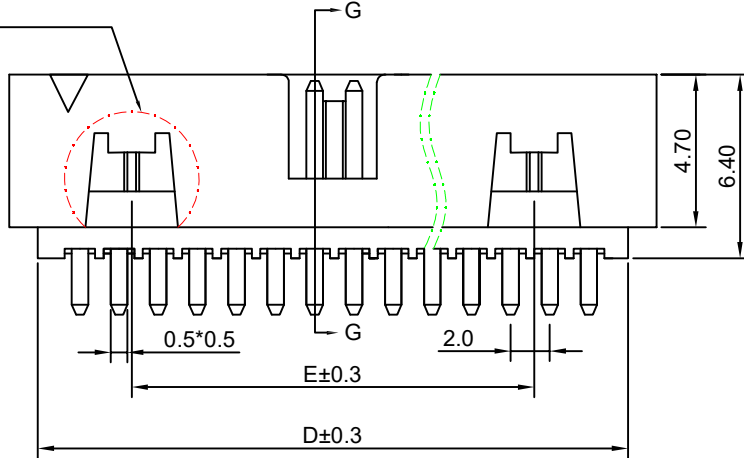

SECTION G-G

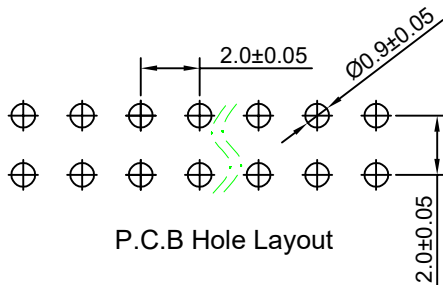

P.C.B Hole Layout

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF XFCN AND SHALL
NOT BE REPRODUCED, COPIED OR CUED IN
ANY MANNER WITHOUT THE PRIOR
WRITTEN CONSENT OF XFCN

PART NO: BH200V-XX-H64		XFCN 兴飞连接器					
TITLE: MLX筒牛 2.00mm XXP 黑色 180°		0769-82001899					
		www.xfconn.com					
		DWG NO:					
APPD		Chen ZhiQiang					
N	CHKD		Liu Wei		VIEW		
	DRAW		Chen HongJiang		SCALE	SHEET	REV
	DATE		2024.08.21		NONE	1/1	A1