
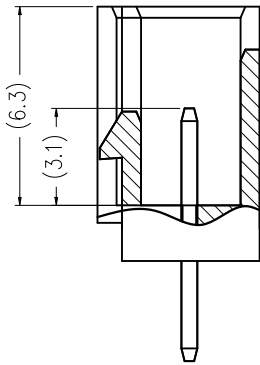


版次	变更摘要	日期
0	新产品发行	2019/07/20
1	料号变更	2024/09/26

序号	品名	材质
①	HY2.0直针WTB胶芯	PA66 UL94V-0 米色 白色
②	HY2.0直针WTB端子	铜合金/表面镀锡

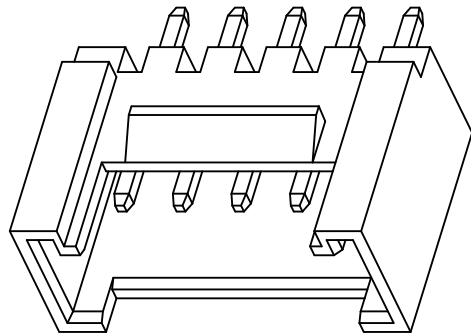

SECTION A-A


CKT	A	B	CKT	A	B
2	2.0	6.0	12	22.0	26.0
3	4.0	8.0	13	24.0	28.0
4	6.0	10.0	14	26.0	30.0
5	8.0	12.0	15	28.0	32.0
6	10.0	14.0	16	30.0	34.0
7	12.0	16.0	17	32.0	36.0
8	14.0	18.0	18	34.0	38.0
9	16.0	20.0	19	36.0	40.0
10	18.0	22.0	20	38.0	42.0
11	20.0	24.0			

ZGWD 浙江温达电子有限公司
ZHEJIANG WENDA ELECTRONICS CO., LTD


品名 (TITLE)	HY2.0直针WTB	制图 (DR)	ANLAN
料号 (DWG.NO)	WT200Y1V-***-***	校对 (CHKD)	田峰
比例 (SCALE)	单位 (UNITS)	审核 (APPD)	黄志明
	mm	张数 (SHEET)	1 OF 1
		SIZE	A4
		REV	A



一般公差 (TOLERANCE)
X. ±.50 .XX ±.10
X. ±.20 .XXX ±.05
ANGLES ±1°


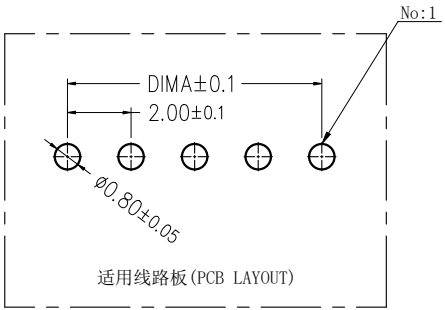


适用线路板 (PCB LAYOUT)

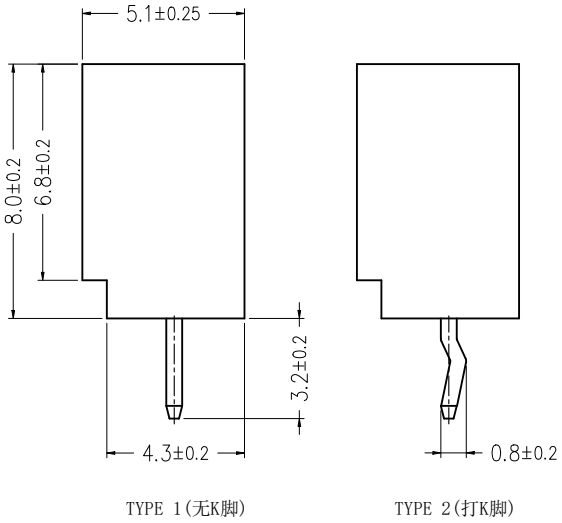

TYPE 1 (无K脚)

TYPE 2 (打K脚)

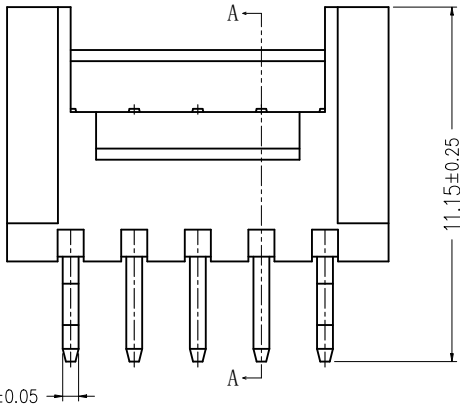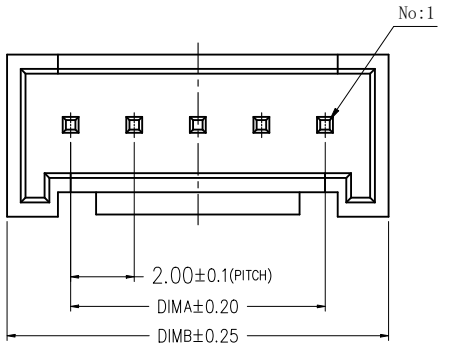

技术指标 (Technical Index):

- 温度范围 (Temperature range): -25° C ~ +85° C.
- 额定电压 (Rated voltage): 200V, AC.
- 额定电流 (Rated current): 2.0A AC, DC.
- 接触电阻 (Contact resistance): ≤25mΩ.
- 耐压值 (Withstanding voltage): 500V AC/minute.
- 绝缘电阻 (Insulation resistance): ≥1000MΩ.
- 产品料号 (Product material No.):

WT200Y1V-*** * -***
NO OF CKT (产品PIN数) 流水码
Plating (电镀方式) Packing (包装方式)
1: 端子全金1U P: PE袋装
3: 端子全亮锡 B: 盒装