

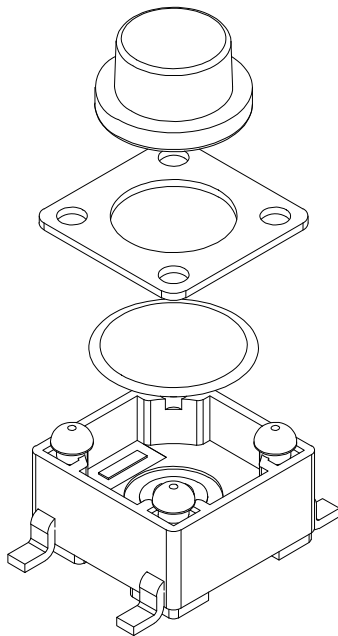






REV.	ECN NO OR DESCRIPTION	DRAW	DATE



← E
← D
← C
← B
← A

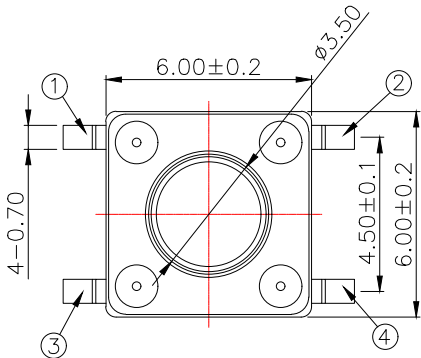

CIRCUIT DIAGRAM

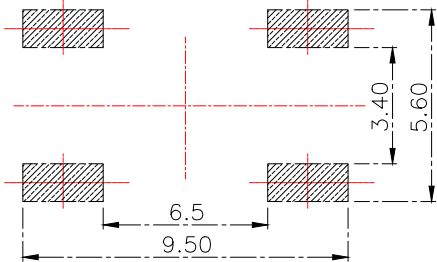

PCB.WELDING DRAWING

主要技术参数、性能
The Main Thchnology Performance

额定电流、电压 Rate voltage,current	50mA DC12V
接触电阻 Contact resistance	≤100mΩ
按力 Operating force	±50gf
行程 travel	0.2±0.1mm
绝缘电阻 Insulated resistance	≥100MΩ
介电强度 Dielectric strength	≥250VAC/1min

Part No	H(高度)	Part No	H(高度)
SMG-01T-H043A0	4.30	SMG-01T-H075A0	7.50
SMG-01T-H045A0	4.50	SMG-01T-H080A0	8.00
SMG-01T-H050A0	5.00	SMG-01T-H085A0	8.50
SMG-01T-H055A0	5.50	SMG-01T-H090A0	9.00
SMG-01T-H060A0	6.00	SMG-01T-H095A0	9.50
SMG-01T-H065A0	6.50	SMG-01T-H100A0	10.0
SMG-01T-H070A0	7.00		

E	按钮	PPA	1	黑色
D	盖板	铁盖板	1	镀铜锡
C	弹片	不锈钢	1	镀银
B	本体	PPA	1	黑色
A	卡件	黄铜	1	镀银
项目 ITEM	名称 DESCRIPTION	材质 MATERIAL	数量 QTY	表面处理/颜色 FINISH/COLOR

GENERAL TOLERANCES (UNLESS SOECIFIED)	SCALE: 1:1 UNIT: MM	TITLE:	PART NO.	
		6*6*X贴片 250GF	SMG-01T-HXXXXA0	
		 SM switch Co.,Ltd. 无锡斯茂科技有限公司 ISO 9001/ISO14001		
DISTANCE	ANGLE	Matthew		
X. ±0.30	X.° ±2.0°	Benjamin		
.X ±0.20	.X° ±1.0°	Michael		
.XX ±0.15	.XX° ±0.5°	/		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	Alexander	 THIRD ANGLE PRDJECTION		SHEET NO 1 OF 1
	Sophia			