

3D View

NOTES:

1:MATERIAL

1-1: SUS-304 THICKNE=0.10MM

2:SPECIFICATIONS

2-1: RATED CURRENT: 1.0A

2-2: VOLTAGE RATING: 1.5V

2-3: CONTACT RESISTANCE: 80mΩ/MAX

2-4: WELDING THRUST: >3KG




2-5: OPERATING TEMPERATURE: -40°C~+85°C

3:DURABILITY: 1500 CYCLES

4:SALT SPRAY TIME: 24H


5:ELECTROPLATE: THE NICKEL-PLATED SUBSTRATE IS 50u" MIN

6:REQUIREMENTS

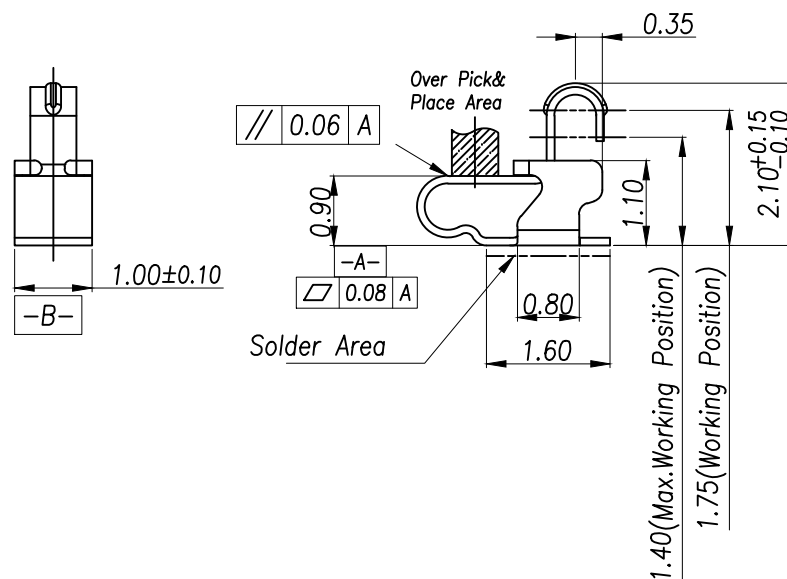6-1:TERMINAL TO EAT FULL TIN,NOTPEELING,
WELDING OBVIOUS COLOR AND OTHED ADVERSE6-2:ROHS.REACH.HF HALOGER ADVERSE OF DOMESTIC
AND INTERNATIONAL ENVIRONMNTAL REQUIREMENTS(For Reference Only)
Stated At Compression

METAL MASK T=0.08

TOLERANCE:±0.05MM (FOR REFERENCE ONLY)

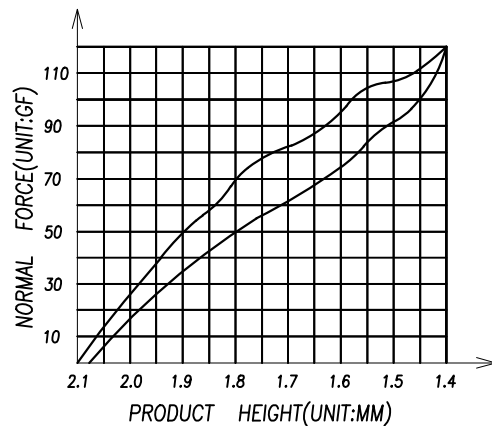GENERAL TOLERANCES
(UNLESS SOECIFIED)

DISTANCE	ANGLE
X. ±0.30	X.* ±2.0°
.X ±0.20	.X* ±1.0°
.XX ±0.15	.XX* ±0.5°

DRAFT WHERE APPLICABLE APPROVED BY
MUST REMAIN
WITHIN DIMENSIONSSCALE: 1:1
UNIT: MM

DRAWN BY

LUDAH

CHEVKED BY

/

LUJIAH



瑾珩精密

TITLE: 天线弹片

L2.50*W1.00*H2.10

PART NO.

TP-T0-2111



MANUFACTURE DWG

SCALE



N:A

SHEET

1:2

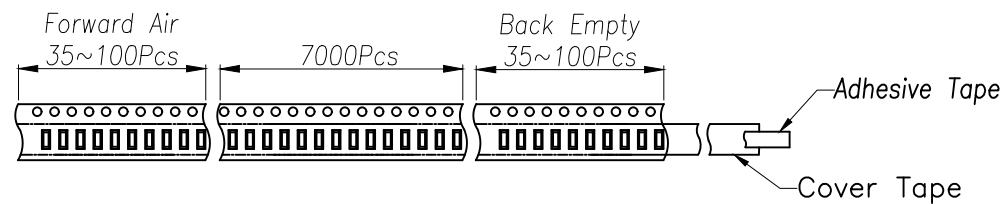
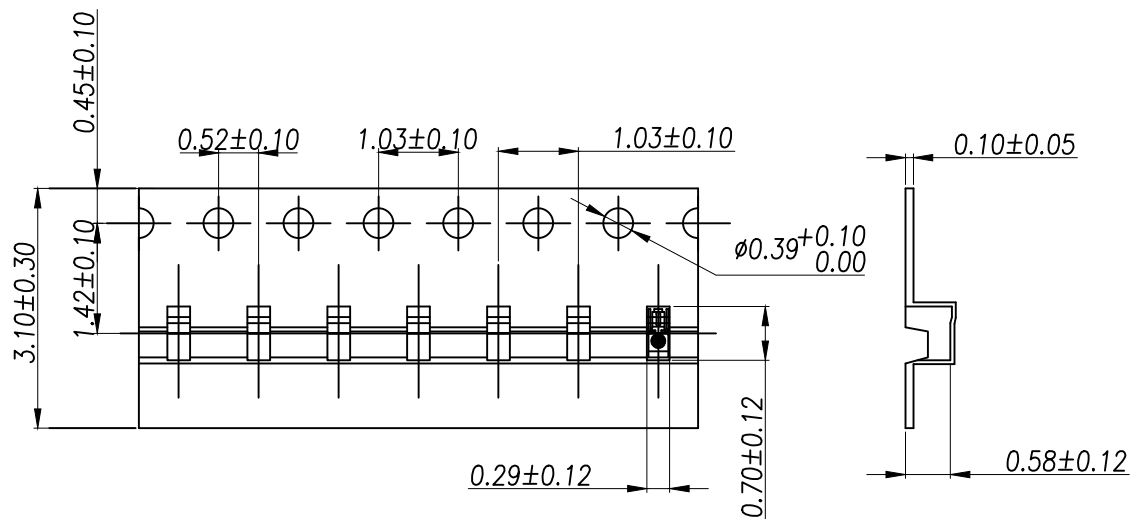


Customer To Use Direction → Pull Out Direction (出料方向) →

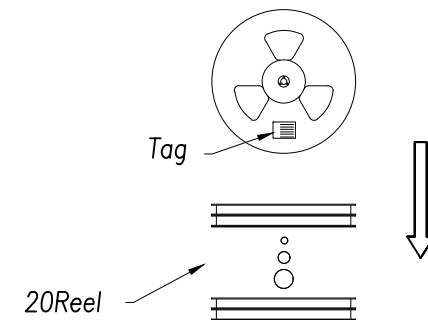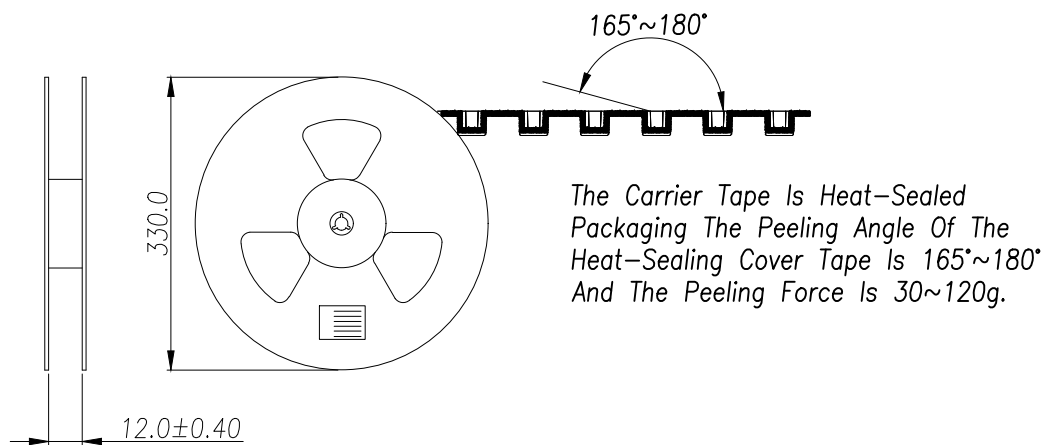

Carton Size
290*330*4 K3K

Carton Size
345*345*360 K=K

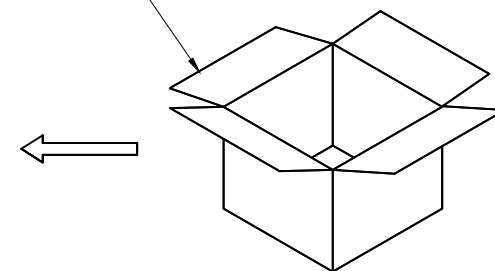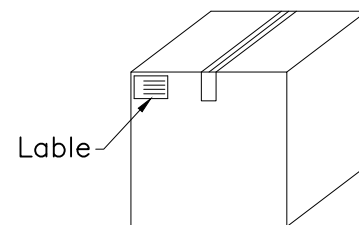

GENERAL TOLERANCES (UNLESS SOECIFIED)		SCALE: 1:1 UNIT: MM			
DISTANCE	ANGLE	DRAWN BY			
X. ±0.30	X.* ±2.0°	LUDAH		TITLE: 天线排片 L2.50*W1.00*H2.10	
.X ±0.20	.X* ±1.0°	CHEVKED BY			
.XX ±0.15	.XX* ±0.5°	/		MANUFACTURE DWG	
DRAFT WHERE APPLICABLE APPROVED BY MUST REMAIN WITHIN DIMENSIONS					
			LUJIAH	PART NO. TP-T0-2111	
				SCALE	SHEET
				N:A	2:2