

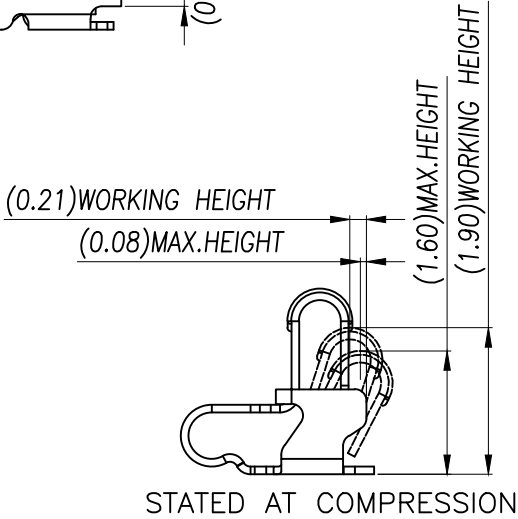
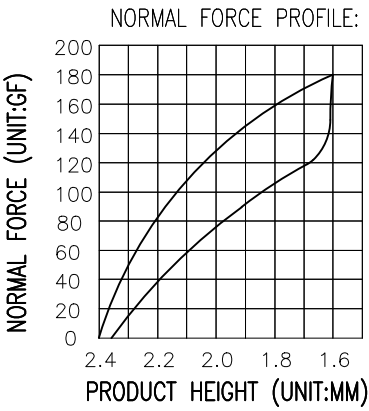




- NOTES
- (1) MATERIAL: SUS-304 THICKNE=0.10mm
  - (2) PRODUCT SPECIFICATIONS:
    - 2-1: RATED CURRENT: 1.0A
    - 2-2: VOLTAGE RATING: 1.50V
    - 2-3: CONTACT RESISTANCE: 80mΩ/MAX
    - 2-4: WELDING THRUST: >3KG
    - 2-5: OPERATING TEMPERATURE: -40°C~+85°C
    - 2-6: DURABILITY: 1500 CYCLES
  - (3): SALT SPRAY: 24 HOURS
  - (4): FINISH: 50u"Min NICKEL UNDERPLATING OVER ALL.
  - (5): REQUIREMENTS
    - 5-1: TERMINAL TO EAT FULL TIN, NOT PEELING
    - WELDING OBVIOUS COLOR AND OTHER ADVERSE
    - 5-2: ROHS, REACH, HF HALOGEN ADVERSE OF DOMESTIC AND INTERNATIONAL ENVIRONMENTAL REQUIREMENTS

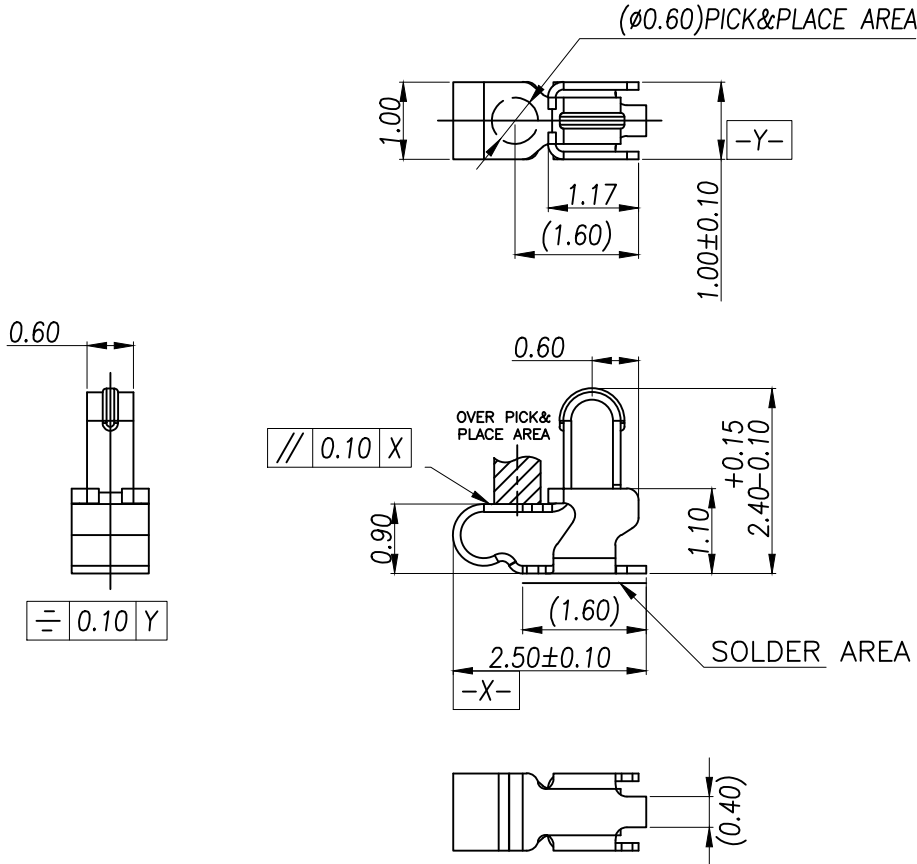


RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE ±0.05

|                                          |                                                                        |                                                           |                 |
|------------------------------------------|------------------------------------------------------------------------|-----------------------------------------------------------|-----------------|
| GENERAL TOLERANCES<br>(UNLESS SOECIFIED) | SCALE: 1:1<br>UNIT: MM                                                 |                                                           |                 |
|                                          | DRAWN BY<br>LUDAH                                                      |                                                           |                 |
|                                          | CHEVKED BY<br>/                                                        | TITLE: 天线弹片<br>H2.40 ANTENNA SPRING<br>TERMINAL, T=0.10MM |                 |
|                                          | DRAFT WHERE APPLICABLE APPROVED BY<br>MUST REMAIN<br>WITHIN DIMENSIONS | PART NO.<br>TP-T0-2411                                    | MANUFACTURE DWG |
|                                          |                                                                        | SCALE<br>N:A                                              | SHEET<br>1:2    |





| CONN. QTY./REEL | REEL QTY./CARTON | CONN. QTY./CARTON |
|-----------------|------------------|-------------------|
| 6000            | 20               | 120,000           |

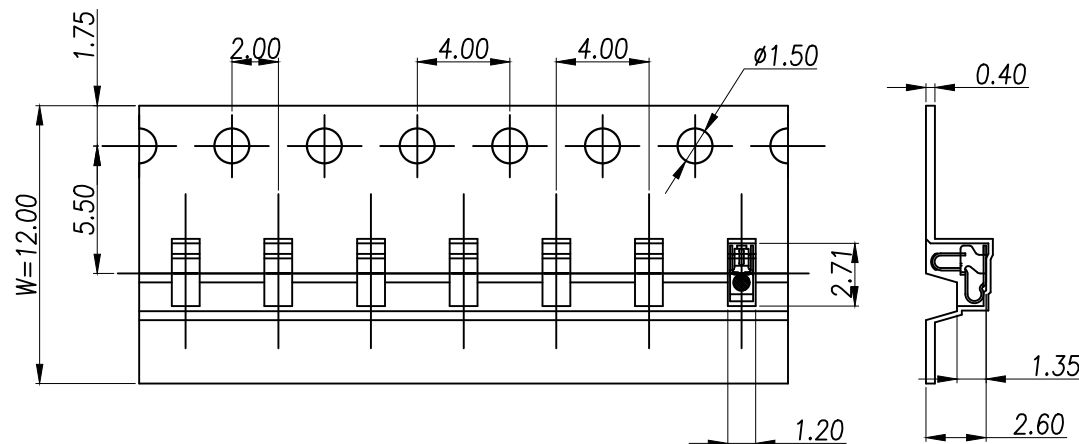

TOTAL  
20LAYERS

PRODUCT PACKAGING DIRECTION  
CUSTOMER TO USE DIRECTION

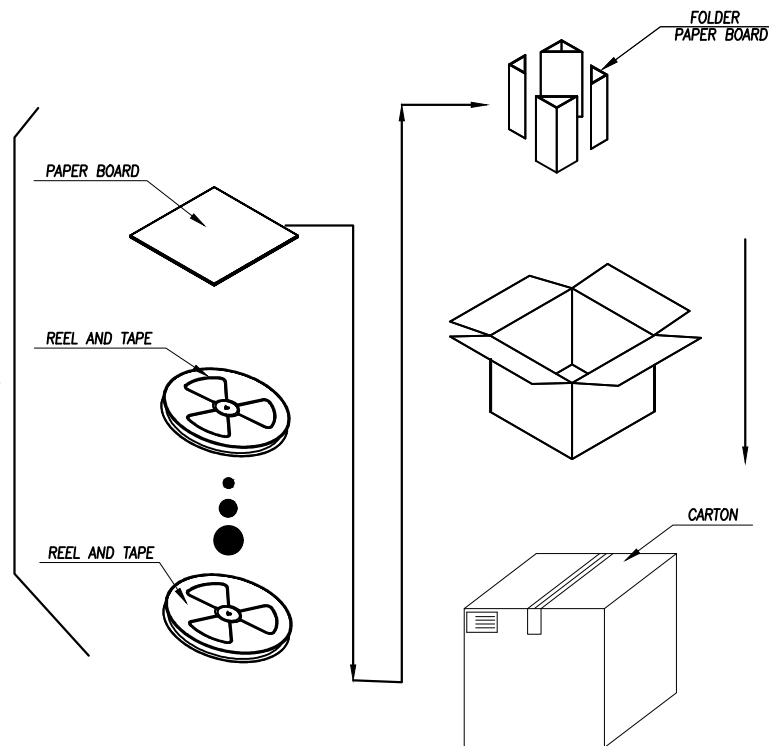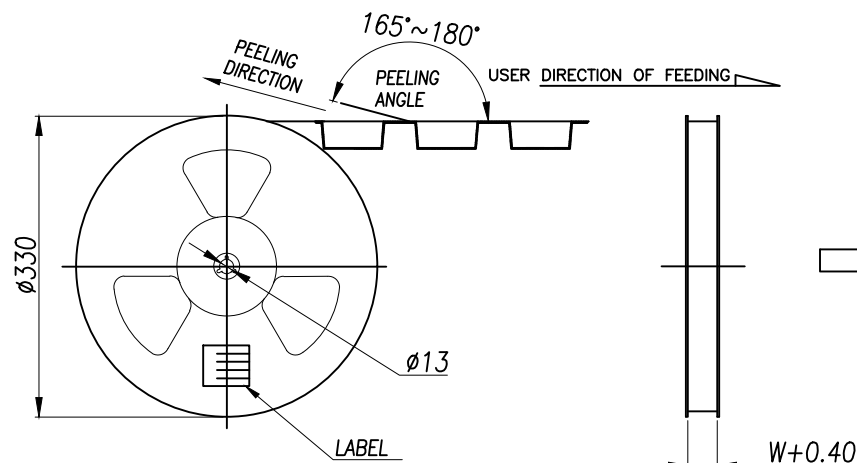

|                                                                        |                        |        |                                                                                                       |                        |                 |       |  |       |  |
|------------------------------------------------------------------------|------------------------|--------|-------------------------------------------------------------------------------------------------------|------------------------|-----------------|-------|--|-------|--|
| GENERAL TOLERANCES<br>(UNLESS SOECIFIED)                               | SCALE: 1:1<br>UNIT: MM |        |  <div>瑾珩精密</div> |                        |                 |       |  |       |  |
|                                                                        | DRAWN BY               |        |                                                                                                       |                        |                 |       |  |       |  |
|                                                                        | LUDAH                  |        | TITLE: 天线弹片<br>H2.40 ANTENNA SPRING<br>TERMINAL,T=0.10MM                                              |                        | MANUFACTURE DWG |       |  |       |  |
|                                                                        | CHEVKED BY             |        |                                                                                                       |                        |                 |       |  |       |  |
| DISTANCE ANGLE                                                         |                        | /      |                                                                                                       | PART NO.<br>TP-T0-2411 |                 | SCALE |  | SHEET |  |
| X. ±0.30    X.* ±2.0°                                                  |                        |        |                                                                                                       |                        |                 | N:A   |  | 2:2   |  |
| .X ±0.20    .X* ±1.0°                                                  |                        |        |                                                                                                       |                        |                 |       |  |       |  |
| .XX ±0.15    .XX* ±0.5°                                                |                        |        |                                                                                                       |                        |                 |       |  |       |  |
| DRAFT WHERE APPLICABLE APPROVED BY<br>MUST REMAIN<br>WITHIN DIMENSIONS |                        |        |                                                                                                       |                        |                 |       |  |       |  |
|                                                                        |                        | LUJIAH |                                                                                                       |                        |                 |       |  |       |  |